

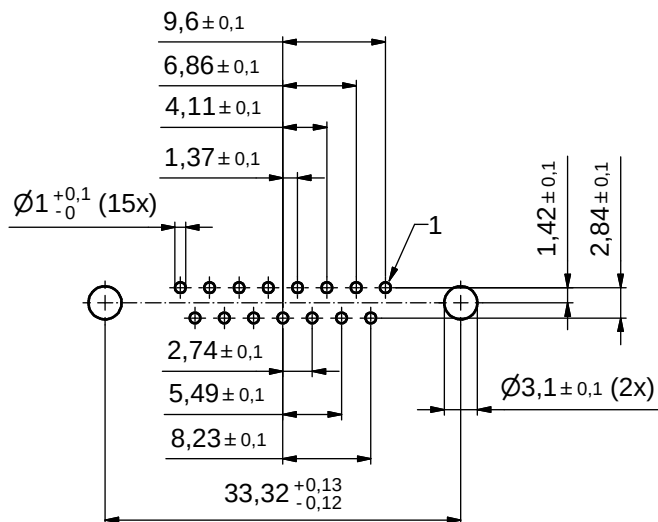
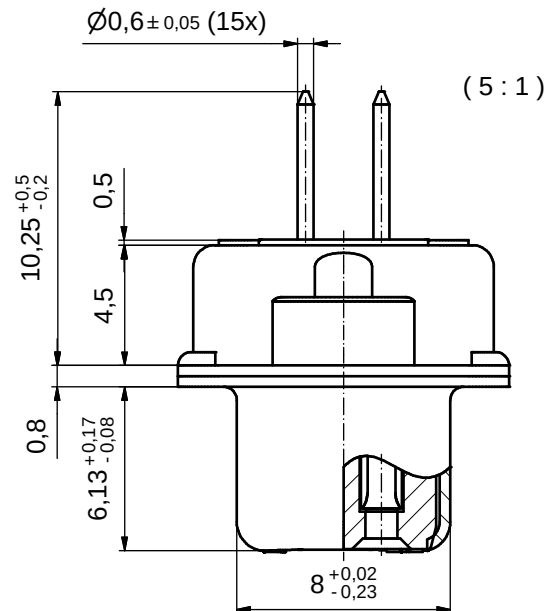



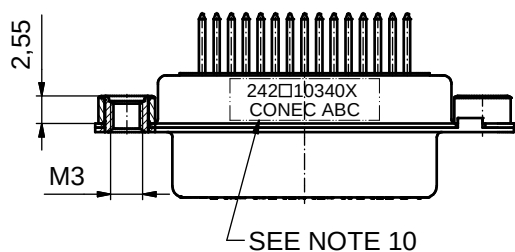


P.C.B. HOLE DRILLINGS  
(P.C.B TOP SIDE)

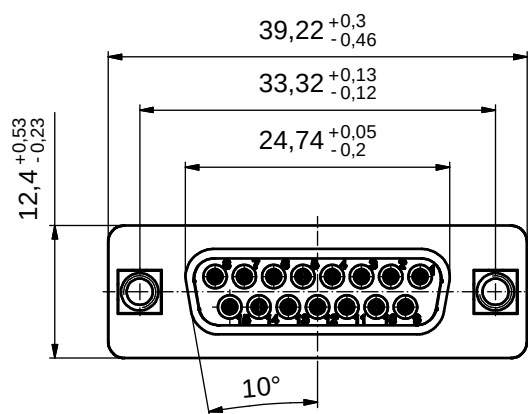

#### NOTES:

- FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):  
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)  
☐ PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL  
☐ PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL  
 CONTACT TAILS PRETINNED
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min 200µin TIN over 80µin NICKEL
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CAPACITANCE: 830pF ± 20%
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 242□10340X CONEC ABC (see note 4)

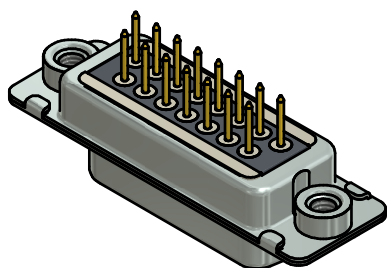

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

|      |             |      |      | tolerance |          |              | dim. in mm |
|------|-------------|------|------|-----------|----------|--------------|------------|
| rev. | description | date | name | date      | name     |              |            |
| a    | Original    |      |      | drawn     | 18.11.13 | Schmidt      |            |
|      |             |      |      | appd.     | 18.11.13 | Lehmenkühler |            |
|      |             |      |      | norm      |          |              |            |
|      |             |      |      | d-old     |          |              |            |

**CONEC**®

|                                                                                    |        |
|------------------------------------------------------------------------------------|--------|
| scale: 2:1 (5:1)                                                                   |        |
| material: SEE NOTES                                                                |        |
| title: D-SUB C-FILTER FEMALE<br>15pos. SOLDER PIN STRAIGHT<br>with threaded insert |        |
| dwg no: 24K1A1484                                                                  | DIN-A3 |
| part no: 242□10340X (see note 4)                                                   | sh: 1  |



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ