

MICROSERIES MRS 48Vuc 1CO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com



Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

General ordering data

Order No.	8556040000
Part designation	MRS 48Vuc 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, Rated control voltage: 48 V UC ±10 %, Screw connection
GTIN (EAN)	4032248195169
Qty.	10 pc(s).

MICROSERIES MRS 48Vuc 1CO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Dimensions

Length	93 mm	Width	6.1 mm
Height	92 mm		

Temperature

Ambient temperature (operational)	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

Input

Rated voltage	300 V	Rated control voltage	48 V UC ±10 %
Response / drop-out voltage AC coil	29 V / 11 V	Pull-in (sparkover) / drop-out voltage DC coil	29 V / 11 V
Rated current AC	5 mA	Rated current DC	4 mA
Pull-in / drop-out current, AC coil	2.2 mA / 1.3 mA	Pull-in / drop-out current, DC coil	2,2 mA / 1,3 mA
Power rating	190 mW	Status indicator	Green LED

Output

Continuous current	6 A	Max. switching current	6 A
Max. switching frequency at rated load	0.1 Hz	Switch-off delay	7.5 ms
Switch-on delay	9.3 ms	Switching voltage AC, max.	250 V
making current	6 A	max. switching capacity	1500 VA
min. switching capacity	12 V / 100 mA		

Contact data

Contact design	CO contact	No. of contacts	1
Contact material	AgSnO	Mechanical service life	20 x 10 ⁶ switching cycles

Rated data

Conductor connection system	Screw connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	≥ 5.5 mm	Dielectric strength to mounting rail	4 kV _{eff} / 1 min.
Impulse withstand voltage	6 kV (1.2/50 µs)	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	Yes	Rated voltage	300 V

Other technical data

Bridge rectifier	Yes	Free-wheel diode	Yes
Reverse polarity protection	Available	Status indicator	Green LED
Version	Relay coupler		

Approvals

Approvals institutes	CSA; CULUS; CURUS; GOSTME25; CE
----------------------	------------------------------------

MICROSERIES MRS 48Vuc 1CO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Classifications

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

Notes


Note, technical data	Cross-connectors and markers - refer to MICROSERIES accessories
----------------------	---

MICROSERIES MRS 48Vuc 1CO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

Electric symbol

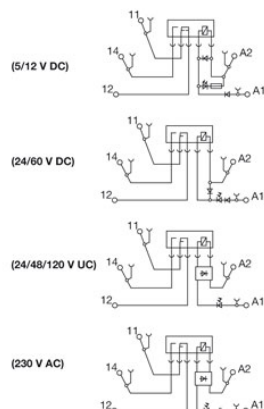



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ