


FineAdjust  
Applicator**molex**Application Tooling  
Specification Sheet

Order No. 63900-7600

## FEATURES

- Directly adapts to most automatic wire processing machines
- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other


## SCOPE

Products: 2.00mm (.079") Pitch Crimp Terminal, 22-28 AWG.

| Terminal Series No. | Terminal Order No. | Wire Size |                 | *Insulation Diameter |              | Strip Length |           |
|---------------------|--------------------|-----------|-----------------|----------------------|--------------|--------------|-----------|
|                     |                    | AWG       | mm <sup>2</sup> | mm                   | In.          | mm           | In.       |
| 56086               | 56086-8000         | 22-28     | 0.34-0.08       | 0.85-1.50            | .033-.059    | 1.60-2.10    | .063-.083 |
| 59370               | 59370-8000         | 22-28     | 0.34-0.08       | 1.50 Maximum         | .059 Maximum | 1.60-2.10    | .063-.083 |

\* Note: 56086 - Insulation OD: 1.15-1.45mm will provide optimum A-620 crimps  
59370 - Insulation OD: 1.10-1.50mm will provide optimum A-620 crimps

## DEFINITION OF TERMS

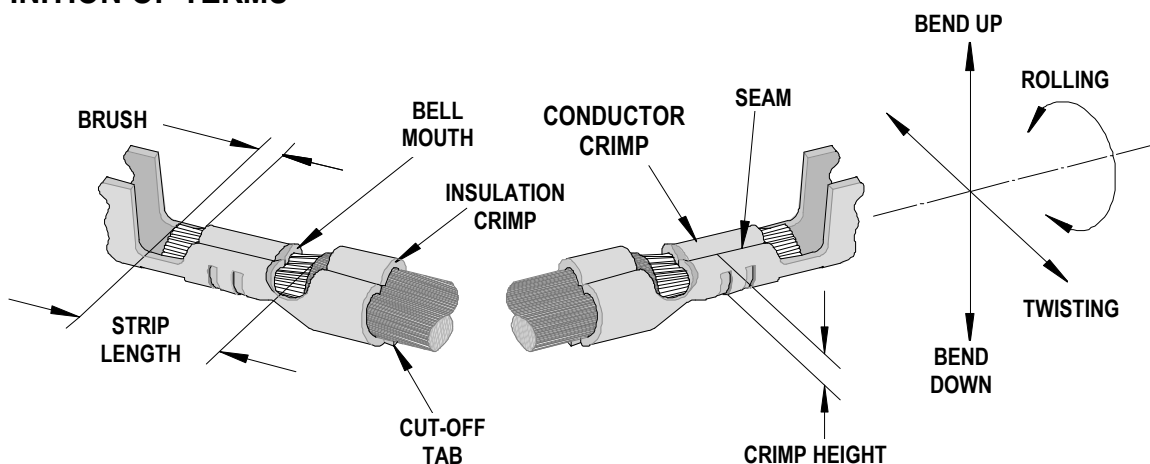

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.

**CRIMP SPECIFICATION**

| Terminal Series No. | Bell mouth |           | Cut-off Tab Maximum |      | Conductor Brush |           |
|---------------------|------------|-----------|---------------------|------|-----------------|-----------|
|                     | Mm         | In.       | mm                  | In.  | mm              | In.       |
| 56086               | 0.05-0.30  | .002-.012 | 0.25                | .010 | 0.00-0.60       | .000-.024 |
| 59370               | 0.05-0.30  | .002-.012 | 0.25                | .010 | 0.00-0.60       | .000-.024 |

| Terminal Series No. | Bend up   Bend down |   | Twist   Roll |   | Punch Width mm (Ref) |      |            |      | Seam                                                                      |
|---------------------|---------------------|---|--------------|---|----------------------|------|------------|------|---------------------------------------------------------------------------|
|                     |                     |   |              |   | Conductor            |      | Insulation |      |                                                                           |
|                     | Degree              |   | Degree       |   | mm                   | In   | mm         | In   |                                                                           |
| 56086               | 4                   | 2 | 3            | 8 | 1.20                 | .047 | 1.60       | .063 | Seam shall not be open<br>and no wire allowed out<br>of the crimping area |
| 59370               | 3                   | 3 | 3            | 6 | 1.20                 | .047 | 1.60       | .063 |                                                                           |

After crimping, the conductor profile should measure the following.

| Terminal Series No. | Wire Size |                 | Conductor Crimp Height |           | Insulation Crimp Height (Ref) |      | Pull Force Minimum |      |
|---------------------|-----------|-----------------|------------------------|-----------|-------------------------------|------|--------------------|------|
|                     | AWG       | mm <sup>2</sup> | mm                     | In.       | mm                            | In.  | N                  | Lb.  |
| 56086               | 22        | 0.34            | 0.84-0.89              | .033-.035 | 2.05                          | .081 | 44.1               | 9.91 |
|                     | 24        | 0.20            | 0.76-0.81              | .030-.032 | 2.00                          | .079 | 29.4               | 6.61 |
|                     | 26        | 0.12            | 0.71-0.76              | .028-.030 | 1.90                          | .075 | 19.6               | 4.41 |
|                     | 28        | 0.08            | 0.67-0.72              | .026-.028 | 1.75                          | .069 | 9.8                | 2.21 |
| 59370               | 22        | 0.34            | 0.70-0.75              | .027-.029 | 1.75                          | .069 | 44.1               | 9.91 |
|                     | 24        | 0.20            | 0.67-0.72              | .026-.028 | 1.70                          | .067 | 29.4               | 6.61 |
|                     | 26        | 0.12            | 0.61-0.66              | .024-.026 | 1.60                          | .063 | 19.6               | 4.41 |
|                     | 28        | 0.08            | 0.57-0.62              | .022-.024 | 1.35                          | .053 | 9.8                | 2.21 |


**Tool Qualification Notes:**

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

**PARTS LIST**

| <b>FineAdjust Applicator 63900-7600</b>                                      |                 |                        |                                    |                 |
|------------------------------------------------------------------------------|-----------------|------------------------|------------------------------------|-----------------|
| <b>Item</b>                                                                  | <b>Order No</b> | <b>Engineering No.</b> | <b>Description</b>                 | <b>Quantity</b> |
| <b>Perishable Tooling</b>                                                    |                 |                        |                                    |                 |
|                                                                              | 63900-7670      | 63900-7670             | Tool Kit (All "Y" Items)           | REF             |
| 1                                                                            | 63444-1207      | 63444-1207             | Conductor Punch                    | 1 Y             |
| 2                                                                            | 63445-1213      | 63445-1213             | Conductor Anvil                    | 1 Y             |
| 3                                                                            | 63446-1614      | 63446-1614             | Insulation Punch                   | 1 Y             |
| 4                                                                            | 63445-1624      | 63445-1624             | Insulation Anvil                   | 1 Y             |
| 5                                                                            | 63443-0002      | 63443-0002             | Front Cut-Off Plunger              | 1 Y             |
| 6                                                                            | 63443-0012      | 63443-0012             | Front Plunger Retainer             | 1 Y             |
| <b>Other Components</b>                                                      |                 |                        |                                    |                 |
| 7                                                                            | 11-18-4083      | 60707-8                | Feed Guide                         | 1               |
| 8                                                                            | 63443-0009      | 63443-0009             | Front Scrap Chute                  | 1               |
| 9                                                                            | 63443-0025      | 63443-0025             | Key                                | 1               |
| 10                                                                           | 63443-0090      | 63443-0090             | Wire Stop                          | 1               |
| 11                                                                           | 63443-1716      | 63443-1716             | Height Spacer (18.60mm)            | 1               |
| 12                                                                           | 63443-2217      | 63443-2217             | Coarse Spacer (17.00mm)            | 1               |
| 13                                                                           | 63443-2302      | 63443-2302             | Fine Spacer (3.10mm)               | 1               |
| 14                                                                           | 63443-2802      | 63443-2802             | Front Plunger Striker              | 1               |
| 15                                                                           | 63443-2906      | 63443-2906             | Wire Hold Down Plunger             | 1               |
| 16                                                                           | 63443-6111      | 63443-6111             | Rear Cover                         | 1               |
| 17                                                                           | 63600-0021      | 63600-0021             | Wire Hold Down Spring              | 1               |
| 18                                                                           | 63700-0539      | 63700-0539             | Cut-Off Plunger Spring             | 1               |
| <b>Frame</b>                                                                 |                 |                        |                                    |                 |
| 19                                                                           | 63800-4901      | 63800-4901             | Top                                | 1               |
| 20                                                                           | 63801-3281      | 63801-3281             | Base                               | 1               |
| 21                                                                           | 63801-4650      | 63801-4650             | Track                              | 1               |
| <b>Hardware</b>                                                              |                 |                        |                                    |                 |
| 22                                                                           | N/A             | N/A                    | M3 by 6 Long SHCS                  | 2**             |
| 23                                                                           | N/A             | N/A                    | M3 by 6 Long FHCS                  | 1**             |
| 24                                                                           | N/A             | N/A                    | M4 by 6 Long SHCS                  | 2**             |
| 25                                                                           | N/A             | N/A                    | M4 by 12 Long BHCS                 | 2**             |
| 26                                                                           | N/A             | N/A                    | M4 by 50 Long SHCS                 | 2**             |
| 27                                                                           | N/A             | N/A                    | M5 by 12 Lg SHCS                   | 1**             |
| 28                                                                           | N/A             | N/A                    | #10-32 by 3/8" Long Flat Point SSS | 1**             |
| 29                                                                           | N/A             | N/A                    | #10-32 Hex Jam Nut                 | 1**             |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). |                 |                        |                                    |                 |

## Assembly Drawing

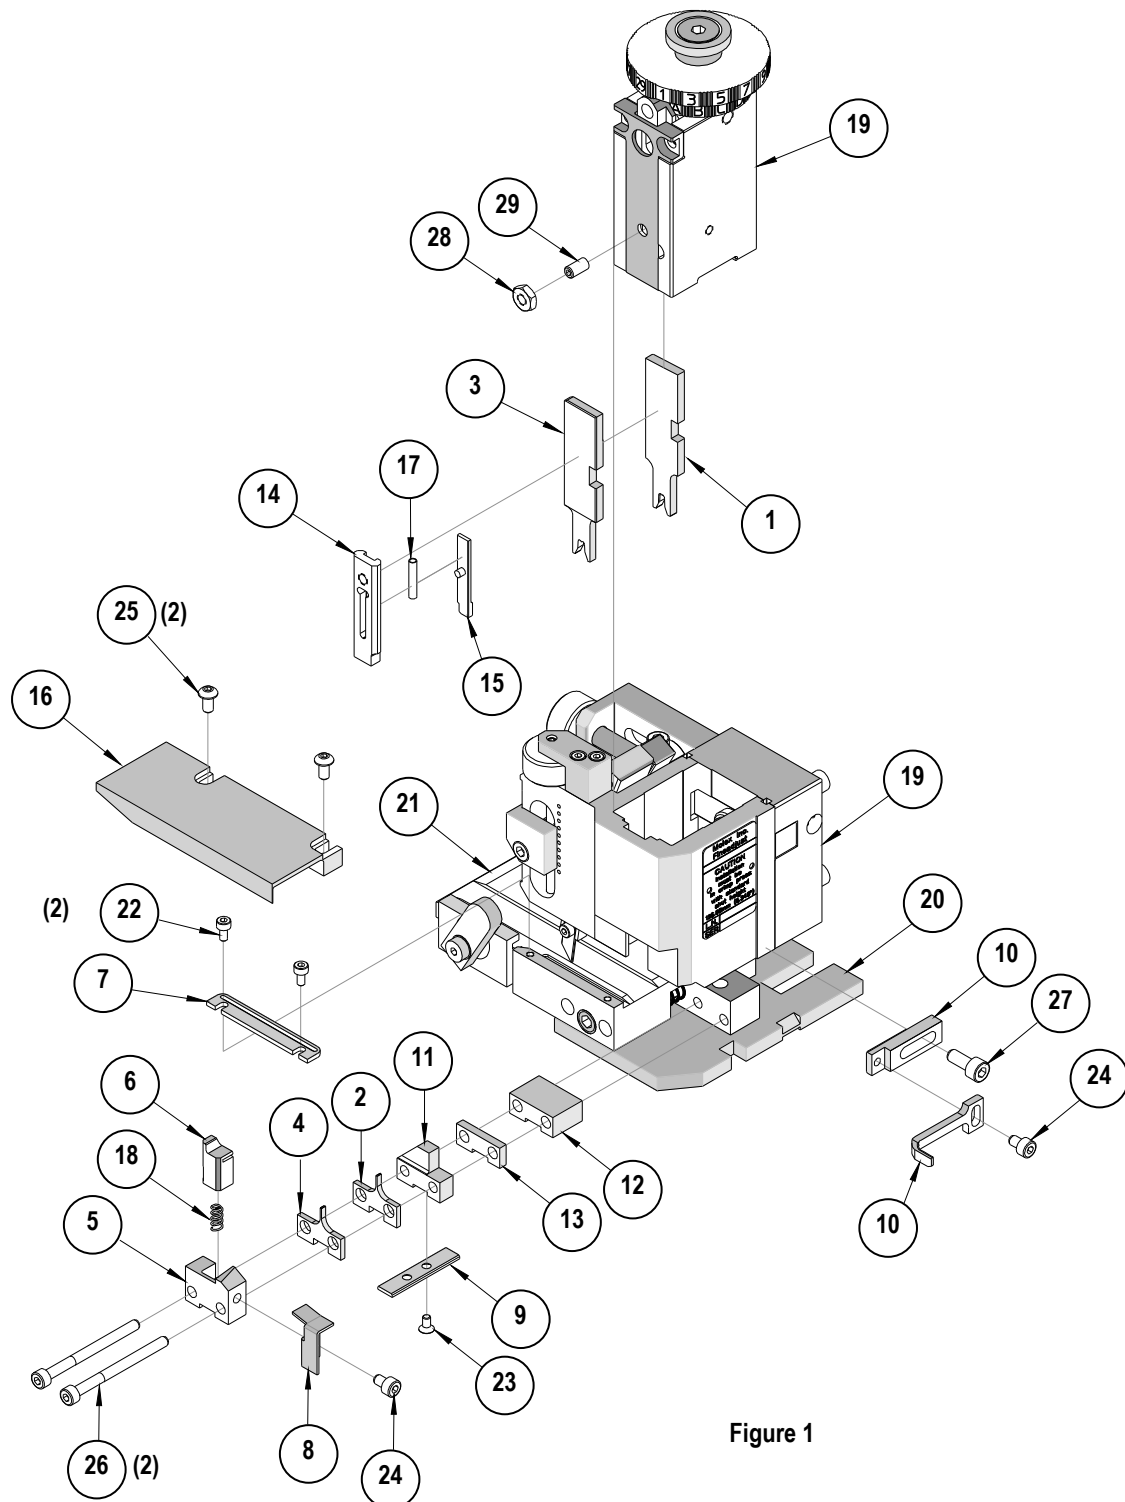

### Figure 1

## NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

**CAUTION:** This applicator should only be used in a press with a shut height of 135.8mm (5.346"). Tooling damage could result at a lower setting.

**CAUTION:** To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Visit our Web site at <http://www.molex.com>



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ