

### Description

The GM393 consists of two independent precision voltage comparators with an offset voltage specification as low as 2.0 mV max for two comparators which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. These comparators also have a unique characteristic. In that, the input common-mode voltage range includes ground, even though operated from a single power supply voltage.

Application areas include limit comparators, simple analog to digital converters; pulse, square wave and time delay generators; wide range VCO; MOS clock timers; multivibrators and high voltage digital logic gates. The GM393 are designed to directly interface with TTL and CMOS. When operated from both plus and minus power supplies, the GM393 will directly interface with MOS logic, where their low power drain is a distinct advantage over standard comparators.

The GM393 is available in DIP-8 and SOP-8 packages.

### Features

- ◆ Single- supply Range:  $\pm 1.0V$  to  $\pm 18V$
- ◆ Wide supply voltage range:  $\pm 2.0V$  to  $\pm 36V$
- ◆ Very low supply current drain (0.4 mA) -
- ◆ independent of supply voltage
- ◆ Low input biasing current: 25 nA
- ◆ Low input offset current:  $\pm 5$  nA
- ◆ Maximum offset voltage:  $\pm 3$  mV
- ◆ Input common-mode voltage range includes ground
- ◆ Differential input voltage range equal to the power supply voltage
- ◆ Low output saturation voltage: 250 mV at 4 mA
- ◆ Output voltage compatible with TTL, DTL, ECL, MOS and CMOS logic systems

### Application

High precision comparators


Simple Analog to Digital Converters

Pulse, Square Wave Generators


Wide Range VCO

MOS Clock Timer

### Connecting Diagram

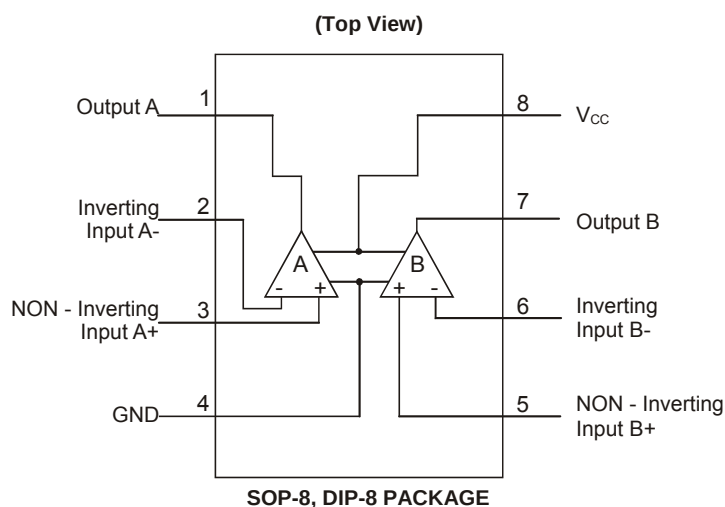

### Marking Information and Pin Configurations (Top View)

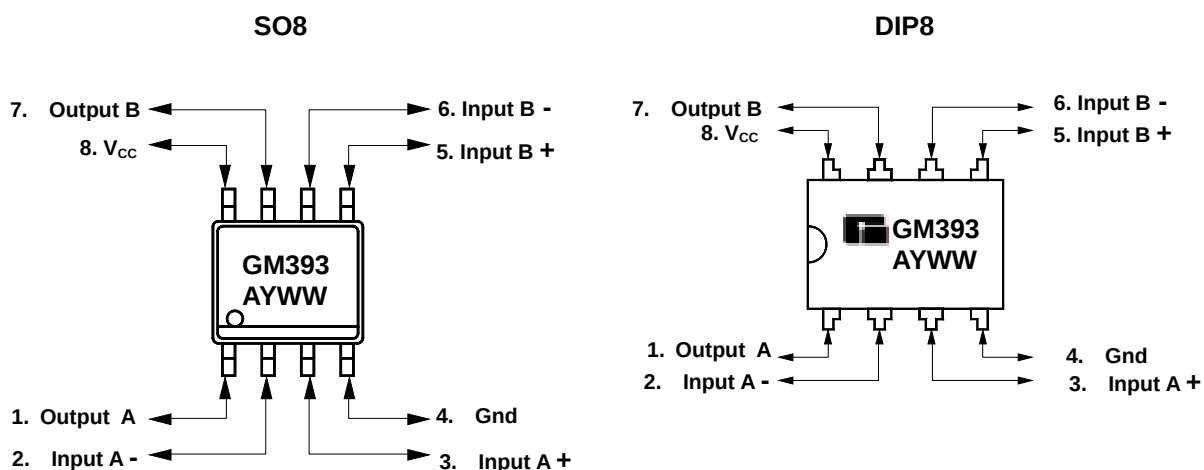

A: Assembly / Test site code  
Y: Year  
WW: Week


### Ordering Information

| Ordering Number | Package | Shipping                  |
|-----------------|---------|---------------------------|
| GM393D8T        | DIP-8   | 60 Units / Tube           |
| GM393S8T        | SOP-8   | 100 Units / Tube          |
| GM393S8R        | SOP-8   | 2,500 Units / Tape & Reel |

## Absolute Maximum Ratings

| PARAMETER                            |       | RATINGS        | UNITS |
|--------------------------------------|-------|----------------|-------|
| Supply Voltage                       |       | $\pm 18$ or 36 | V     |
| Input Current                        |       | 50             | mA    |
| Input Voltage                        |       | -0.3 to +32    | V     |
| Power dissipation                    | DIP 8 | 780            | mW    |
|                                      | SO 8  | 510            |       |
| Operating Temperature Range          |       | -40 to 125     |       |
| Storage Temperature                  |       | - 65 to 150    |       |
| Lead Temperature (soldering 10 sec.) |       | 260            |       |

## Block Diagram

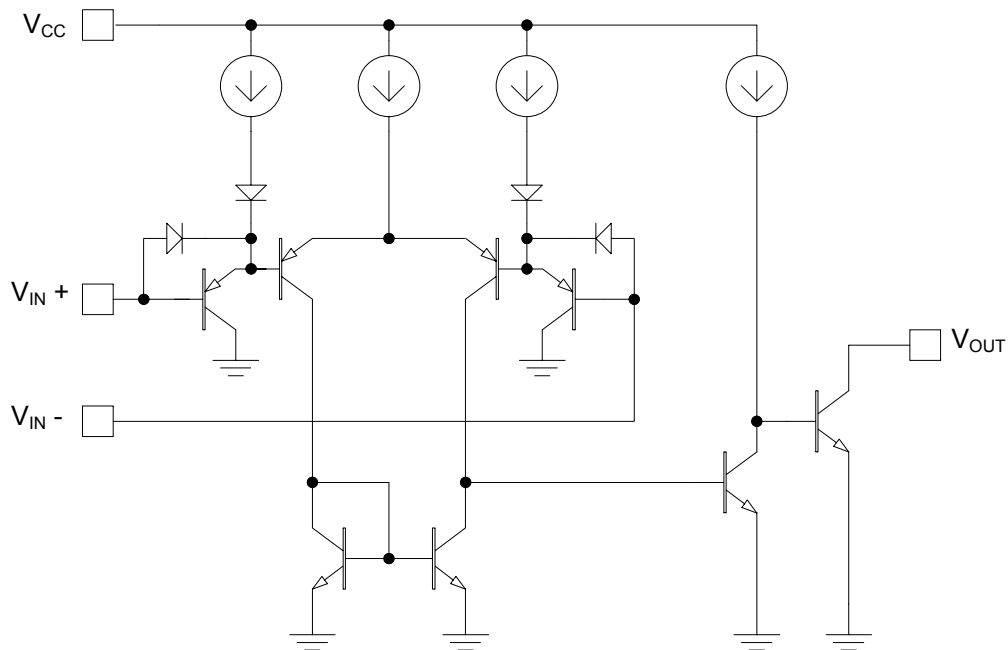

### Electrical Characteristics ( $V_{CC} = 5V$ , at specified free-air temperature, unless otherwise specified)


| Parameter                                       | Symbol    | Condition                                                          |                                     | Min                | Typ     | Max       | Unit    |
|-------------------------------------------------|-----------|--------------------------------------------------------------------|-------------------------------------|--------------------|---------|-----------|---------|
| Input offset Voltage                            | $V_{IO}$  | $V_{CC} = 5V$ to Max<br>$V_{IC} = V_{ICR}$ min<br>$V_O = 1.4V$     | $T_A = 25$                          |                    | $\pm 2$ | $\pm 5$   | mV      |
|                                                 |           |                                                                    | Full Range                          |                    |         | 9         |         |
| Input Offset Current                            | $I_{IO}$  | $V_O = 1.4V$                                                       | $T_A = 25$                          |                    | $\pm 5$ | $\pm 50$  | nA      |
|                                                 |           |                                                                    | Full Range                          |                    |         | $\pm 150$ |         |
| Input Bias Current                              | $I_{IB}$  | $V_O = 1.4V$                                                       | $T_A = 25$                          |                    | -20     | -250      | nA      |
|                                                 |           |                                                                    | Full Range                          |                    |         | 400       |         |
| Common-Mode Input Voltage Range**               | $V_{ICR}$ |                                                                    | $T_A = 25$                          | 0 to $V_{CC}-1.5V$ |         |           | V       |
|                                                 |           |                                                                    | Full Range                          | 0 to $V_{CC}-2.0V$ |         |           |         |
| High-Level output Voltage                       | $V_{OL}$  | $I_{OL} = 4mA$ , $V_{ID} = 1V$                                     | $T_A = 25$                          |                    | 150     | 400       | mV      |
|                                                 |           |                                                                    | Full Range                          |                    |         | 700       |         |
| Large-Signal Differential Voltage Amplification | $A_{VD}$  | $V_{CC} = 15V$ ,<br>$V_O = 1V$ to $11V$<br>$R_L = 15K$ to $V_{CC}$ | $T_A = 25$                          | 50                 | 200     |           | V/mV    |
| High Level Output Current                       | $I_{OH}$  | $V_{OH} = 5V$ , $V_{ID} = 1V$                                      | $T_A = 25$                          |                    | 0.1     | 50        | nA      |
|                                                 |           | $V_{OH} = 30V$ , $V_{ID} = 1V$                                     | Full Range                          |                    | 1       |           | $\mu A$ |
| Low Level Output Current                        | $I_{OL}$  | $V_{OH} = 1.5V$ , $V_{ID} = -1V$                                   | $T_A = 25$                          | 6                  |         |           | mA      |
| Supply Current                                  | $I_{CC}$  | $R_L = \infty$ , $V_{CC} = 5V$                                     | $T_A = 25$                          |                    | 0.8     | 1.0       | mA      |
|                                                 |           | $R_L = \infty$ , $V_{CC} = 30V$                                    | Full Range                          |                    |         | 2.5       |         |
| Response Time (Note 1)                          |           | $R_L$ Connected to 5V through 5.1k.<br>$C_L = 15pF$                | 100mV input step with 5mV overdrive |                    | 1.3     |           | $\mu s$ |
|                                                 |           |                                                                    | TTL - level input step              |                    | 0.3     |           |         |

All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified.  
"MAX"  $V_{CC}$  for testing purposes is 30V. Full range is 0°C to 70°C.


\*\* The voltage at either input or common - mode should not be allowed to go negative by more than 0.3V. The upper end of the common - mode voltage range is  $V_{CC} - 1.5V$ , but either or both inputs can go to 30V without damage.

Note 1:  $C_L$  includes probe and jig capacitance. The response time specified is the interval between the input step function and the instant when the output crosses 1.4V.


## Typical Performance Characteristics

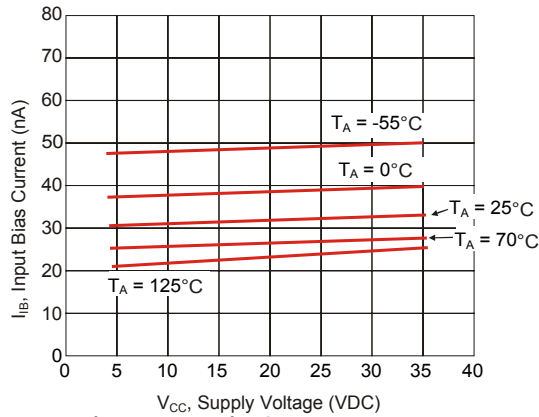

**Figure 1. Input Bias Current versus Power Supply Voltage**

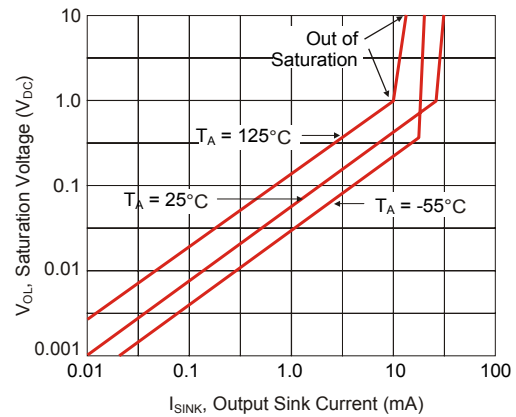


**Figure 2. Output Saturation Voltage v.s. Output Sink Current**

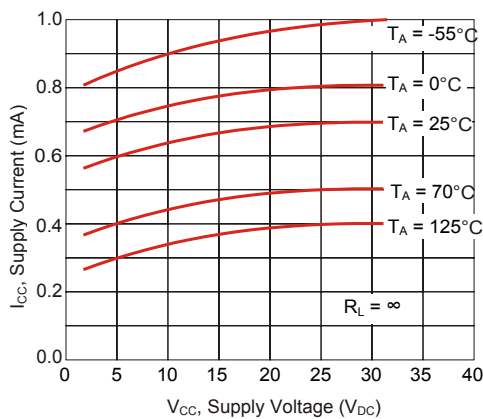


**Figure 3. Power Supply Current versus Power Supply Voltage**

## Package Outline Dimensions – SO 8

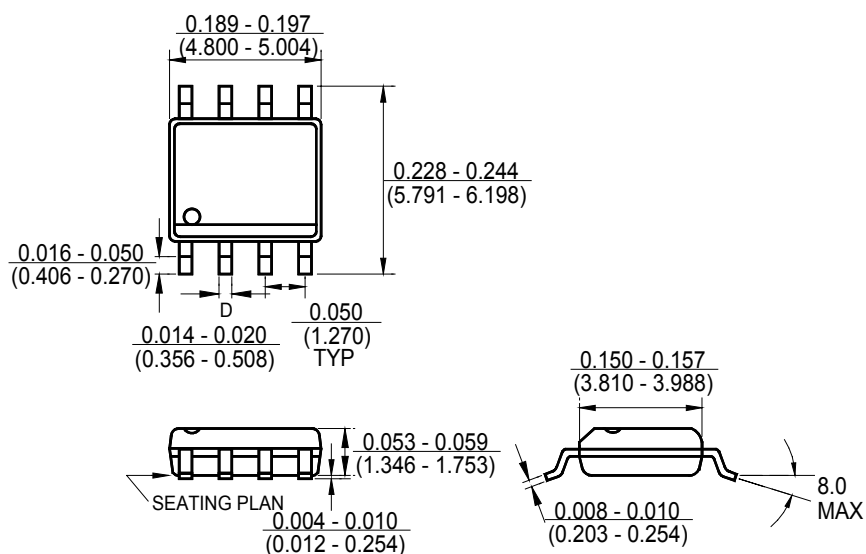

## Package Outline Dimensions – DIP 8

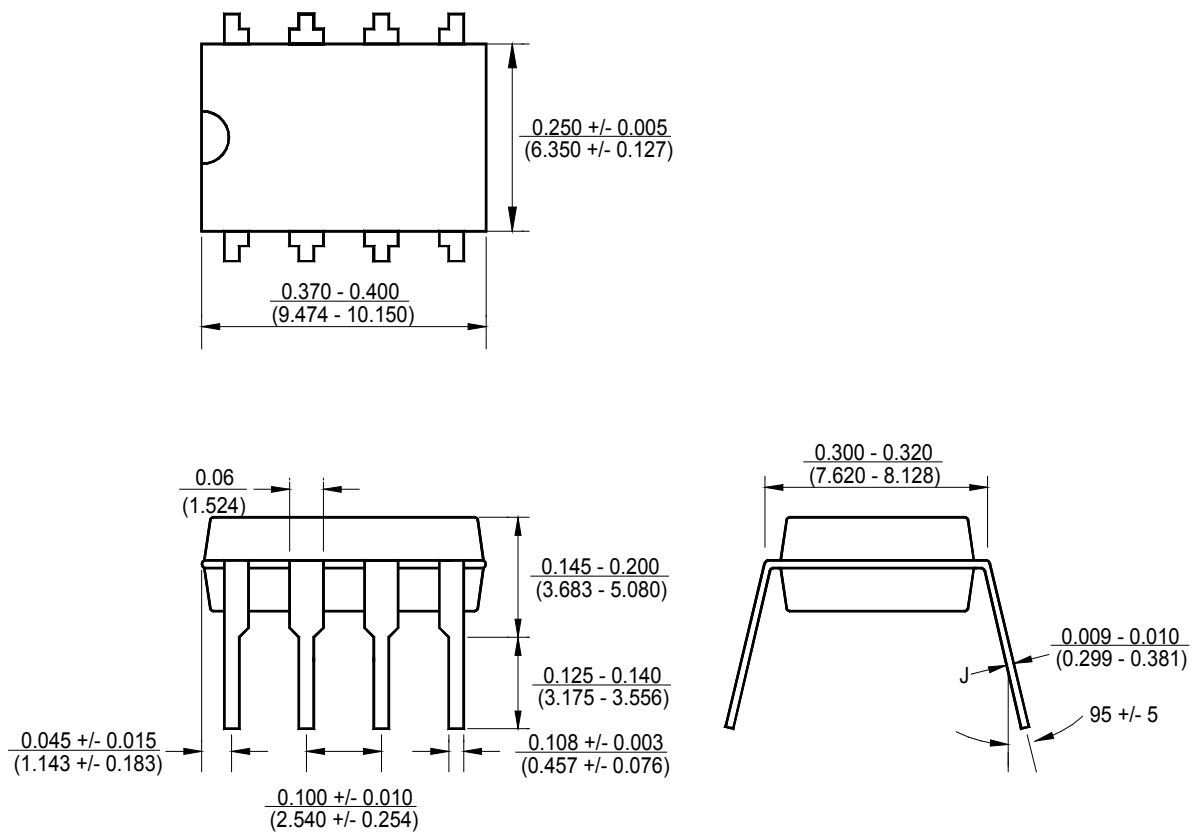

## Ordering Number

**GM**   **393**   **S8**   **R**

| Circuit Type | Circuit Type | Package Type          | Shipping Type               |
|--------------|--------------|-----------------------|-----------------------------|
|              |              | S8: SO 8<br>D8: DIP 8 | R: Taping & Reel<br>T: Tube |



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ