



ACS102-6T

AC switch family Transient protected AC switch (ACS™)

Main product characteristics

| | |
|-------------------|-------|
| $I_{T(RMS)}$ | 0.2 A |
| V_{DRM}/V_{RRM} | 600 V |
| I_{GT} | 5 mA |

- Overvoltage protection by crowbar technology
- High noise immunity - static $dV/dt > 300 \text{ V}/\mu\text{s}$

Applications

- AC ON/OFF static switching in appliances and industrial control systems
- Drive of low power high inductive or resistive loads like:
 - relay, valve, solenoid,
 - dispenser, door lock
 - micro-motor


Benefits

- Needs no external protection snubber or varistor.
- Enables equipment to meet IEC 61000-4-5.
- Reduces component count by up to 80%.
- Interfaces directly with the micro-controller.
- Common package tab connection supports connection of several alternating current switches (ACS) on the same cooling pad.
- Integrated structure based on ASD^(a) technology

Order code

| Part number | Marking |
|---------------|----------|
| ACS102-6TA | ACS1026T |
| ACS102-6TA-TR | ACS1026T |
| ACS102-6T1 | ACS1026T |
| ACS102-6T1-TR | ACS1026T |

a. ASD: Application Specific Devices

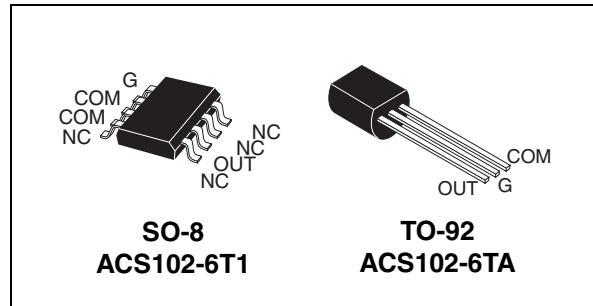


Description

The ACS102-6T belongs to the AC line switch family. This high performance switch can control a load of up to 0.2A.

The ACS102-6T switch includes an overvoltage crowbar structure to absorb the overvoltage energy, and a gate level shifter driver to separate the digital controller from the main switch. It is triggered with a negative gate current flowing out of the gate pin.

Functional diagram

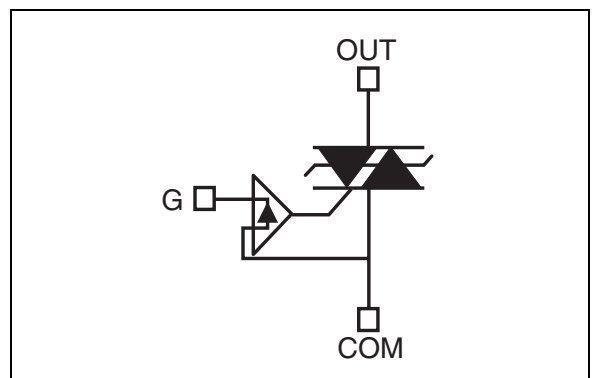

COM Common drive reference to connect to the mains

OUT Output to connect to the load.

G Gate input to connect to the controller through gate resistor

TM: ACS is a trademark of STMicroelectronics

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified)

| Symbol | Parameter | | | Value | Unit |
|--------------|--|-------------------------------|---------------------------------|-------------|------------------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave) | TO-92 | $T_{amb} = 100^{\circ}\text{C}$ | 0.2 | A |
| | | SO-08 | $T_{amb} = 100^{\circ}\text{C}$ | | |
| I_{TSM} | Non repetitive surge peak on-state current (full cycle sine wave, T_j initial = 25°C) | f = 60 Hz | t = 16.7 ms | 7.6 | A |
| | | f = 50 Hz | t = 20 ms | 7.3 | |
| I^2t | I^2t Value for fusing | $t_p = 10\text{ ms}$ | | 0.38 | A^2s |
| di/dt | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $t_r \leq 100\text{ ns}$ | f = 120 Hz | $T_j = 125^{\circ}\text{C}$ | 50 | $\text{A}/\mu\text{s}$ |
| V_{PP} | Non repetitive line peak mains voltage ⁽¹⁾ | | $T_j = 25^{\circ}\text{C}$ | 2 | kV |
| I_{GM} | Peak gate current | $t_p = 20\text{ }\mu\text{s}$ | $T_j = 125^{\circ}\text{C}$ | 1 | A |
| V_{GM} | Peak positive gate voltage | | $T_j = 125^{\circ}\text{C}$ | 10 | V |
| $P_{G(AV)}$ | Average gate power dissipation | | $T_j = 125^{\circ}\text{C}$ | 0.1 | W |
| T_{stg} | Storage junction temperature range | | | -40 to +150 | $^{\circ}\text{C}$ |
| T_j | Operating junction temperature range | | | -30 to +125 | |

1. according to test described by IEC 61000-4-5 standard and [Figure 16](#)

Table 2. Electrical characteristics ($T_j = 25^{\circ}\text{C}$, unless otherwise specified)

| Symbol | Test conditions | Quadrant | | Value | Unit |
|-------------------|---|----------|-----|-------|------------------------|
| $I_{GT}^{(1)}$ | $V_{OUT} = 12\text{ V}$, $R_L = 33\text{ }\Omega$ | II - III | MAX | 5 | mA |
| V_{GT} | | II - III | MAX | 0.9 | V |
| V_{GD} | $V_{OUT} = V_{DRM}$, $R_L = 3.3\text{ k}\Omega$, $T_j = 125^{\circ}\text{C}$ | II - III | MIN | 0.15 | V |
| $I_H^{(2)}$ | $I_{OUT} = 100\text{ mA}$ | | MAX | 20 | mA |
| $I_L^{(2)}$ | $I_G = 1.2 \times I_{GT}$ | | MAX | 25 | mA |
| $dV/dt^{(2)}$ | $V_{OUT} = 67\% V_{DRM}$, gate open, $T_j = 125^{\circ}\text{C}$ | | MIN | 300 | $\text{V}/\mu\text{s}$ |
| $(di/dt)_c^{(2)}$ | Without snubber (15 $\text{V}/\mu\text{s}$), turn-off time $\leq 20\text{ ms}$, $T_j = 125^{\circ}\text{C}$ | | MIN | 0.15 | A/ms |
| V_{CL} | $I_{CL} = 0.1\text{ mA}$, $t_p = 1\text{ ms}$, $T_j = 125^{\circ}\text{C}$ | | MIN | 650 | V |

1. minimum I_{GT} is guaranteed at 10% of $I_{GT}\text{ max}$

2. for both polarities of OUT referenced to COM

Table 3. Static electrical characteristics

| Symbol | Test conditions | | | Value | Unit |
|------------------------|--|----------------------------|-----|-------|---------------|
| $V_{TM}^{(1)}$ | $I_{TM} = 0.3\text{ A}$, $t_p = 380\text{ }\mu\text{s}$ | $T_j = 25^\circ\text{ C}$ | MAX | 1.2 | V |
| $V_{TO}^{(1)}$ | | $T_j = 125^\circ\text{ C}$ | MAX | 0.80 | V |
| $R_D^{(1)}$ | | $T_j = 125^\circ\text{ C}$ | MAX | 500 | m Ω |
| I_{DRM} I_{RRM} | $V_{OUT} = 600\text{ V}$ | $T_j = 25^\circ\text{ C}$ | MAX | 2 | μA |
| | | $T_j = 125^\circ\text{ C}$ | | 0.2 | mA |

1. for both polarities of OUT referenced to COM

Table 4. Thermal resistance

| Symbol | Parameter | | Value | Unit |
|---------------|-----------------------|---------------------------|-------|--------------------|
| $R_{th(j-l)}$ | Junction to lead (AC) | TO-92 | 60 | $^\circ\text{C/W}$ |
| $R_{th(j-a)}$ | Junction to ambient | TO-92 | 150 | |
| | | $S = 40\text{ mm}^2$ SO-8 | 150 | |

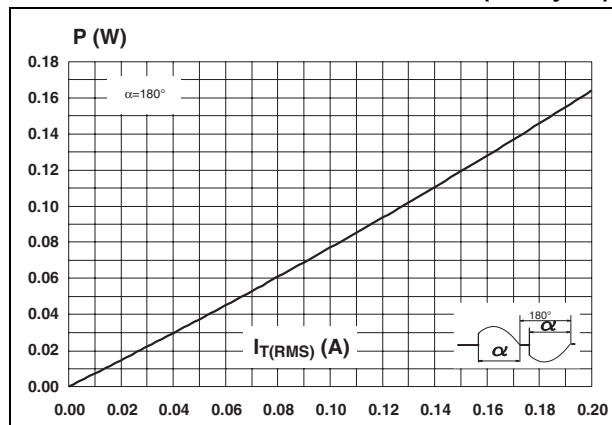
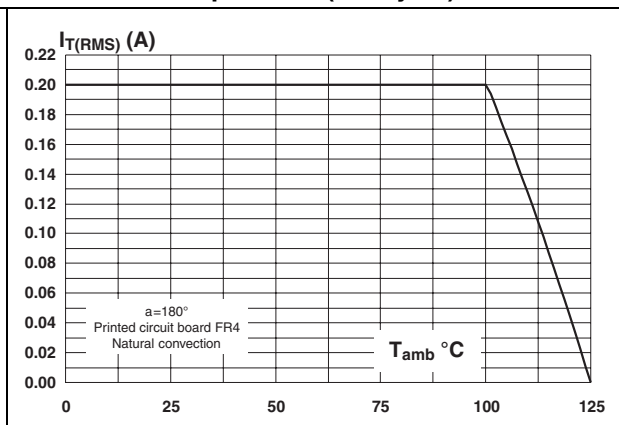
Figure 1. Maximum power dissipation vs RMS on-state current (full cycle)**Figure 2. RMS on-state current vs ambient temperature (full cycle)**

Figure 3. Relative variation of junction to ambient thermal impedance vs pulse duration and package

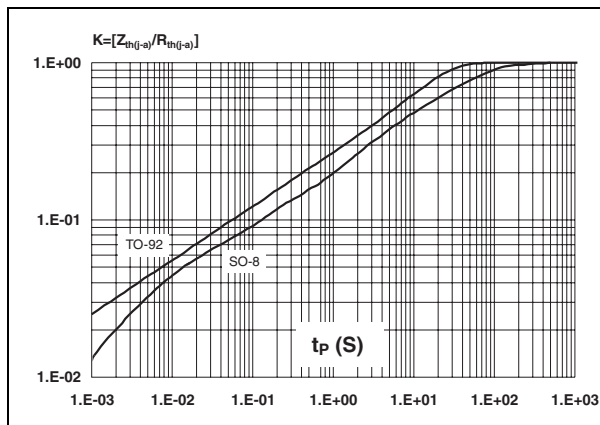


Figure 4. Relative variation of gate trigger current, holding current and latching current vs junction temperature

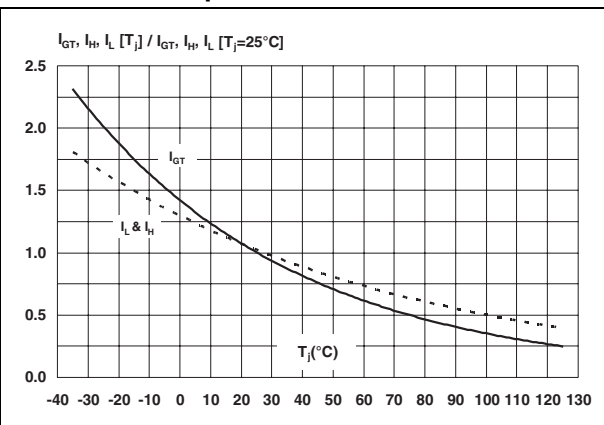


Figure 5. Non repetitive surge peak on-state current vs number of cycles

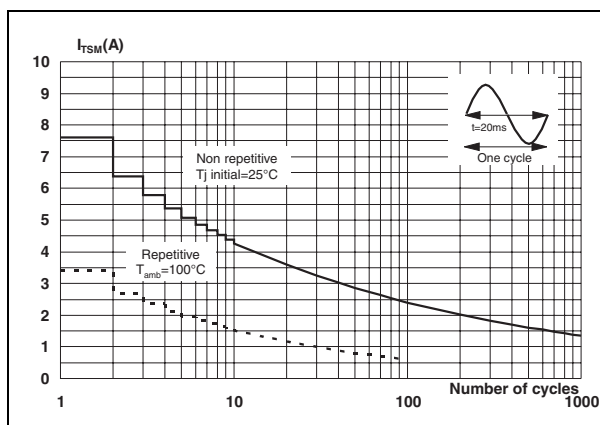


Figure 6. Non repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10$ ms, and corresponding value of I^2t (T_j initial = 25°C).

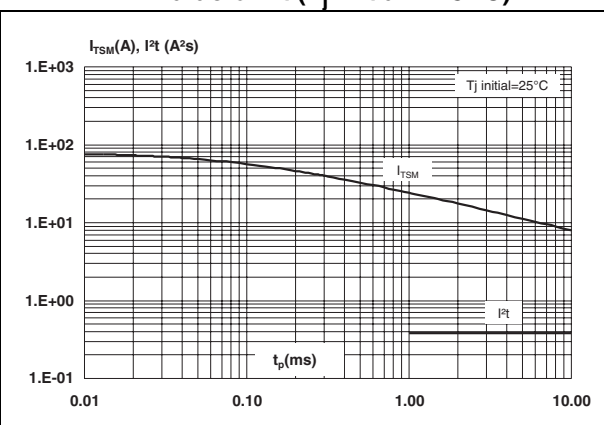


Figure 7. On-state characteristics (maximal values)

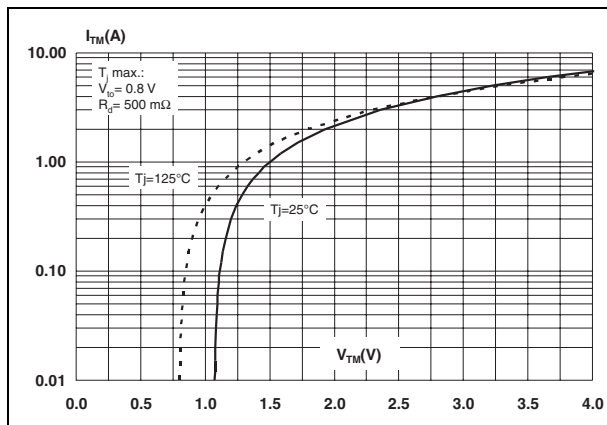


Figure 8. SO-8 junction to ambient thermal resistance versus copper surface under tab (PCB FR4, copper thickness 35 μ m)

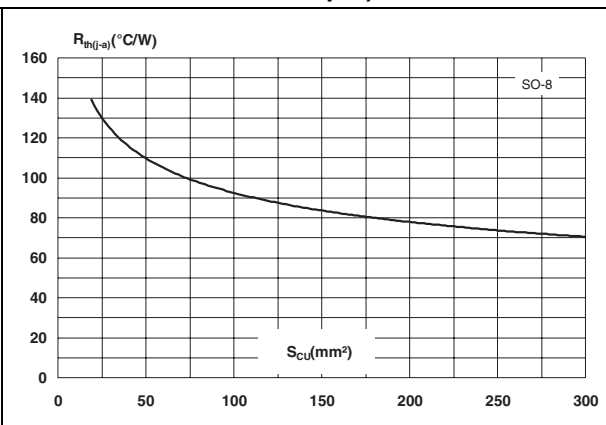


Figure 9. Relative variation of critical rate of decrease of main current $(di/dt)_c$ versus junction temperature

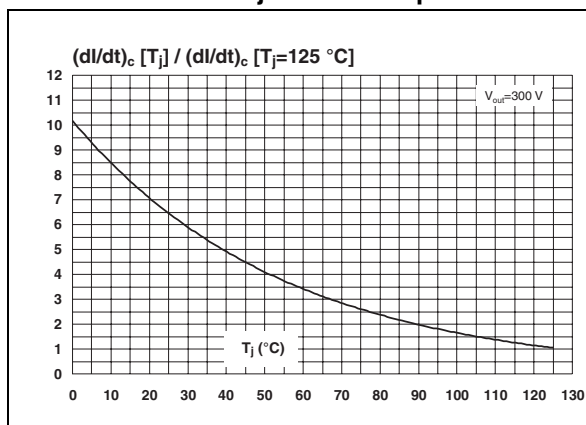


Figure 10. Relative variation of critical rate of decrease of main current $(di/dt)_c$ vs $(dV/dt)_c$, with turn-off time < 20 ms

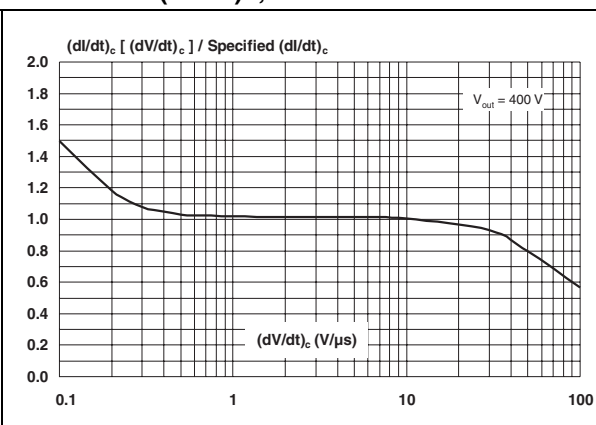


Figure 11. Relative variation of static dV/dt versus junction temperature


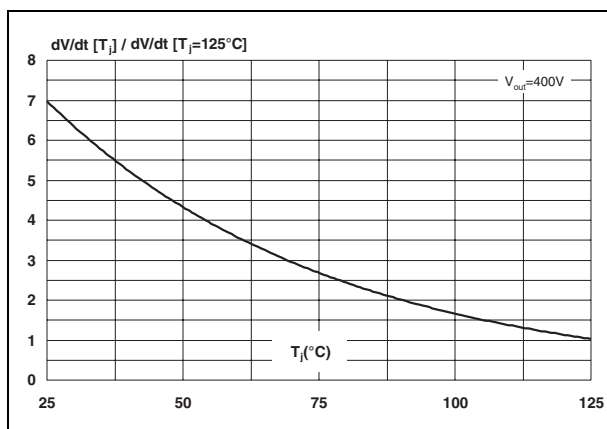


Figure 12. Relative variation of the maximal clamping voltage versus junction temperature (min value)

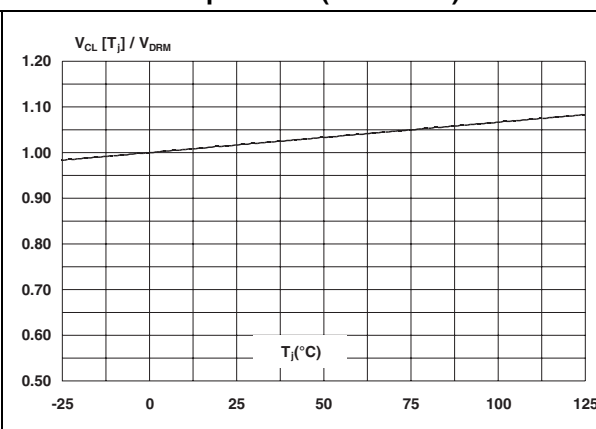


2 AC line switch - basic application

The ACS102-6T switch is triggered by a negative gate current flowing from the gate pin G. The switch can be driven directly by the digital controller through a resistor as shown in [Figure 13](#).

Thanks to its overvoltage protection and turn-off commutation performance, the ACS102-6T switch can drive a small power high inductive load with neither varistor nor additional turn-off snubber.

Figure 13. Typical application program

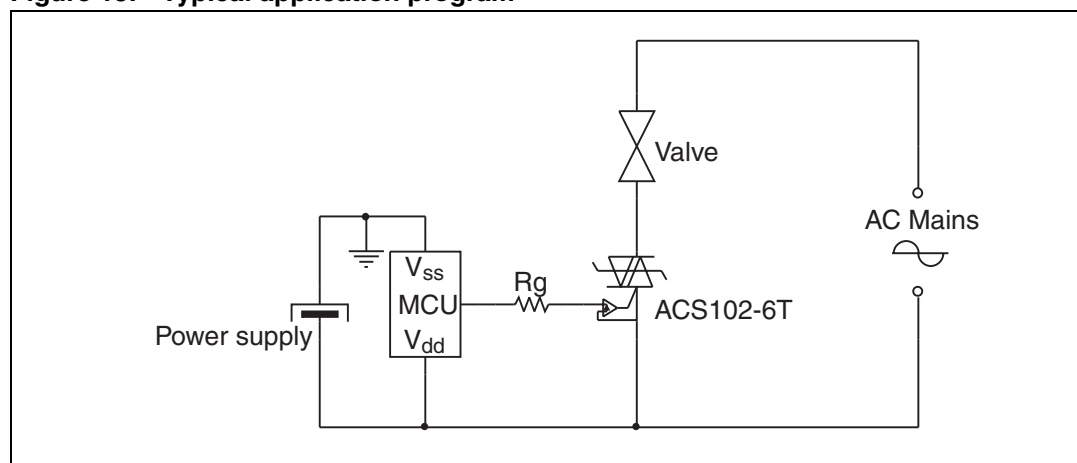

2.1 Protection against overvoltage: the best choice is ACS

In comparison with standard triacs, which are not robust against surge voltage, the ACS102-6T is over-voltage self-protected, specified by the new parameter V_{CL} . This feature is useful in two operating conditions: in case of turn-off of very inductive load, and in case of surge voltage that can occur on the electrical network.

2.1.1 High inductive load switch-off: turn-off overvoltage clamping

With high inductive and low RMS current loads the rate of decrease of the current is very low. An overvoltage can occur when the gate current is removed and the OUT current is lower than I_H .

As shown in [Figure 14](#) and [Figure 15](#), at the end of the last conduction half-cycle, the load current decreases (1). The load current reaches the holding current level I_H (2), and the ACS turns off (3). The water valve, as an inductive load (up to 15 H), reacts as a current generator and an overvoltage is created, which is clamped by the ACS (4). The current flows through the ACS avalanche and decreases linearly to zero. During this time, the voltage across the switch is limited to the clamping voltage V_{CL} . The energy stored in the inductance of the load is dissipated in the clamping section that is designed for this purpose. When the energy has been dissipated, the ACS voltage falls back to the mains voltage value (5).

Figure 14. Effect of the switching off of a high inductive load - typical clamping capability of ACS102-6T


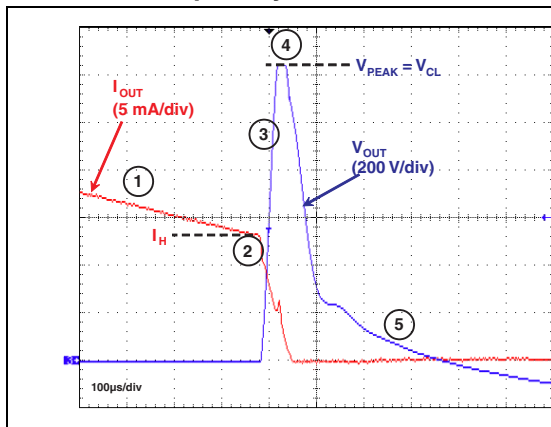


Figure 15. Description of the different steps during switching off of a high inductive load

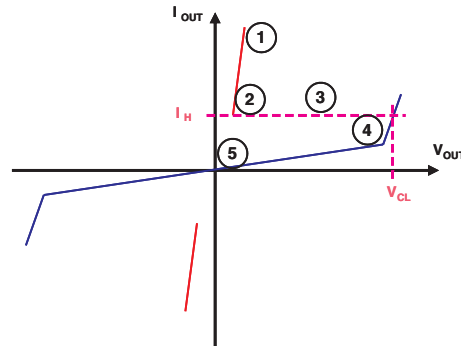

2.1.2 AC line transient voltage ruggedness

The ACS102-6T switch is able to withstand safely the AC line transients either by clamping the low energy spikes or by breaking over under high energy shocks, even with high turn-on current rises.

The test circuit shown in [Figure 16](#) is representative of the final ACS102-6T application, and is also used to test the ACS switch according to the IEC 61000-4-5 standard conditions. Thanks to the load limiting the current, the ACS102-6T switch withstands the voltage spikes up to 2 kV above the peak line voltage. The protection is based on an overvoltage crowbar technology. Actually, the ACS102-6T breaks over safely as shown in [Figure 17](#). The ACS102-6T recovers its blocking voltage capability after the surge (switch off back at the next zero crossing of the current).

Such non-repetitive tests can be done 10 times on each AC line voltage polarity.

Figure 16. Overvoltage ruggedness test circuit with conditions equivalent to IEC 61000-4-5 standards


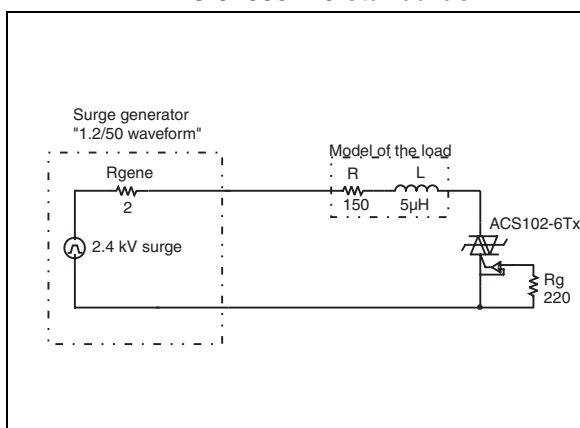


Figure 17. Typical current and voltage waveforms across the ACS102-6T during IEC 61000-4-5 standard test

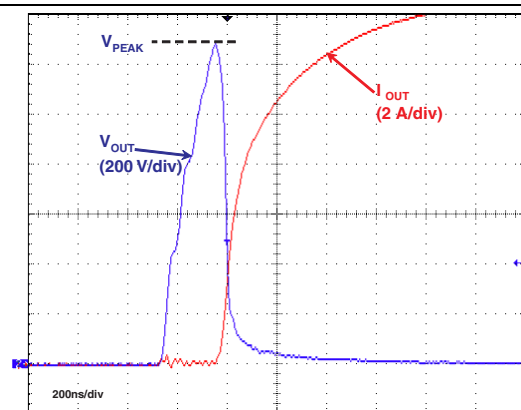

3 Ordering information scheme

| | | | | | | | | |
|---------------------------|-----|---|----|---|---|---|---|-----|
| | ACS | 1 | 02 | - | 6 | T | A | -TR |
| AC Switch series | | | | | | | | |
| Number of switches | | | | | | | | |
| Current | | | | | | | | |
| 02 = 0.2 A _{RMS} | | | | | | | | |
| Voltage | | | | | | | | |
| 6 = 600 V | | | | | | | | |
| Sensitivity | | | | | | | | |
| T = 5 mA | | | | | | | | |
| Package | | | | | | | | |
| A = TO-92 | | | | | | | | |
| 1 = SO-8 | | | | | | | | |
| Packing | | | | | | | | |
| TR = Tape and reel | | | | | | | | |
| Blank = (TO-92) Bulk | | | | | | | | |
| (SO-8) Tube | | | | | | | | |

4 Package information

Table 5. TO-92 Mechanical data


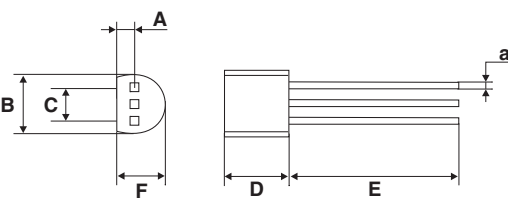
| | Ref | Dimensions | | | | | |
|---|-----|-------------|------|------|--------|-------|-------|
| | | Millimeters | | | Inches | | |
| | | Min. | Typ. | Max. | Min. | Typ. | Max. |
|  | A | | 1.35 | | | 0.053 | |
| | B | | | 4.70 | | | 0.185 |
| | C | | 2.54 | | | 0.100 | |
| | D | 4.40 | | | 0.173 | | |
| | E | 12.70 | | | 0.500 | | |
| | F | | | 3.70 | | | 0.146 |
| | a | | | 0.50 | | | 0.019 |

Table 6. SO-8 Mechanical data

| REF. | DIMENSIONS | | | | | |
|------|-------------|-------|-------|--------|-------|-------|
| | Millimetres | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 1.350 | | 1.75 | 0.053 | | 0.069 |
| A1 | 0.100 | | 0.250 | 0.004 | | 0.010 |
| A2 | 1.100 | | 1.650 | 0.043 | | 0.065 |
| B | 0.330 | | 0.510 | 0.013 | | 0.020 |
| C | 0.190 | | 0.250 | 0.008 | | 0.010 |
| D | 4.800 | | 5.000 | 0.189 | | 0.197 |
| E | 3.800 | | 4.000 | 0.150 | | 0.157 |
| e | | 1.270 | | | 0.050 | |
| H | 5.800 | | 6.200 | 0.228 | | 0.244 |
| h | 0.250 | | 0.500 | 0.010 | | 0.020 |
| L | 0.400 | | 1.270 | 0.016 | | 0.050 |
| k | 0° | | 8° | 0° | | 8° |
| ddd | | | 0.100 | | | 0.004 |

Figure 18. SO-8 Footprint

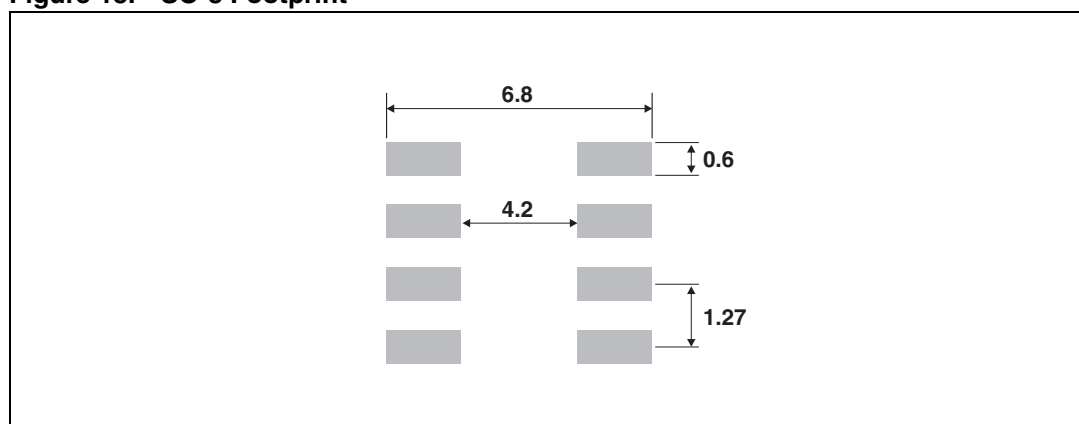

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

5 Ordering information

| Part number | Marking | Package | Weight | Base Qty | Packing mode |
|---------------|----------|---------|--------|----------|---------------|
| ACS102-6TA | ACS1026T | TO-92 | 0.2 g | 2500 | Bulk |
| ACS102-6TA-TR | ACS1026T | TO-92 | 0.2 g | 2000 | Tape and Reel |
| ACS102-6T1 | ACS1026T | SO-8 | 0.11 g | 100 | Tube |
| ACS102-6T1-TR | ACS1026T | SO-8 | 0.11 g | 2500 | Tape & reel |

6 Revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 05-Jan-2006 | 1 | Initial release. |
| 07-Jun-2006 | 2 | Reformatted to current standards. Replaced figure 9. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com





ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ