

DESC APPROVED LOW DROPOUT NEGATIVE



Three Terminal, Fixed Voltage,
Low Dropout Negative Voltage Regulator
In Hermetic Packages

FEATURES

- Approved To DESC Standardized Military Drawings
- Low Dropout Voltage, $0.6\text{ V @ } I_o = 1\text{ A}$
- Output Current in Excess of 1 A [LOC 20 (N2) package limited to 0.3A]
- Reverse Battery Protection
- Internal Short Circuit Protection
- Isolated and Non-Isolated Hermetic Package Types
- Output Voltages: - 5V, -5.2V, -12V, & -15V

13

DESCRIPTION

The OM2990 series of fixed voltage regulators are designed to provide up to 1.5A with high efficiency. It has the ability to source 1A of output current with a typical dropout voltage of 0.6V and a maximum of 1V over the entire operating temperature range. It is supplied in hermetic packages and is ideally suited for all applications where small size and high reliability are required.

ABSOLUTE MAXIMUM RATINGS, $T_C = 25^\circ\text{C}$

Input Voltage	-26 V to +0.3V
Output Voltage	-5V, -5.2 V, -12 V, -15 V dc
Operating Junction Temperature Range	- 55°C to + 125°C
Storage Temperature Range	- 65°C to + 150°C
Lead Temperature (Soldering 10 seconds)	300°C
Thermal Resistance: Junction to Case	
Case 2, LOC20	15.5°C/W
Case U&M, TO-257 (isolated) & SMD-3	3.8°C/W
Case T&N, TO-257 (non-isolated) & SMD-1	3.0°C/W
Case Y, TO-3	2.7°C/W
Maximum Output Current	
Case 2	0.3A
Case U&M	1.2A
Case T, N & Y	1.5A

APPROVED DESC DRAWING	OMNIREL P/N
5962-9571101MUA	OM2990 - 5 STM
5962-9571002MUA	OM2990 - 5.2 STM
5962-9571001MUA	OM2990 - 12 STM

13

Notes: 1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested

Test Conditions are -55°C T_A 125°C , $V_{BI} = -17\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

Notes:

1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short

Test Conditions are -55°C T_A 125°C , $V_N = -20\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

Notes:

1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

Test Conditions are -55°C T_A 125°C , $V_{BI} = -10\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

13

Test Conditions are -55°C T_A 125°C , $V_{BI} = -17\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

ELECTRICAL CHARACTERISTICS, 0M2990-15SM, ST (-15 VOLTS)

Test Conditions are -55°C T_A 125°C, $V_{IN} = -20V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).						
Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	5 mA $\leq I_O \leq 1.0$ A	1 2	-15.30 -15.75	-14.70 -14.25	V
Quiescent Current	I_Q	$I_O \leq 1.0$ A $I_O = 1.0$ A, $V_{IN} = -15$ V	1 2 1,2		15 20 50	m A
Line Regulation	V_{RLN}	-16 V V_{IN} -26 V, $I_{OUT} = 5$ mA	1 2		± 75 ± 120	m V
Load Regulation	V_{RLD}	50 mA I_{OUT} 1.0 A	1 2		± 120 ± 190	m V
Dropout Voltage	V_{DO}	$I_O = 0.1$ A $DV_O = 100$ mV $I_O = 1.0$ A $DV_O = 100$ mV	1 2 1 2		3 1	V
Output Noise Voltage	V_{ON}	$I_O = 5$ mA, 10 Hz - 100 kHz	3		1800	μV
Short Circuit Current	I_{OS}	$R_L = 1$	1 2 4	.60 50		A
Maximum Output Current	I_{MAX}		1 4	1.4		A
Ripple Rejection	R_R	$V_{ripple} = 1$ V _{rms} $I_{OUT} = 5$ mA, $f = 1$ kHz	1	42		dB

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990- 5N2 (-5 VOLTS)

Test Conditions are -55°C T_A 125°C , $V_{IN} = -10\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_O \leq 300\text{ mA}$	1	-5.10	-4.90	V
			2	-5.25	-4.75	
Quiescent Current	I_Q	$I_O \leq 300\text{ mA}$	1		7	m A
			2		14	
		$I_O = 300\text{ mA}$, $V_{IN} = -5\text{ V}$	1,2		55	
Line Regulation	V_{RLN}	-6 V V_{IN} -26 V , $I_{OUT} = 5\text{ mA}$	1		± 45	m V
			2		± 60	
Load Regulation	V_{RLD}	50 mA I_{OUT} 300 mA	1		± 80	m V
			2		± 120	
Dropout Voltage	V_{DO}	$I_O = 100\text{ mA}$	1		3	V
		$DV_{DO} = 100\text{ mV}$	2			
		$I_O = 300\text{ mA}$	1		1	
		$DV_{DO} = 100\text{ mV}$	2			
Output Noise Voltage	V_{ON}	$I_O = 5\text{ mA}$, $10\text{ Hz} - 100\text{ kHz}$	3		800	μV
Short Circuit Current	I_{OS}	$R_L = 1$	1	300		m A
			2	250		
Maximum Output Current	I_{MAX}		1	300		m A
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	50		dB

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-12N2 (-12 VOLTS)

Test Conditions are -55°C T_A 125°C , $V_{IN} = -17\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_O \leq 300\text{ mA}$	1	-12.24	-11.76	V
			2	-12.60	-11.40	
Quiescent Current	I_Q	$I_O \leq 300\text{ mA}$	1		7	m A
			2		14	
		$I_O = 300\text{ mA}$, $V_{IN} = -12\text{ V}$	1,2		60	
Line Regulation	V_{RLN}	-13 V V_{IN} -26 V , $I_{OUT} = 5\text{ mA}$	1		± 75	m V
			2		± 110	
Load Regulation	V_{RLD}	50 mA I_{OUT} 300 mA	1		± 120	m V
			2		± 190	
Dropout Voltage	V_{DO}	$I_O = 100\text{ mA}$	1		3	V
		$DV_{DO} = 100\text{ mV}$	2			
		$I_O = 300\text{ mA}$	1		1	
		$DV_{DO} = 100\text{ mV}$	2			
Output Noise Voltage	V_{ON}	$I_O = 5\text{ mA}$, $10\text{ Hz} - 100\text{ kHz}$	3		1650	μV
Short Circuit Current	I_{OS}	$R_L = 1$	1	200		m A
			2	175		
Maximum Output Current	I_{MAX}		1	280		m A
			4			
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	42		dB

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-15 N2 (-15 VOLTS)

Test Conditions are -55°C T_A 125°C , $V_{IN} = -20\text{V}$, $C_{OUT} = 47\text{ }\mu\text{F}$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_O \leq 300\text{ mA}$	1	-15.30	-14.70	V
			2	-15.75	-14.25	
Quiescent Current	I_Q	$I_O \leq 300\text{ mA}$	1		20	m A
			2		25	
		$I_O = 300\text{ mA}$, $V_{IN} = -15\text{ V}$	1,2		60	
Line Regulation	V_{RLN}	-16 V V_{IN} -26 V , $I_{OUT} = 5\text{ mA}$	1		± 85	m V
			2		± 130	
Load Regulation	V_{RLD}	50 mA I_{OUT} 300 mA	1		± 135	m V
			2		± 205	
Dropout Voltage	V_{DO}	$I_O = 100\text{ mA}$	1		3	V
		$DV_{DO} = 100\text{ mV}$	2			
		$I_O = 300\text{ mA}$	1		1	
		$DV_{DO} = 100\text{ mV}$	2			
Output Noise Voltage	V_{ON}	$I_O = 5\text{ mA}$, $10\text{ Hz} - 100\text{ kHz}$	3		1900	μV
Short Circuit Current	I_{OS}	$R_L = 1$	1	150		m A
			2	140		
Maximum Output Current	I_{MAX}		1	280		m A
			4			
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	42		dB

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5.2NK, NM, NT (-5.2 VOLTS)

Test Conditions are -55°C, T_A 125°C, $V_{IN} = -10.2V$, $C_{OUT} = 47\mu F$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_L \leq 1.0\text{ A}$	1 2	-5.30 -5.46	-5.10 -4.94	V
Quiescent Current	I_Q	$I_Q \leq 1.0\text{ A}$	1 2		5 12	mA
		$I_Q = 1.0\text{ A}$, $V_{IN} = -5.2\text{ V}$	1,2		50	
Line Regulation	V_{RLN}	-6.2 V $V_{IN} = -26\text{ V}$, $I_{OUT} = 5\text{ mA}$	1 2		± 40 ± 50	mV
Load Regulation	V_{RLD}	50 mA $I_{OUT} = 1.0\text{ A}$	1 2		± 50 ± 100	mV
Dropout Voltage	V_{DO}	$I_Q = 0.1\text{ A}$	1			V
		$DV_{DO} = 100\text{ mV}$	2		3	
		$I_Q = 1.0\text{ A}$	1			
		$DV_{DO} = 100\text{ mV}$	2		1	
Output Noise Voltage	V_{ON}	$I_Q = 5\text{ mA}$, 10 Hz - 100 kHz	3		750	μV
Short Circuit Current	I_{SC}	$R_L = 1$	1 2	1.5 1.3		A
Maximum Output Current	I_{MAX}		1	1.5		A
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{ms}$, $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	50		dB

Notes: 1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2SM, ST (-5.2 VOLTS)

Test Conditions are -55°C, T_A 125°C, $V_{IN} = -10.2V$, $C_{OUT} = 47\mu F$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_L \leq 1.0\text{ A}$	1 2	-5.30 -5.46	-5.10 -4.94	V
Quiescent Current	I_Q	$I_Q \leq 1.0\text{ A}$	1 2		5 12	mA
		$I_Q = 1.0\text{ A}$, $V_{IN} = -5.2\text{ V}$	1,2		50	
Line Regulation	V_{RLN}	-6.2 V $V_{IN} = -26\text{ V}$, $I_{OUT} = 5\text{ mA}$	1 2		± 45 ± 55	mV
Load Regulation	V_{RLD}	50 mA $I_{OUT} = 1.0\text{ A}$	1 2		± 70 ± 110	mV
Dropout Voltage	V_{DO}	$I_Q = 0.1\text{ A}$	1			V
		$DV_{DO} = 100\text{ mV}$	2		3	
		$I_Q = 1.0\text{ A}$	1			
		$DV_{DO} = 100\text{ mV}$	2		1	
Output Noise Voltage	V_{ON}	$I_Q = 5\text{ mA}$, 10 Hz - 100 kHz	3		750	μV
Short Circuit Current	I_{SC}	$R_L = 1$	1,2	1.27		A
Maximum Output Current	I_{MAX}		1	1.27		A
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{ms}$, $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	50		dB


Notes: 1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2N2 (-5.2 VOLTS)

Test Conditions are -55°C, T_A 125°C, $V_{IN} = -10.2V$, $C_{OUT} = 47\mu F$ (unless otherwise specified).

Parameter	Symbol	Test Conditions	Notes	Min.	Max.	Unit
Output Voltage	V_{OUT}	$5\text{ mA} \leq I_L \leq 300\text{ mA}$	1 2	-5.30 -5.46	-5.10 -4.94	V
Quiescent Current	I_Q	$I_Q \leq 300\text{ mA}$	1 2		7 14	mA
		$I_Q = 300\text{ mA}$, $V_{IN} = -5.2\text{ V}$	1,2		55	
Line Regulation	V_{RLN}	-6.2 V $V_{IN} = -26\text{ V}$, $I_{OUT} = 5\text{ mA}$	1 2		± 45 ± 60	mV
Load Regulation	V_{RLD}	50 mA $I_{OUT} = 300\text{ mA}$	1 2		± 80 ± 120	mV
Dropout Voltage	V_{DO}	$I_Q = 100\text{ mA}$	1			V
		$DV_{DO} = 100\text{ mV}$	2		3	
		$I_Q = 300\text{ mA}$	1			
		$DV_{DO} = 100\text{ mV}$	2		1	
Output Noise Voltage	V_{ON}	$I_Q = 5\text{ mA}$, 10 Hz - 100 kHz	3		800	μV
Short Circuit Current	I_{SC}	$R_L = 1$	1 2	300 250		mA
Maximum Output Current	I_{MAX}		1	300		mA
Ripple Rejection	R_R	$V_{ripple} = 1\text{ V}_{ms}$, $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$	1	50		dB


Notes: 1. $T_A = 25^\circ\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

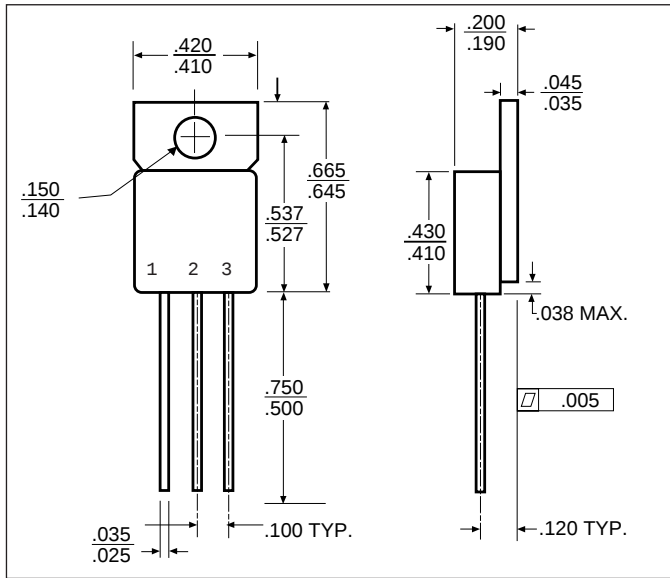

T0-257AA

OM2990STM
Isolated
Front View
Pin 1 - Ground
Pin 2 - Input
Pin 3 - Output
Tab - Isolated


OM2990NTM
Non-Isolated
Front View
Pin 1 - Ground
Pin 2 - Input
Pin 3 - Output
Tab - Input

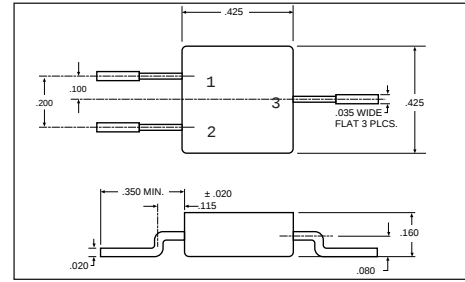

SMD-3


OM2990SMM

Front View
Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input
Case - Isolated

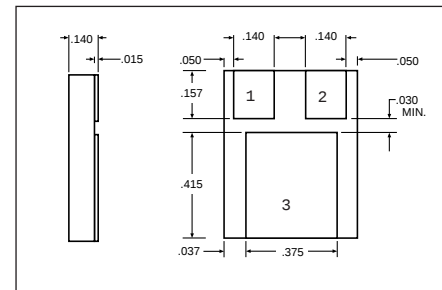SMD 1
"N" PACKAGE


OM2990NMM

Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input

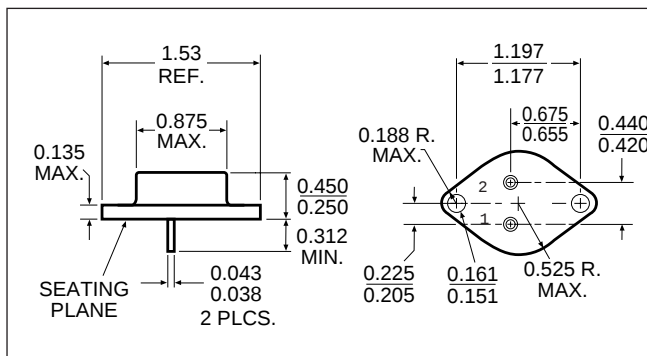

T0-204AA (T0-3)

OM2990NKM
Pin 1 - Ground
Pin 2 - Output

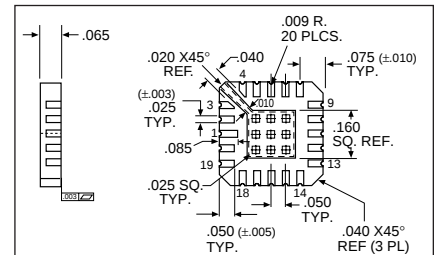

LCC 20

OM2990N2M

Pin 1	NC	Pin 11	V _{OUT}
Pin 2	NC	Pin 12	V _{OUT}
Pin 3	NC	Pin 13	NC
Pin 4	NC	Pin 14	NC
Pin 5	NC	Pin 15	V _{IN}
Pin 6	Ground	Pin 16	V _{IN}
Pin 7	NC	Pin 17	V _{IN}
Pin 8	NC	Pin 18	NC
Pin 9	V _{OUT} (Sense)	Pin 19	NC



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ