

Description


The PowerStor Aerogel Capacitor is a unique, ultra-high capacitance device based on a novel type of carbon foam, known as carbon aerogel. Aerogel capacitors are similar to supercapacitors, ultracapacitors and electrochemical double layer capacitors (EDLCs) with the added benefit of low ESR (Equivalent Series Resistance).

Features & Benefits

- High specific capacitance
- Very low ESR
- Low leakage currents
- Long cycle life
- Ultra low ESR also available (A Series)

Applications

- Main power
- Hybrid battery packs
- Hold-up power
- Pulse power

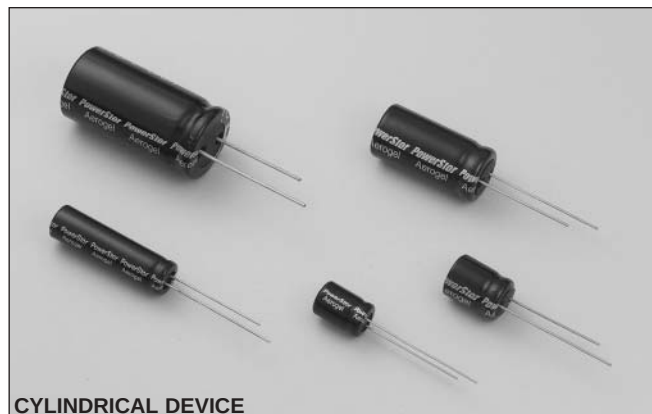

SPECIFICATIONS

Working Voltage	2.5 volts
Surge Voltage	3.0 volts
Nominal Capacitance Range	0.22 to 50 F
Capacitance Tolerance	-20% to +80% (20°C)
Operating Temperature Range	-25°C to 70°C

STANDARD PRODUCTS


Nominal Capacitance (F)	Part Number	Nominal ESR (Equivalent Series Resistance) Measured @ 1kHz (Ω)	Nominal Dimensions
0.22	B0510-2R5224	3	Ø = 5 mm; L = 11 mm
1.0	B0810-2R5105	0.400	Ø = 8 mm; L = 13 mm
1.5	B1010-2R5155	0.300	Ø = 10 mm; L = 12.5 mm
2.2	B0820-2R5225	0.200	Ø = 8 mm; L = 20 mm
3.3	B1020-2R5335	0.150	Ø = 10 mm; L = 20.5 mm
4.7	B0830-2R5475	0.150	Ø = 8 mm; L = 30 mm
6.8	B1030-2R5685	0.100	Ø = 10 mm; L = 30 mm
10	B1325-2R5106	0.060	Ø = 13 mm; L = 26 mm
22	B1635-2R5226	0.040	Ø = 16 mm; L = 35 mm
33	B1835-2R5336	0.030	Ø = 18 mm; L = 35 mm
50	B1840-2R5506	0.025	Ø = 18 mm; L = 40 mm

PERFORMANCE

Parameter	Capacitance Change (% of initial measured value)	ESR (% of initial specified value)
Life (1000 hrs @ 70°C @ 2.5 volts DC)	≤ 30	≤ 300
Storage - low and high temperature (1000 hrs @ -25°C and 70°C)	≤ 30	≤ 300

DIMENSIONS (mm)								
Part Number	D	D'	L	L'	F	d'	C	C'
B0510-2R5224	5.0	5.5	11.5	12.0	2.0	0.50	20.0	5.0
B0810-2R5105	8.0	8.5	13.0	13.5	3.5	0.50	20.0	5.0
B1010-2R5155	10.0	10.5	13.9	14.4	5.0	0.60	20.0	5.0
B0820-2R5225	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
B1020-2R5335	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
B0830-2R5475	8.0	8.5	30.5	31.0	3.5	0.50	20.0	5.0
B1030-2R5685	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
B1325-2R5106	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
B1635-2R5226	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
B1835-2R5336	18.0	18.5	37.5	38.0	7.5	0.80	20.0	5.0
B1840-2R5506	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
Maximum					± 0.5	± 0.02	Minimum	

Note: Longer lead is positive

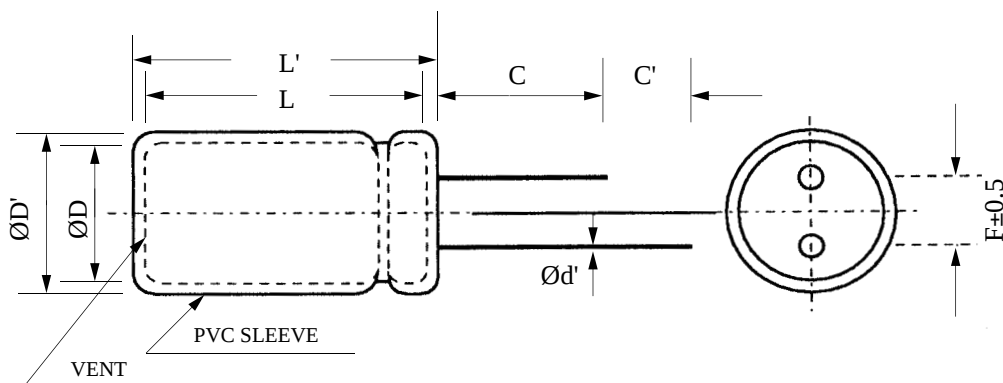

PART NUMBERING SYSTEM											
B	□	□	□	□	-	2	R	5	□	□	□
Series Code	Dimensions (mm)					Voltage (V) R is decimal			Capacitance		
B = High Capacitance	Diameter		Length			2R5 = 2.5V			Value	Multiplier	
									Example: 475 = 47 x 10 ⁵ μ F or 4.7 F		

PACKAGING INFORMATION

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

PART MARKING

Manufacturer
Capacitance (F)
Max. Operating Voltage (V)
Series Code (or part number)
Polarity Marking



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ