

## Fast Recovery Diodes (Stud Version), 40 A, 70 A, 85 A



DO-203AB (DO-5)

### FEATURES

- Short reverse recovery time
- Low stored charge
- Wide current range
- Excellent surge capabilities
- Stud cathode and stud anode versions
- Types up to 100 V<sub>RRM</sub>
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

- DC power supplies
- Inverters
- Converters
- Choppers
- Ultrasonic systems
- Freewheeling diodes

### PRODUCT SUMMARY

|                       |                  |
|-----------------------|------------------|
| $I_{F(AV)}$           | 40 A, 70 A, 85 A |
| Package               | DO-203AB (DO-5)  |
| Circuit configuration | Single diode     |

### MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER     | TEST CONDITIONS | 40HFL                              | 70HFL                              | 85HFL                              | UNITS             |
|---------------|-----------------|------------------------------------|------------------------------------|------------------------------------|-------------------|
| $I_{F(AV)}$   |                 | 40                                 | 70                                 | 85                                 | A                 |
|               | $T_C$ maximum   | 85                                 | 85                                 | 85                                 | °C                |
| $I_{FSM}$     | 50 Hz           | 400                                | 700                                | 1100                               | A                 |
|               | 60 Hz           | 420                                | 730                                | 1151                               |                   |
| $I^2t$        | 50 Hz           | 800                                | 2450                               | 6050                               | A <sup>2</sup> s  |
|               | 60 Hz           | 730                                | 2240                               | 5523                               |                   |
| $I^2\sqrt{t}$ |                 | 11 300                             | 34 650                             | 85 560                             | I <sup>2</sup> √s |
| $V_{RRM}$     | Range           | 100 to 1000                        | 100 to 1000                        | 100 to 1000                        | V                 |
| $t_{rr}$      |                 | See Recovery Characteristics table | See Recovery Characteristics table | See Recovery Characteristics table | ns                |
| $T_J$         | Range           | -40 to 125                         | -40 to 125                         | -40 to 125                         | °C                |



## ELECTRICAL SPECIFICATIONS

| VOLTAGE RATINGS              |                                                                                                                                |                                                                                                                                   |                                                                  |                                     |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|-------------------------------------|
| TYPE NUMBER <sup>(1)</sup>   | $V_{RRM}$ , MAXIMUM PEAK REPETITIVE REVERSE VOLTAGE<br>$T_J = -40\text{ }^{\circ}\text{C TO }125\text{ }^{\circ}\text{C}$<br>V | $V_{RSM}$ , MAXIMUM PEAK NON-REPETITIVE REVERSE VOLTAGE<br>$T_J = 25\text{ }^{\circ}\text{C TO }125\text{ }^{\circ}\text{C}$<br>V | $I_{FM}$ , MAXIMUM PEAK REVERSE CURRENT AT RATED $V_{RRM}$<br>mA |                                     |
|                              |                                                                                                                                |                                                                                                                                   | $T_J = 25\text{ }^{\circ}\text{C}$                               | $T_J = 125\text{ }^{\circ}\text{C}$ |
| VS-40HFL10S02, VS-40HFL10S05 | 100                                                                                                                            | 150                                                                                                                               | 0.1                                                              | 10                                  |
| VS-40HFL20S02, VS-40HFL20S05 | 200                                                                                                                            | 300                                                                                                                               |                                                                  |                                     |
| VS-40HFL40S02, VS-40HFL40S05 | 400                                                                                                                            | 500                                                                                                                               |                                                                  |                                     |
| VS-40HFL60S02, VS-40HFL60S05 | 600                                                                                                                            | 700                                                                                                                               |                                                                  |                                     |
| VS-40HFL80S05                | 800                                                                                                                            | 900                                                                                                                               |                                                                  |                                     |
| VS-40HFL100S05               | 1000                                                                                                                           | 1100                                                                                                                              |                                                                  |                                     |
| VS-70HFL10S02, VS-70HFL10S05 | 100                                                                                                                            | 150                                                                                                                               | 0.1                                                              | 15                                  |
| VS-70HFL20S02, VS-70HFL20S05 | 200                                                                                                                            | 300                                                                                                                               |                                                                  |                                     |
| VS-70HFL40S02, VS-70HFL40S05 | 400                                                                                                                            | 500                                                                                                                               |                                                                  |                                     |
| VS-70HFL60S02, VS-70HFL60S05 | 600                                                                                                                            | 700                                                                                                                               |                                                                  |                                     |
| VS-70HFL80S05                | 800                                                                                                                            | 900                                                                                                                               |                                                                  |                                     |
| VS-70HFL100S05               | 1000                                                                                                                           | 1100                                                                                                                              |                                                                  |                                     |
| VS-85HFL10S02, VS-85HFL10S05 | 100                                                                                                                            | 150                                                                                                                               | 0.1                                                              | 20                                  |
| VS-85HFL20S02, VS-85HFL20S05 | 200                                                                                                                            | 300                                                                                                                               |                                                                  |                                     |
| VS-85HFL40S02, VS-85HFL40S05 | 400                                                                                                                            | 500                                                                                                                               |                                                                  |                                     |
| VS-85HFL60S02, VS-85HFL60S05 | 600                                                                                                                            | 700                                                                                                                               |                                                                  |                                     |
| VS-85HFL80S05                | 800                                                                                                                            | 900                                                                                                                               |                                                                  |                                     |
| VS-85HFL100S05               | 1000                                                                                                                           | 1100                                                                                                                              |                                                                  |                                     |

## Note

<sup>(1)</sup> Types listed are cathode case, for anode case add "R" to code, i.e. 40HFLR20S02, 85HFLR100S05 etc.

| FORWARD CONDUCTION                                          |               |                                                                      |        |        |        |                   |
|-------------------------------------------------------------|---------------|----------------------------------------------------------------------|--------|--------|--------|-------------------|
| PARAMETER                                                   | SYMBOL        | TEST CONDITIONS                                                      | 40HFL  | 70HFL  | 85HFL  | UNITS             |
| Maximum average forward current at maximum case temperature | $I_{F(AV)}$   | 180° conduction, half sine wave                                      | 40     | 70     | 85     | A                 |
|                                                             |               |                                                                      | 75     |        |        | °C                |
| Maximum RMS forward current                                 | $I_{F(RMS)}$  |                                                                      | 63     | 110    | 134    | A                 |
| Maximum peak repetitive forward current                     | $I_{FRM}$     | Sinusoidal half wave, 30° conduction                                 | 220    | 380    | 470    | A                 |
| Maximum peak, one-cycle non-repetitive forward current      | $I_{FSM}$     | t = 10 ms                                                            | 400    | 700    | 1100   | A                 |
|                                                             |               | t = 8.3 ms                                                           | 420    | 730    | 1151   |                   |
|                                                             |               | t = 10 ms                                                            | 475    | 830    | 1308   |                   |
|                                                             |               | t = 8.3 ms                                                           | 500    | 870    | 1369   |                   |
| Maximum $I^2t$ for fusing                                   | $I^2t$        | t = 10 ms                                                            | 800    | 2450   | 6050   | A <sup>2</sup> s  |
|                                                             |               | t = 8.3 ms                                                           | 730    | 2240   | 5523   |                   |
|                                                             |               | t = 10 ms                                                            | 1130   | 3460   | 8556   |                   |
|                                                             |               | t = 8.3 ms                                                           | 1030   | 3160   | 7810   |                   |
| Maximum $I^2\sqrt{t}$ for fusing <sup>(1)</sup>             | $I^2\sqrt{t}$ | t = 0.1 ms to 10 ms, no voltage reapplied                            | 11 300 | 34 650 | 85 560 | A <sup>2</sup> √s |
| Maximum value of threshold voltage                          | $V_{F(TO)}$   | $T_J = 125\text{ }^{\circ}\text{C}$                                  | 1.081  | 1.085  | 1.128  | V                 |
| Maximum value of forward slope resistance                   | $r_F$         |                                                                      | 6.33   | 3.40   | 2.11   | mΩ                |
| Maximum forward voltage drop                                | $V_{FM}$      | $T_J = 25\text{ }^{\circ}\text{C}$ , $I_{FM} = \pi \times I_{F(AV)}$ | 1.95   | 1.85   | 1.75   | V                 |

## Note

<sup>(1)</sup>  $I^2t$  for time  $t_x = I^2\sqrt{t} \times \sqrt{t_x}$

**RECOVERY CHARACTERISTICS**


| PARAMETER                        | SYMBOL   | TEST CONDITIONS                                                                                                           | 40HFL... |      | 70HFL... |      | 85HFL... |      | UNITS |
|----------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------|----------|------|----------|------|----------|------|-------|
|                                  |          |                                                                                                                           | S02      | S05  | S02      | S05  | S02      | S05  |       |
| Typical reverse recovery time    | $t_{rr}$ | $T_J = 25\text{ }^{\circ}\text{C}$ , $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$ , $di_F/dt = 100\text{ A}/\mu\text{s}$     | 70       | 180  | 60       | 150  | 50       | 120  | ns    |
|                                  |          | $T_J = 25\text{ }^{\circ}\text{C}$ , $-di_F/dt = 25\text{ A}/\mu\text{s}$ , $I_{FM} = \pi \times \text{rated } I_{F(AV)}$ | 200      | 500  | 200      | 500  | 200      | 500  |       |
| Typical reverse recovered charge | $Q_{rr}$ | $T_J = 25\text{ }^{\circ}\text{C}$ , $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$ , $di_F/dt = 100\text{ A}/\mu\text{s}$     | 160      | 750  | 90       | 500  | 70       | 340  | nC    |
|                                  |          | $T_J = 25\text{ }^{\circ}\text{C}$ , $-di_F/dt = 25\text{ A}/\mu\text{s}$ , $I_{FM} = \pi \times \text{rated } I_{F(AV)}$ | 240      | 1300 | 240      | 1300 | 240      | 1300 |       |

**THERMAL AND MECHANICAL SPECIFICATIONS**

| PARAMETER                                            | SYMBOL            | TEST CONDITIONS                                             | 40HFL           | 70HFL | 85HFL | UNITS               |
|------------------------------------------------------|-------------------|-------------------------------------------------------------|-----------------|-------|-------|---------------------|
| Junction operating temperature range                 | T <sub>J</sub>    |                                                             | - 40 to 125     |       |       | °C                  |
| Storage temperature range                            | T <sub>Stg</sub>  |                                                             | - 40 to 150     |       |       |                     |
| Maximum thermal resistance, junction to case         | R <sub>thJC</sub> | DC operation                                                | 0.60            | 0.36  | 0.30  | K/W                 |
| Maximum thermal resistance, case to heatsink         | R <sub>thCS</sub> | Mounting surface, smooth, flat and greased                  | 0.25            |       |       |                     |
| Maximum allowable mounting torque<br>(+ 0 %, - 10 %) |                   | Not lubricated thread, tightening on nut <sup>(1)</sup>     | 3.4 (30)        |       |       | N · m<br>(lbf · in) |
|                                                      |                   | Lubricated thread, tightening on nut <sup>(1)</sup>         | 2.3 (20)        |       |       |                     |
|                                                      |                   | Not lubricated thread, tightening on hexagon <sup>(2)</sup> | 4.2 (37)        |       |       |                     |
|                                                      |                   | Lubricated thread, tightening on hexagon <sup>(2)</sup>     | 3.2 (28)        |       |       |                     |
| Approximate weight                                   |                   |                                                             | 25              |       |       |                     |
|                                                      |                   |                                                             | 0.88            |       |       |                     |
| Case style                                           |                   | JEDEC                                                       | DO-203AB (DO-5) |       |       |                     |

**Notes**

- (1) Recommended for pass-through holes  
(2) Recommended for holed threaded heatsinks

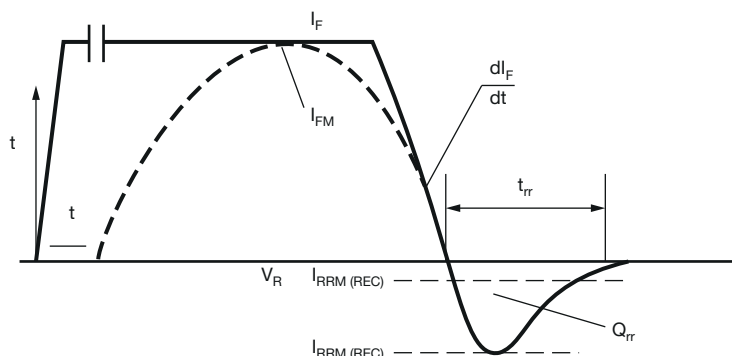

$I_F$ ,  $I_{FM}$  - Peak forward current prior to commutation  
 $-di_F/dt$  - Rate of fall forward current  
 $I_{RRM(REC)}$  - Peak reverse recovery current  
 $t_{rr}$  - Reverse recovery time  
 $Q_{rr}$  - Reverse recovered charge

Fig. 1 - Reverse Recovery Time Test Waveform

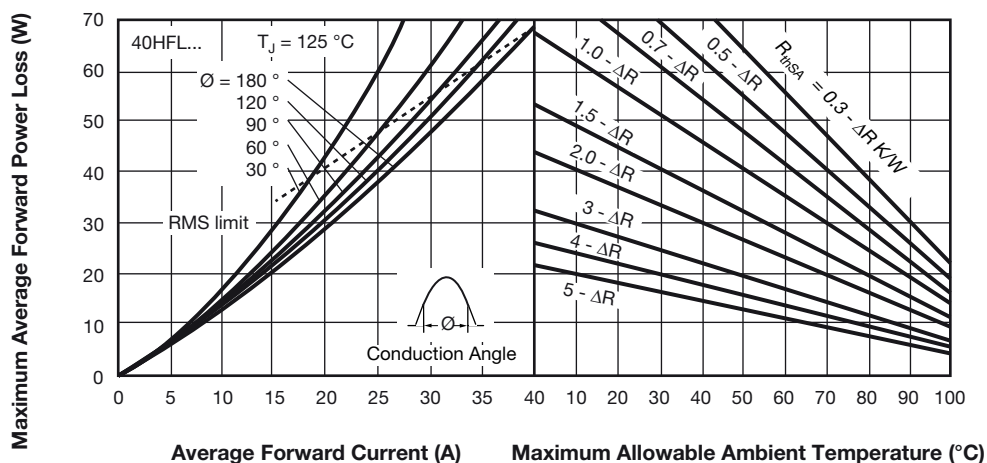


Fig. 2 - Current Rating Nomogram (Sinusoidal Waveforms), 40HFL Series

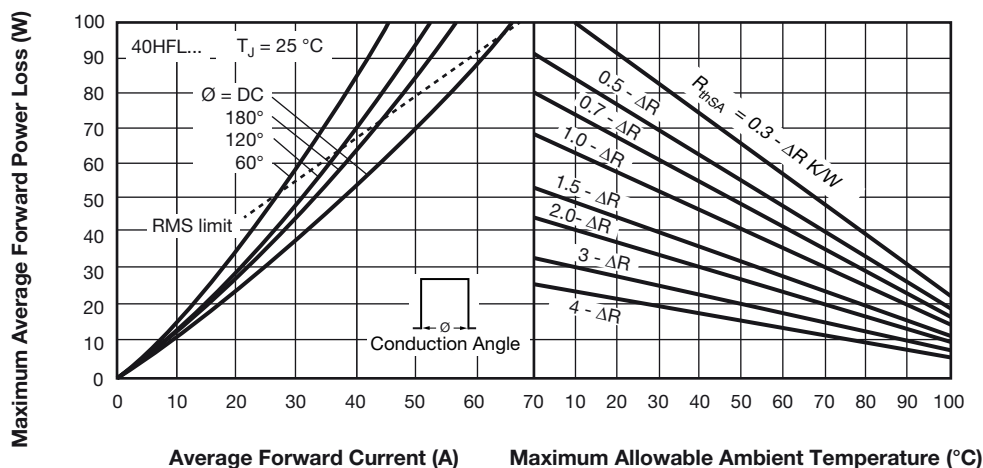


Fig. 3 - Current Rating Nomogram (Rectangular Waveforms), 40HFL Series

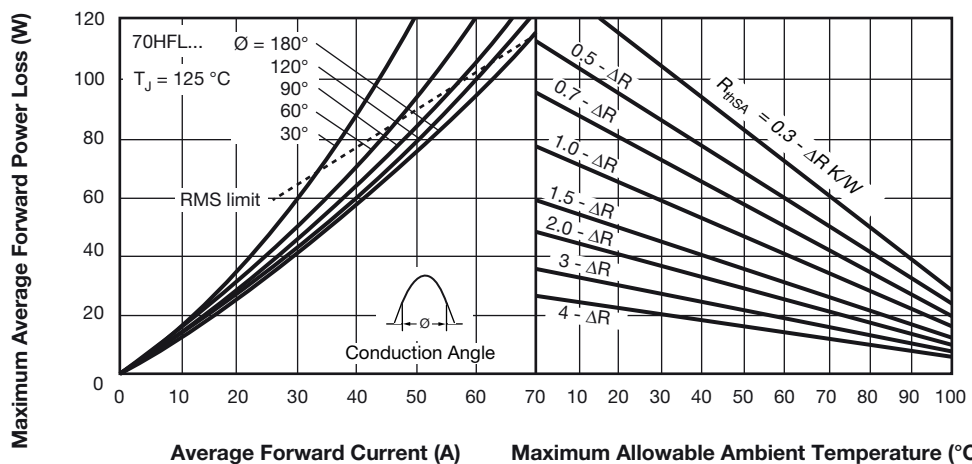


Fig. 4 - Current Rating Nomogram (Sinusoidal Waveforms), 70HFL Series

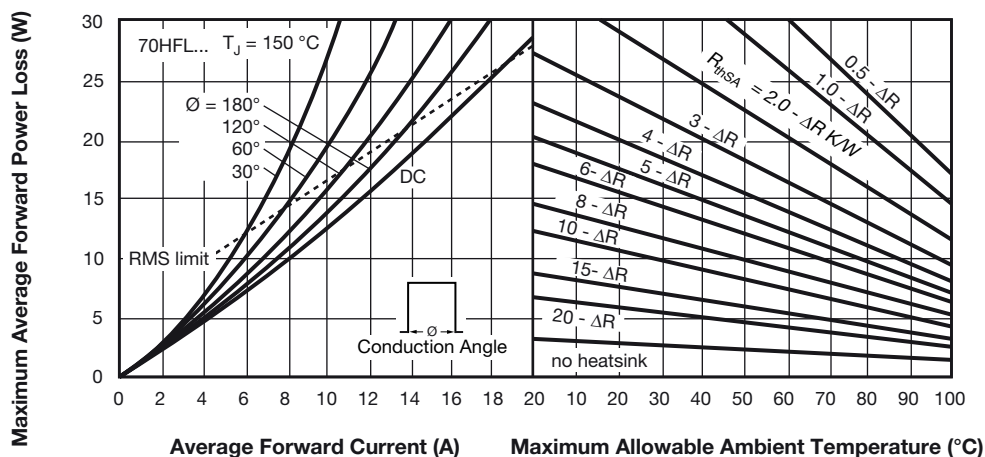


Fig. 5 - Current Rating Nomogram (Rectangular Waveforms), 70HFL Series

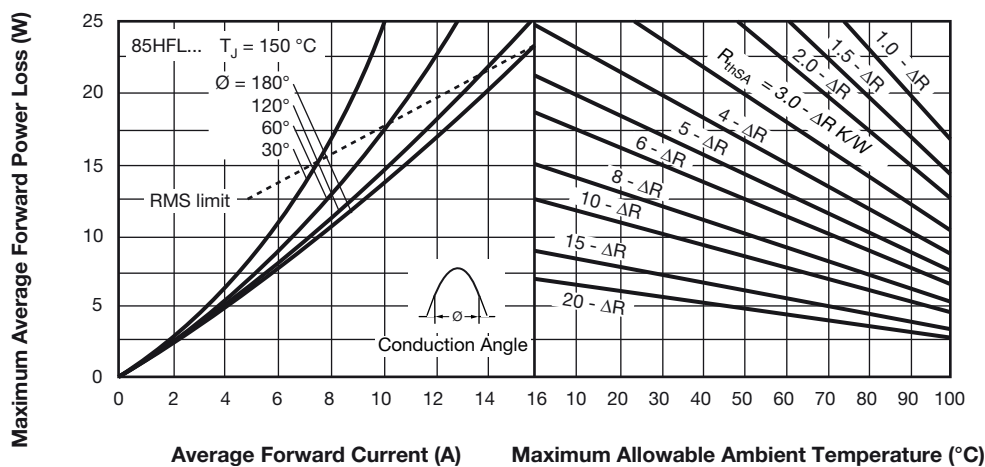


Fig. 6 - Current Rating Nomogram (Sinusoidal Waveforms), 85HFL Series

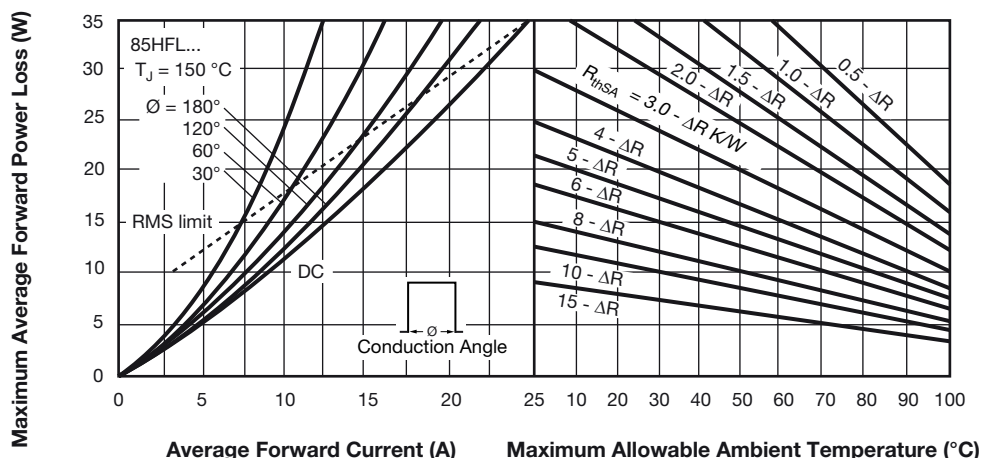


Fig. 7 - Current Rating Nomogram (Rectangular Waveforms), 85HFL Series

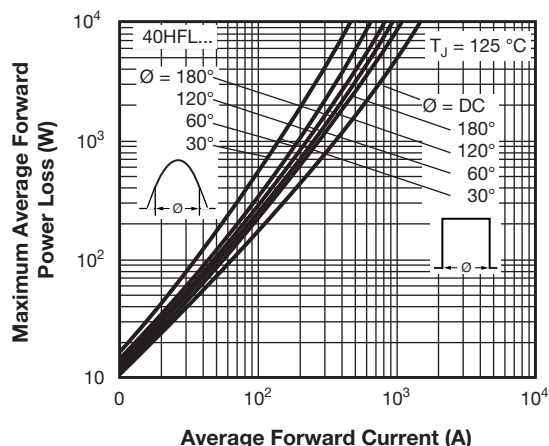


Fig. 8 - Maximum High Level Forward Power Loss vs. Average Forward Current, 40HFL Series

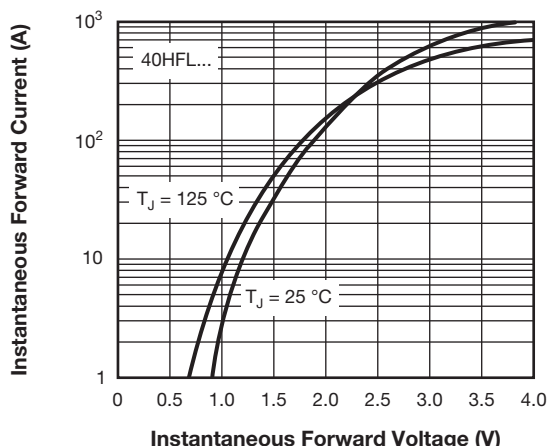


Fig. 11 - Maximum Forward Voltage vs. Forward Current, 40HFL Series

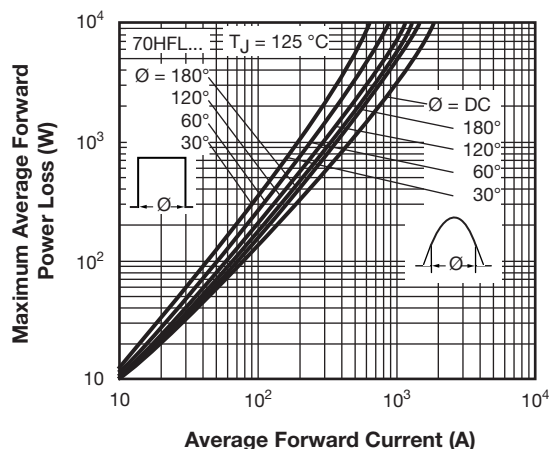


Fig. 9 - Maximum High Level Forward Power Loss vs. Average Forward Current, 70HFL Series

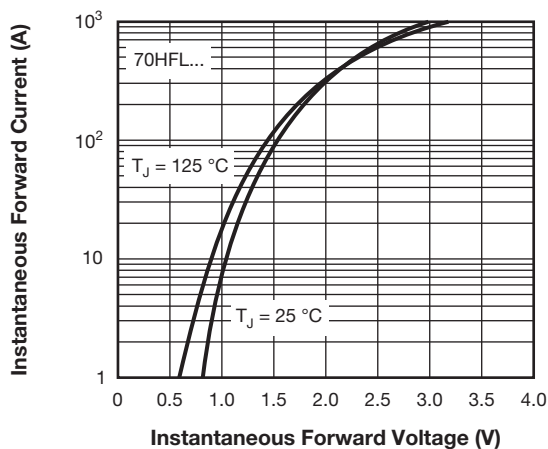


Fig. 12 - Maximum Forward Voltage vs. Forward Current, 70HFL Series

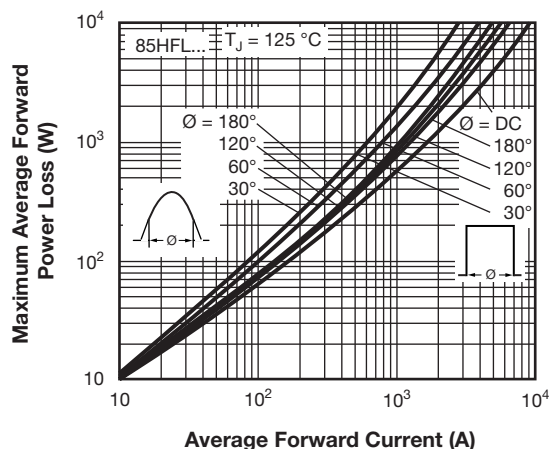


Fig. 10 - Maximum High Level Forward Power Loss vs. Average Forward Current, 85HFL Series

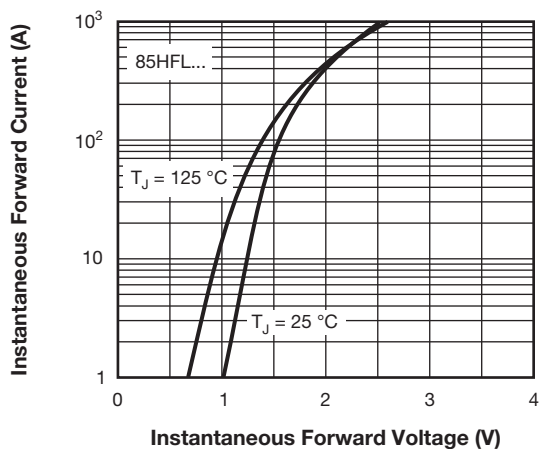


Fig. 13 - Maximum Forward Voltage vs. Forward Current, 85HFL Series

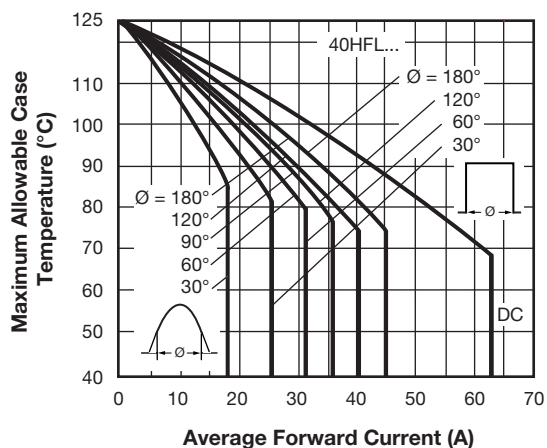


Fig. 14 - Average Forward Current vs. Maximum Allowable Case Temperature, 40HFL Series

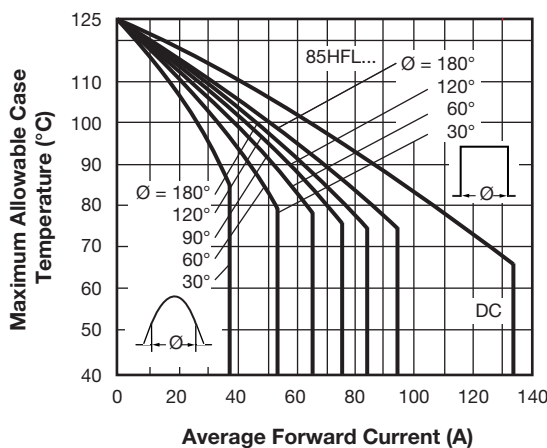


Fig. 16 - Average Forward Current vs. Maximum Allowable Case Temperature, 85HFL Series

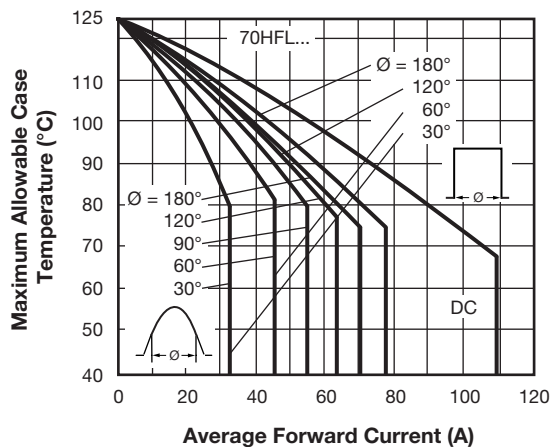


Fig. 15 - Average Forward Current vs. Maximum Allowable Case Temperature, 70HFL Series

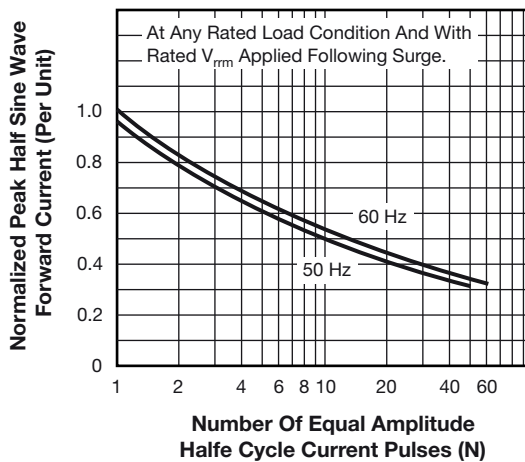


Fig. 17 - Maximum Non-Repetitive Surge Current vs. Number of Current Pulses, All Series

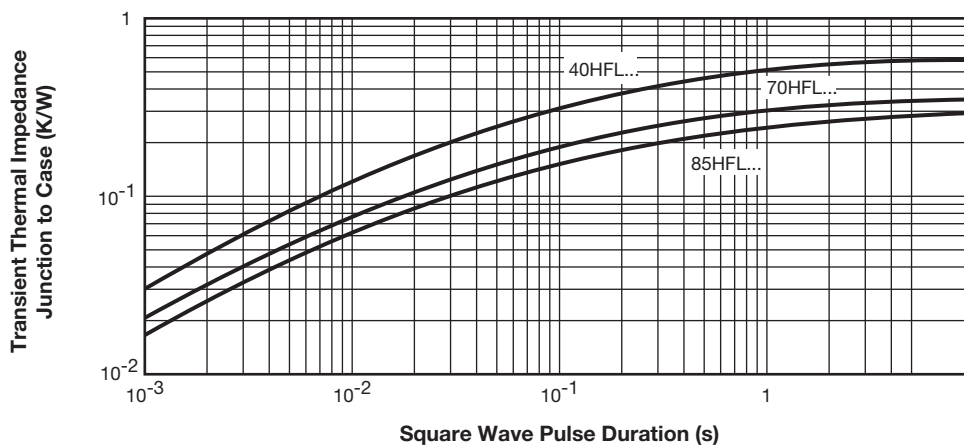


Fig. 18 - Maximum Transient Thermal Impedance, Junction to Case vs. Pulse Duration, All Series



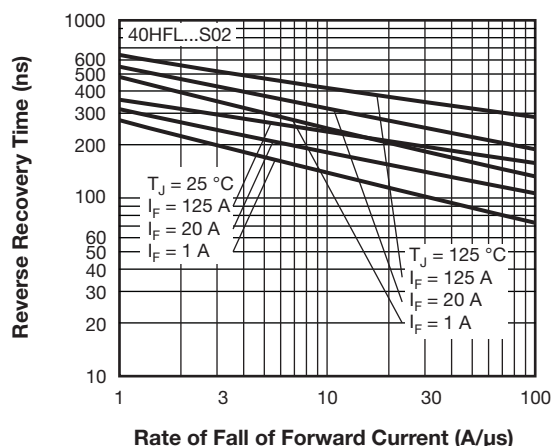


Fig. 19 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 40HFL...S02 Series

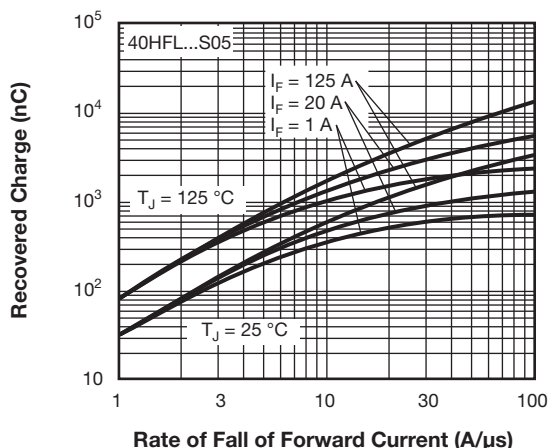


Fig. 22 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 40HFL...S05 Series

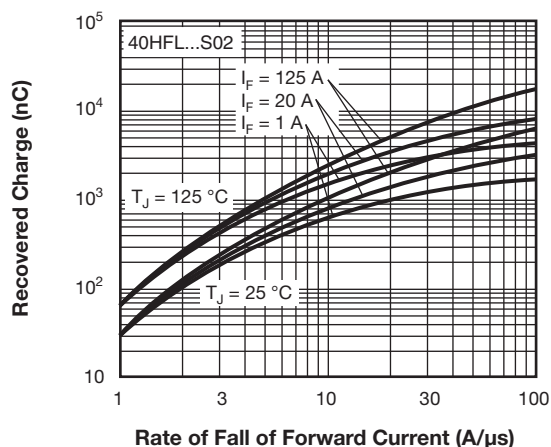


Fig. 20 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 40HFL...S02 Series

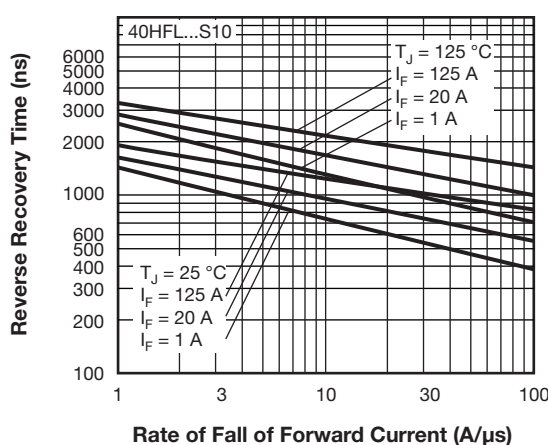


Fig. 23 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 40HFL...Series

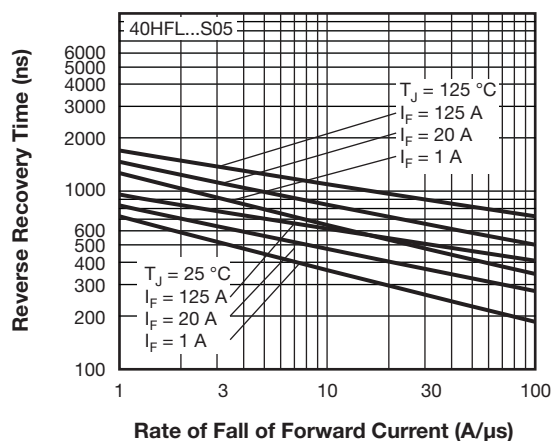


Fig. 21 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 40HFL...S05 Series

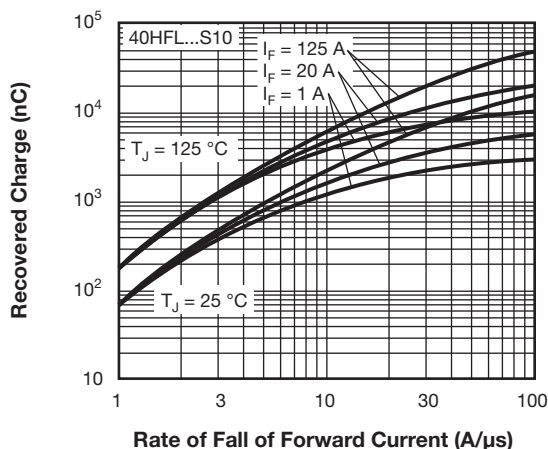


Fig. 24 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 40HFL...Series



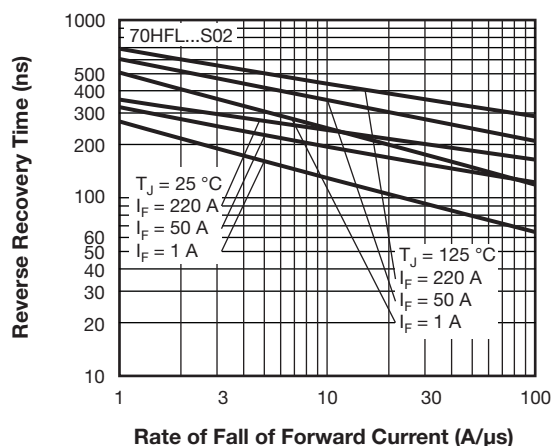


Fig. 25 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 70HFL...S02 Series

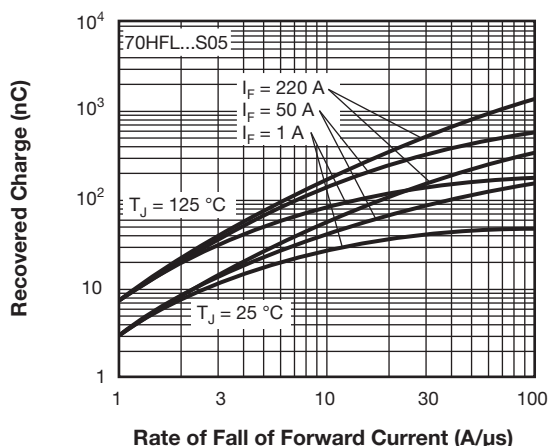


Fig. 28 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 70HFL...S05 Series

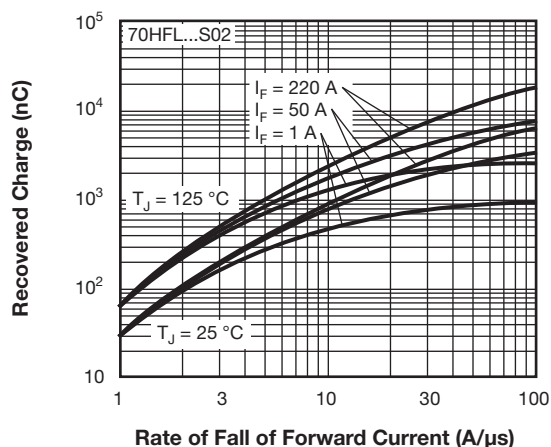


Fig. 26 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 70HFL...S02 Series

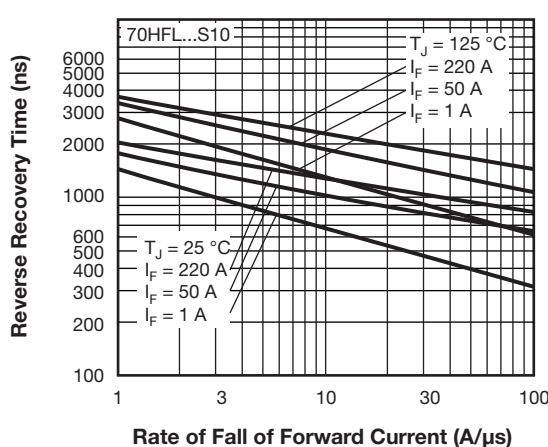


Fig. 29 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 70HFL... Series

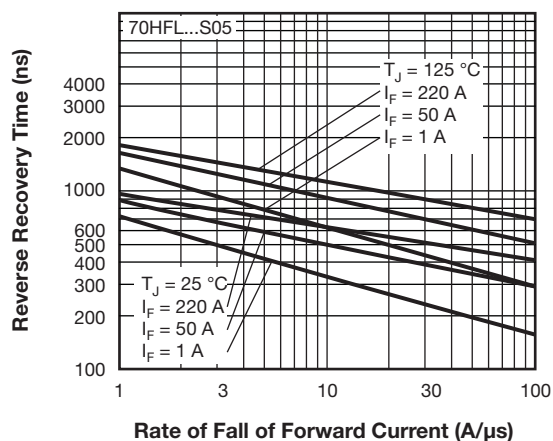


Fig. 27 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 70HFL...S05 Series



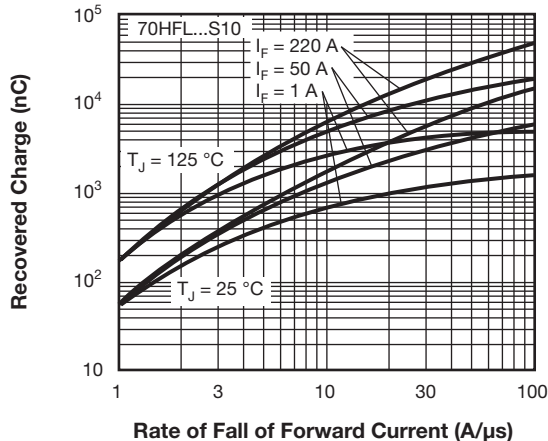



Fig. 30 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 70HFL... Series

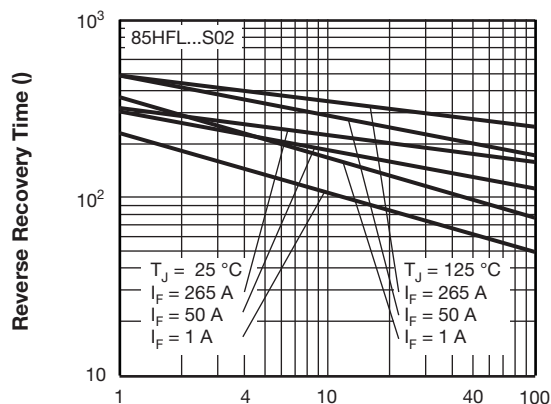


Rate of Fall of Forward Current (A/μs)  
Fig. 31 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S02 Series

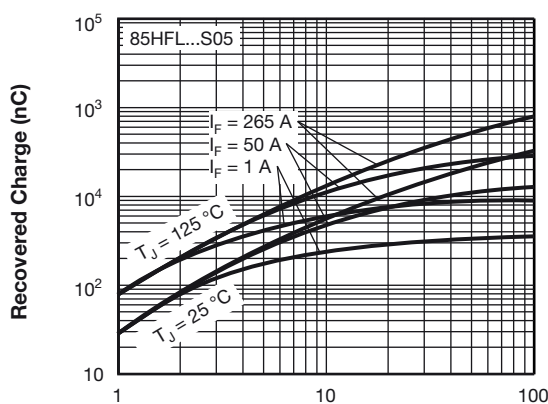


Rate of Fall of Forward Current (A/μs)  
Fig. 34 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S05 Series

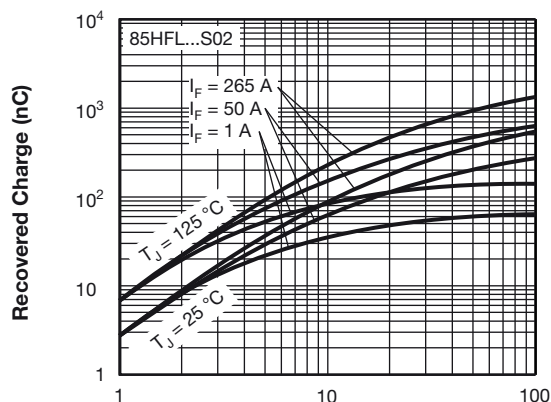


Rate of Fall of Forward Current (A/μs)  
Fig. 32 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S02 Series

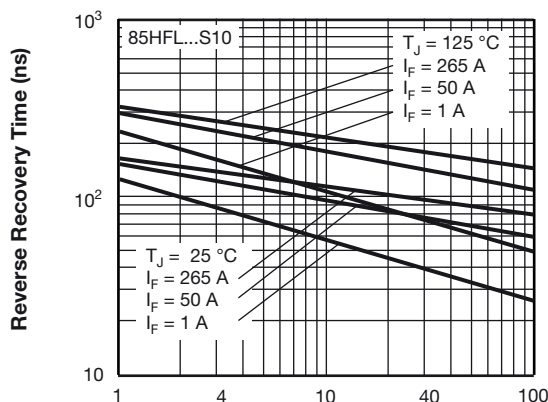

Rate of Fall of Forward Current (A/μs)  
Fig. 35 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S10 Series

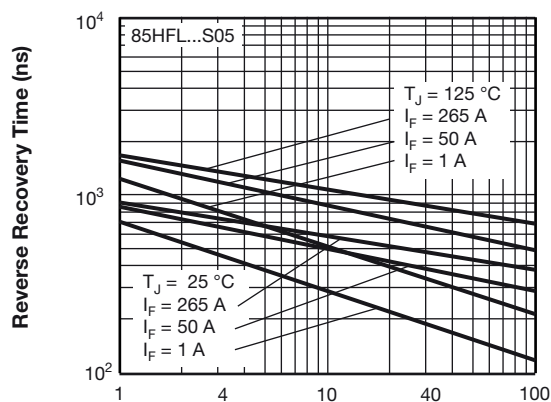

Rate of Fall of Forward Current (A/μs)  
Fig. 33 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S05 Series

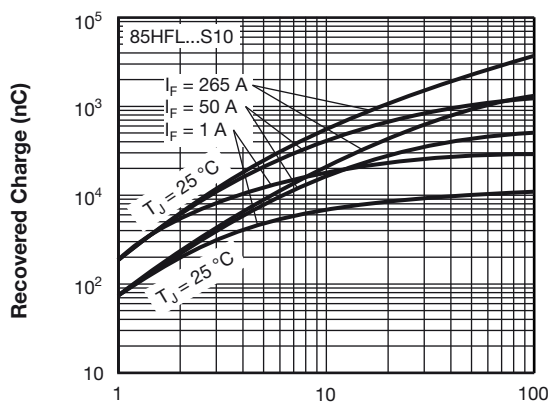

Rate of Fall of Forward Current (A/μs)  
Fig. 36 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S10 Series

## LINKS TO RELATED DOCUMENTS


Dimensions

[www.vishay.com/doc?95312](http://www.vishay.com/doc?95312)



## DO-203AB (DO-5) for 40HFL, 70HFL and 85HFL

### DIMENSIONS FOR 40HFL/70HFL in millimeters (inches)

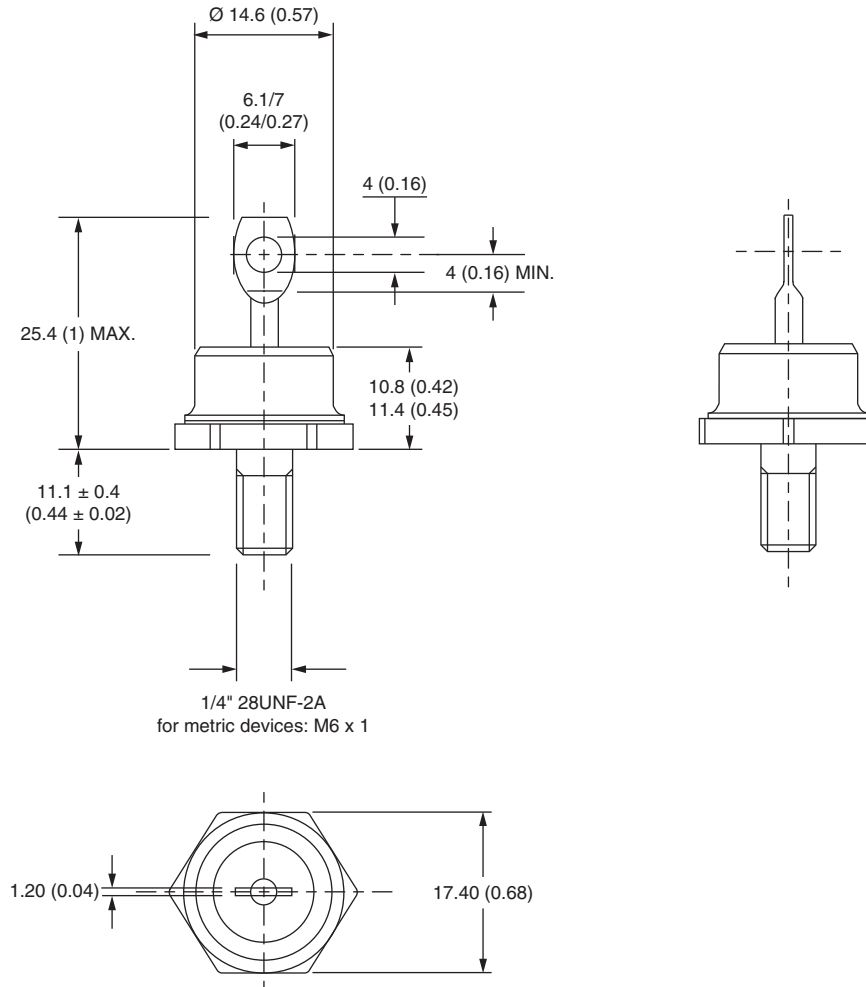


# Outline Dimensions

Vishay Semiconductors

DO-203AB (DO-5) for  
40HFL, 70HFL and 85HFL



## DIMENSIONS FOR 85HFL in millimeters (inches)

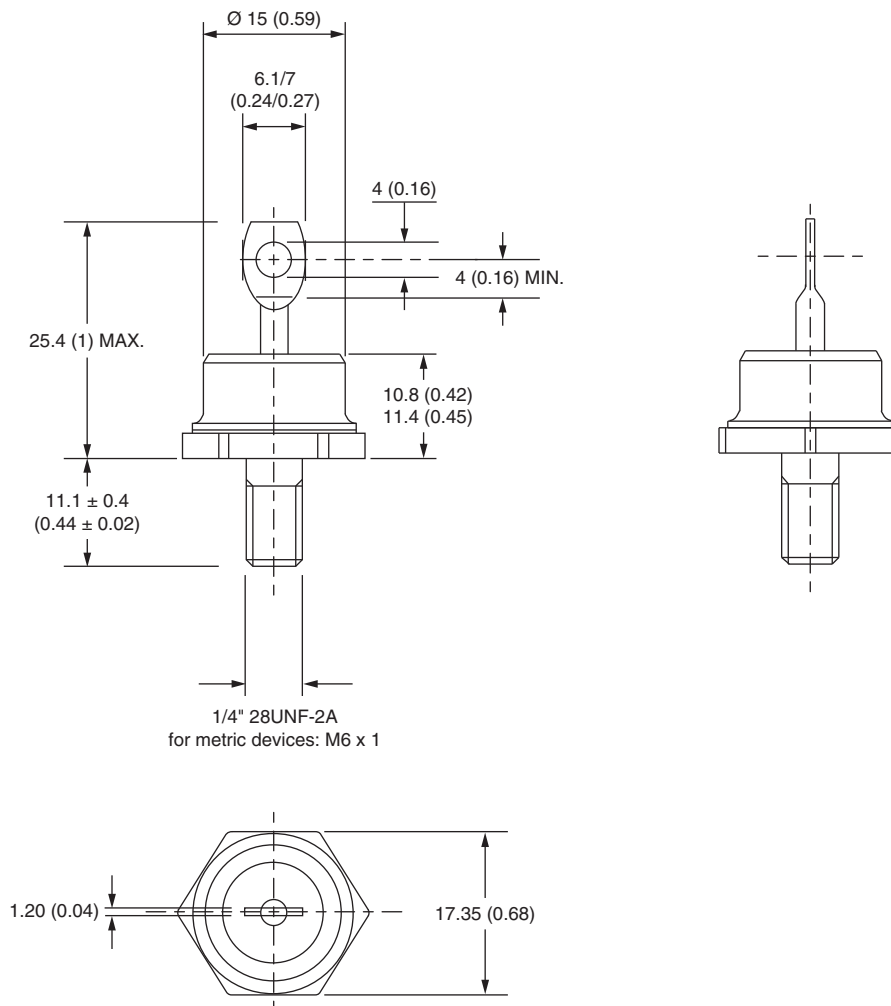



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ