

ETQ-SX SERIES

Model	Output		Efficiency
ETQ24SX	24V	200A	85%
ETQ26SX	26V	190A	85%
ETQ28SX	28V	175A	85%
ETQ48SX	48V	100A	85%

DESCRIPTION

The High Power PFC isolated Front Ends provide 24, 26, 28 and 48VDC single output. Complete front-end solutions for driving high density DC to DC modules in distributed Power Systems with (N+1) redundancy. Meeting international safety and EMI standards, this ET series provides high reliable and rugged compact power with DMTBF over 500,000 hours.

FEATURES

- Power Factor (>0.99)
- 0 C to +50 C at full load
- Standard 5" X 5" X 15.50" envelope
- Output Fully Floating
- Overcurrent Protection
- Overvoltage Protection
- Remote Sense
- Overtemperature Protection
- Self-contained Forced Air Cooling
- Meets UL, CSA and VDE Safety
- Meets EMI EN88155 Level A ISO9001 (1997)

OPTIONS

- Hot Pluggable
- Wide Temp Operation
- Power Fall Signal
- Logic Inhibit
- Single Wire Current Sharing
- Power Good Single
- Diode Isolation
- Output Current monitor
- Three Phase AC Input

ELECTRICAL SPECIFICATIONS

INPUTS

RANGE: Full input Range 180 to 264 VAC.
FREQUENCY: 43 to 63Hz.
INRUSH CURRENT: 25A averaged over ½ cycle
HARMONIC CURRENT: <5%
EFFICIENCY: 80% to 85% (Measured at full load and 208 VAC Input)

OUTPUTS

VOLTAGE: See Table
CURRENT: See Table
ADJUSTMENT RANGE: +/- 10% of nominal output voltage.
POLARITY: Output is isolated. It may be referenced plus/minus as required.
REMOTE SENSING: Compensates for up to 0.5V total loop drop in the output line.
STATIC REGULATION: Line: +/- 0.25% over full line range.
Load: Option: +/- % zero load to full load. Droop IFE: Option: the output sags from +5% when the load is increased from 10% to 100%.
VOLTAGE STABILITY: +/-0.1% FOR 24 hour period after 30 minute warm up.
OUTPUTS
TEMP COEFFICIENT: +/-0.02%/ C FROM 0 c TO +50 c. For Wide Temperature. Option: +/- 0.035%/ C from -30 C to +70 C.
P-P RIPPLE AND NOISE: 1% (20Hz to 50MHz Bandwidth).
MINIMUM LOAD: Not Required.
TURN ON DELAY: 1 sec. Max from application of AC line.
OVER VOLTAGE PROTECTION: 125% +/-5% of nominal. OVP shutdown is latched until the input line is removed for 5 secs and then reapplied. OVP sensing is don at the output terminals.
OVERCURRENT PROTECTION: Current I=Limit Point: 110% to 120% of full load.

ETQ-SX SERIES

ENVIRONMENTAL

OVERTEMPERATURE PROTECTION:

Automatically shuts down and latches the unit in the event of an over temperature condition. After cool down, power must be recycled to restart the unit.

AUDIBLE NOISE: 63 dBA max at 1 meter. 70 dBA for high speed fans. (See Output Tables for units with high speed fan).

TEMPERATURE: Standard: 0 C to +50 C at full load. Storage: -55 C to +85 C.

HUMIDITY: 20% to 95% non-condensing.

ALTITUDE: Operating: 5,000 Ft. Derates to 85% at 10,000 Ft. Non-Operating at 30,000 feet.

VIBRATION: Operating: From 5 to 27Hz, 0.02" double amplitude: from 27 to 500Hz, 0.75G, 3 Axes, 5 min/octave sweep, dwell 1 min at resonance.

Non-Operating: From 5 to 17Hz, 0.01" double amplitude: from 17 to 500Hz, 1.5G peak: 3 axes, 5min/octave sweep, dwell 1 min at resonance.

MTBF: 500,000 hours

SHOCK: Operating: 5G, half sine, 11msec 3 axes. Non-Operating: 15G half sine, 11 msec, 3 axes.


COOLING: Forced air, internal fan Airflow normally exits at connector.

EMI: Conducted & Radiated EN55022 level A

SAFETY: Meets UL1950 , CSA1950, and TUV t EN60950. Factory is an approved BABT manufacturer.

DIMENSIONS:

Weight: 14.8 lbs.

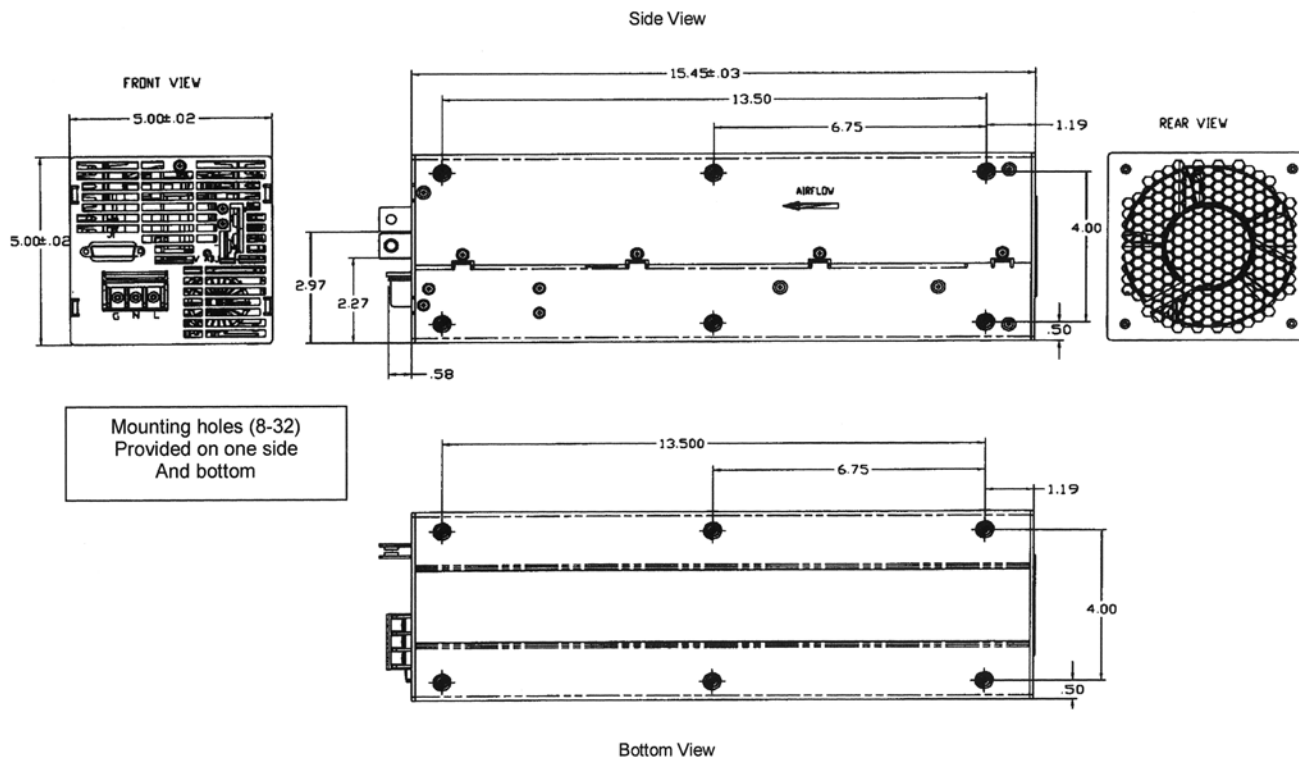

ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ