

Compact Side-on PMT

Photosensor Modules H7711/H7712/H8568/H8569 Series



The H7711/H7712/H8568/H8569 series photosensor modules incorporate a 13-mm (1/2") diameter side-on photomultiplier tube, a high-voltage power supply circuit and a low noise amplifier. Two types of amplifiers are available with a current-to-voltage conversion coefficient of 1 V/μA or 0.1 V/μA and a frequency bandwidth of 20 kHz or 200 kHz. Because of different characteristics of the power supply circuit, the H7711/H7712 series features low power consumption, while the H8568/H8569 series offers fast settling time. Five types of photomultiplier tubes are provided as standard lineups to meet various needs for spectral response range.

Product Variations

Type No.					Current-to-Voltage Conversion Factor	Frequency Bandwidth	Features
185 nm to 750 nm	185 nm to 900 nm	185 nm to 900 nm	185 nm to 830 nm	185 nm to 650 nm			
H7711-11	H7711-12	H7711-13	H7711-14	H7711-15	1 V/μA	DC to 20 kHz	Low power consumption
H7712-11	H7712-12	H7712-13	H7712-14	H7712-15	0.1 V/μA	DC to 200 kHz	
H8568-01	H8568-02	H8568-03	H8568-04	H8568-05	1 V/μA	DC to 20 kHz	Fast settling time
H8569-01	H8569-02	H8569-03	H8569-04	H8569-05	0.1 V/μA	DC to 200 kHz	

Specifications




Parameter			H7711 / H7712 / H8568 / H8569 Series					Unit	
Suffix	H7711/H7712 Series		-11	-12	-13	-14	-15	—	
	H8568/H8569 Series		-01	-02	-03	-04	-05		
Input Voltage			±11.5 to ±15.5					V	
Max. Input Voltage			±18					V	
Max. Input Current			H7711/H7712 Series: +7/-1 H8568/H8569 Series: +25/-1					mA	
Max. Control Voltage			+1.2 (Input Impedance H7711/H7712 Series: 1 MΩ, H8568/H8569 Series: 100 kΩ)					V	
Recommended Control Voltage Adjustment Range			+0.25 to +1.0					V	
Effective Area			3.7 × 13.0					mm	
Sensitivity Adjustment Range			1: 10 ⁴					—	
Peak Sensitivity Wavelength			420	400	450	530	340	nm	
Cathode	Luminous Sensitivity	Min.	80	200	350	140	20	μA/lm	
		Typ.	120	300	500	200	40		
	Blue Sensitivity Index (CS 5-58)		10	—	—	—	5	—	
	Red/White Ratio		—	0.3	0.4	0.15	—	—	
	Radiant Sensitivity *1		90	77	105	70	48	mA/W	
H7711/H8568 Series (with internal 20 kHz amp)									
Anode	Luminous Sensitivity *2	Min.	1.0 × 10 ⁸	4.0 × 10 ⁸	1.0 × 10 ⁹	3.0 × 10 ⁸	5.0 × 10 ⁷	V/lm	
		Typ.	7.0 × 10 ⁸	2.0 × 10 ⁹	2.0 × 10 ⁹	7.0 × 10 ⁸	3.0 × 10 ⁸		
	Radiant Sensitivity *1 *2		520	520	420	250	360	V/nW	
	Voltage Output Depending on PMT Dark Current *2 *3	Typ.	1	1	2	0.1	0.5	mV	
Max.		10	10	10	1	5			
Max. Output Signal Voltage			+10 (Load resistance 10 kΩ)					V	
Current-to-Voltage Conversion Factor			1					V/μA	
H7712/H8569 Series (with internal 200 kHz amp)									
Anode	Luminous Sensitivity *2	Min.	1.0 × 10 ⁷	4.0 × 10 ⁷	1.0 × 10 ⁸	3.0 × 10 ⁷	5.0 × 10 ⁶	V/lm	
		Typ.	7.0 × 10 ⁷	2.0 × 10 ⁸	2.0 × 10 ⁸	7.0 × 10 ⁷	3.0 × 10 ⁷		
	Radiant Sensitivity *1 *2		52	52	42	25	36	V/nW	
	Voltage Output Depending on PMT Dark Current *2 *3	Typ.	0.1	0.1	0.2	0.01	0.05	mV	
Max.		1	1	1	0.1	0.5			
Max. Output Signal Voltage			+1 (Load resistance 10 kΩ)					V	
Current-to-Voltage Conversion Factor			0.1					V/μA	
			H7711 Series	H7712 Series	H8568 Series	H8569 Series			
Offset Voltage *2		Typ.	±3					mV	
Ripple Noise *2 *4 (peak to peak)		Max.	1	3	1	3		mV	
Settling Time *5			10			0.2		s	
Operating Ambient Temperature			+5 to +50			+5 to +45		°C	
Storage Temperature			-20 to +50					°C	
Weight			100					g	

*1: Measured at the peak sensitivity wavelength *2: Control voltage = +1.0 V *3: After 30 minute storage in darkness

*4: Cable RG-174/U, Cable length 450 mm, Load resistance = 1 MΩ, Load capacitance = 22 pF


*5: The time required for the output to reach a stable level following a change in the control voltage from +1.0 V to +0.5 V.

Characteristics (Anode radiant sensitivity, PMT gain)

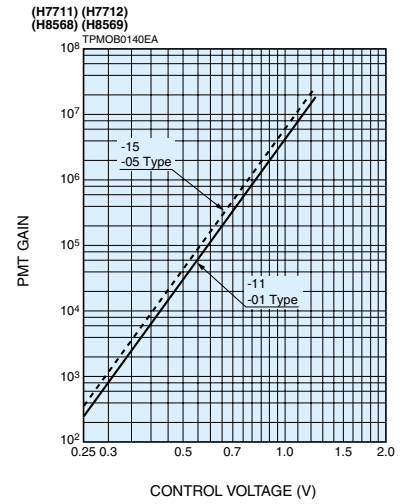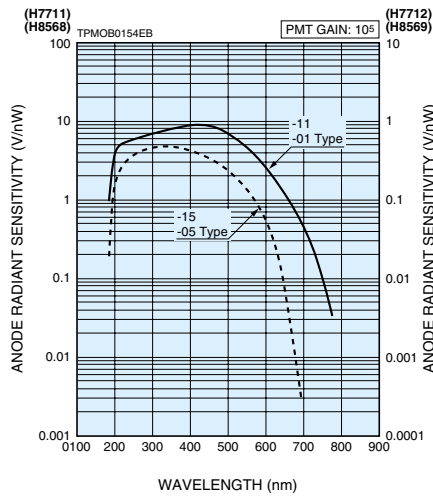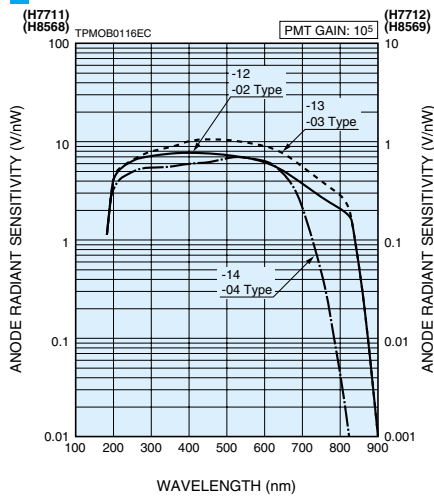


Sensitivity Adjustment Method

VOLTAGE PROGRAMMING

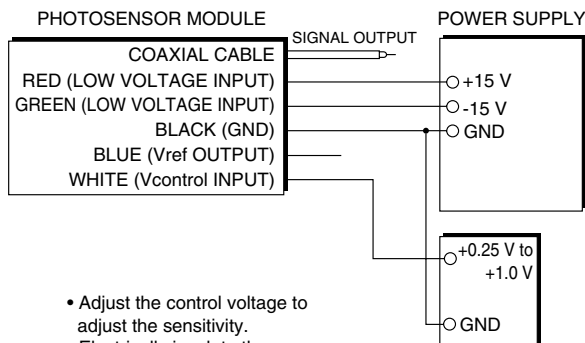


RESISTANCE PROGRAMMING

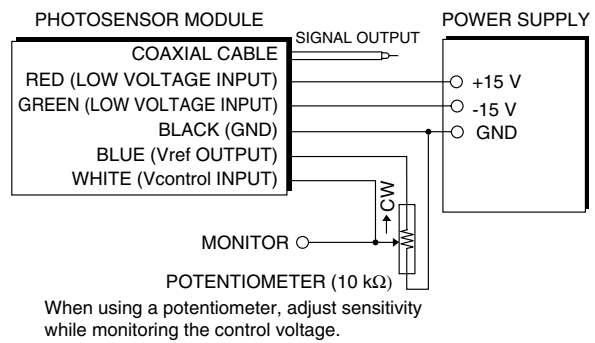


TPMOC0147EC

Dimensional Outlines (Unit: mm)

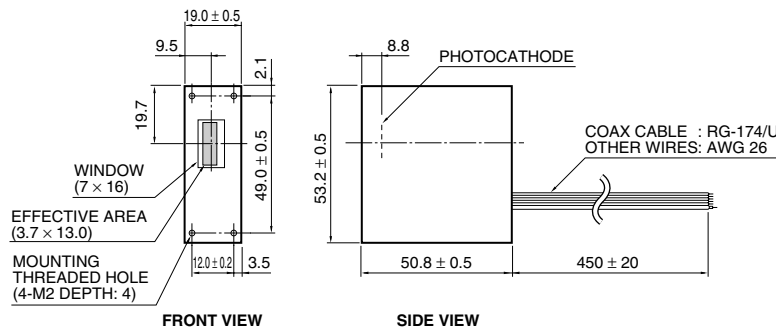

TPMOA0013ED

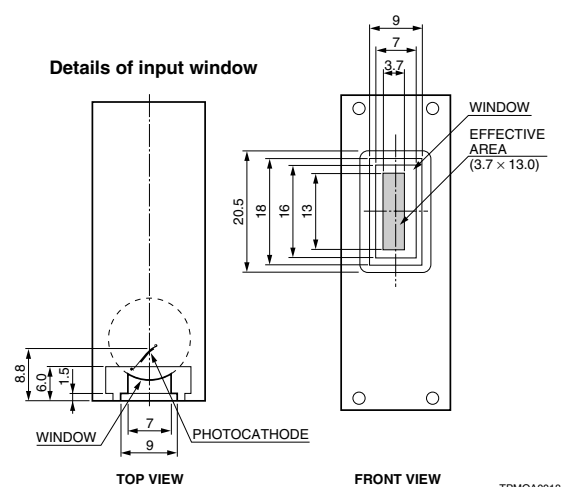



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ