


**OCTAL BUS TRANSCEIVER (3-STATE): HCT245 NON INVERTING  
HCT640 INVERTING, HCT643 INVERTING/NON INVERTING**

- **HIGH SPEED**  
 $t_{PD} = 10 \text{ ns (TYP.) at } V_{CC} = 5V$
- **LOW POWER DISSIPATION**  
 $I_{CC} = 4 \mu A \text{ (MAX.) at } T_A = 25^\circ C$
- **COMPATIBLE WITH TTL OUTPUTS**  
 $V_{IH} = 2V \text{ (MIN.) } V_{IL} = 0.8V \text{ (MAX.)}$
- **OUTPUT DRIVE CAPABILITY**  
15 LSTTL LOADS
- **SYMMETRICAL OUTPUT IMPEDANCE**  
 $|I_{OH}| = I_{OL} = 6 \text{ mA (MIN)}$
- **BALANCED PROPAGATION DELAYS**  
 $t_{PLH} = t_{PHL}$
- **PIN AND FUNCTION COMPATIBLE**  
WITH 54/74LS245/640/643

**DESCRIPTION**

The M54/74HCT245, HCT640 and HCT643 utilise silicon gate C<sup>2</sup>MOS technology to achieve operating speeds equivalent to LSTTL devices.


Along with the low power dissipation and high noise immunity of standard CMOS integrated circuit, it possesses the capability to drive 15 LSTTL loads. These IC's are intended for two-way asynchronous communication between data buses, and the direction of data transmission is determined by DIR input. The enable input ( $\overline{G}$ ) can be used to disable the device so that the buses are effectively isolated. All input are equipped with protection circuits against static discharge and transient discharge. These integrated circuits have input and output

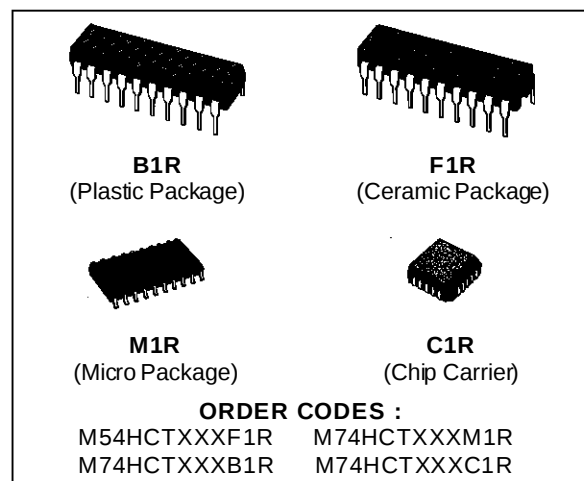

characteristics that are fully compatible with 54/74 LSTTL logic families. M54/74HCT devices are designed to directly interface HSC<sup>2</sup>MOS systems with TTL and NMOS components. They are also plug in replacements for LSTTL devices giving a reduction of power consumption.

IT IS PROHIBITED TO APPLY A SIGNAL TO A BUS TERMINAL WHEN IT IS IN OUTPUT MODE AND WHEN A BUS TERMINAL IS FLOATING (HIGH IMPEDANCE STATE), IT IS REQUESTED TO FIX THE INPUT LEVEL BY MEANS OF EXTERNAL PULL DOWN OR PULL UP RESISTOR.

**PIN CONNECTION (top view)**

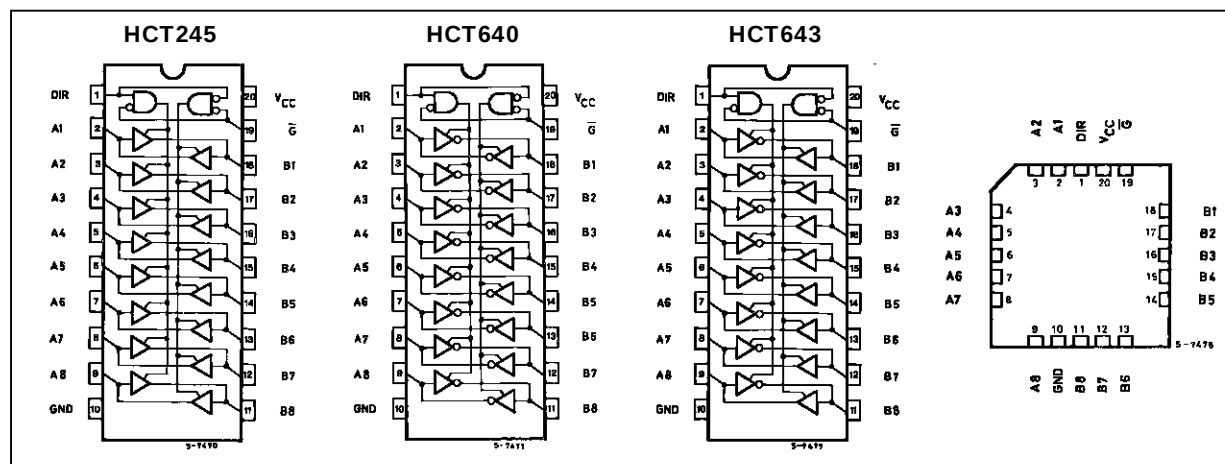

## M54/M74HCT245/640/643


### INPUT AND OUTPUT EQUIVALENT CIRCUIT



### PIN DESCRIPTION

| PIN No                         | SYMBOL         | NAME AND FUNCTION                |
|--------------------------------|----------------|----------------------------------|
| 1                              | DIR            | Directional Control              |
| 2, 3, 4, 5, 6, 7, 8, 9         | A1 to A8       | Data Inputs/Outputs              |
| 18, 17, 16, 15, 14, 13, 12, 11 | B1 to B8       | Data Inputs/Outputs              |
| 19                             | $\overline{G}$ | Output Enabel Input (Active LOW) |
| 10                             | GND            | Ground (0V)                      |
| 20                             | Vcc            | Positive Supply Voltage          |

### IEC LOGIC SYMBOLS

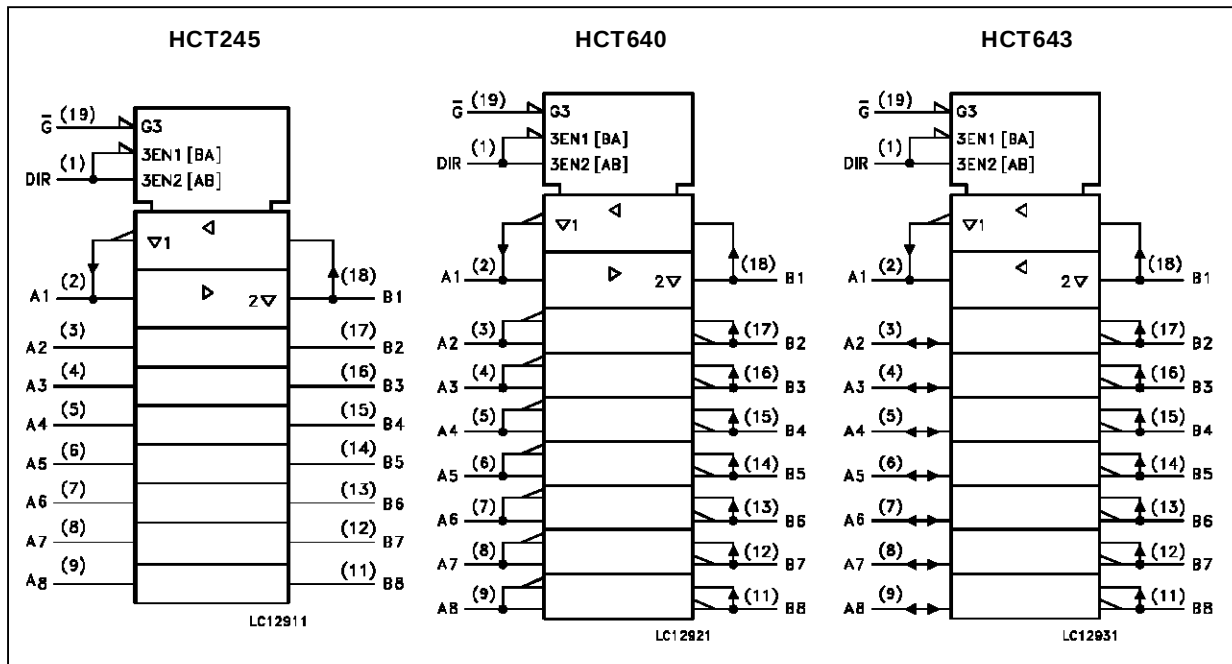


### TRUTH TABLE

| INPUT          |     | FUNCTION |        | OUTPUT |                    |                    |
|----------------|-----|----------|--------|--------|--------------------|--------------------|
| $\overline{G}$ | DIR | A BUS    | B BUS  | HCT245 | HCT640             | HCT643             |
| L              | L   | OUTPUT   | INPUT  | A = B  | A = $\overline{B}$ | A = B              |
| L              | H   | INPUT    | OUTPUT | B = A  | B = $\overline{A}$ | B = $\overline{A}$ |
| H              | X   | Z        | Z      | Z      | Z                  | Z                  |

X: "H" or "L"

Z: High impedance

## LOGIC DIAGRAM (HCT640)

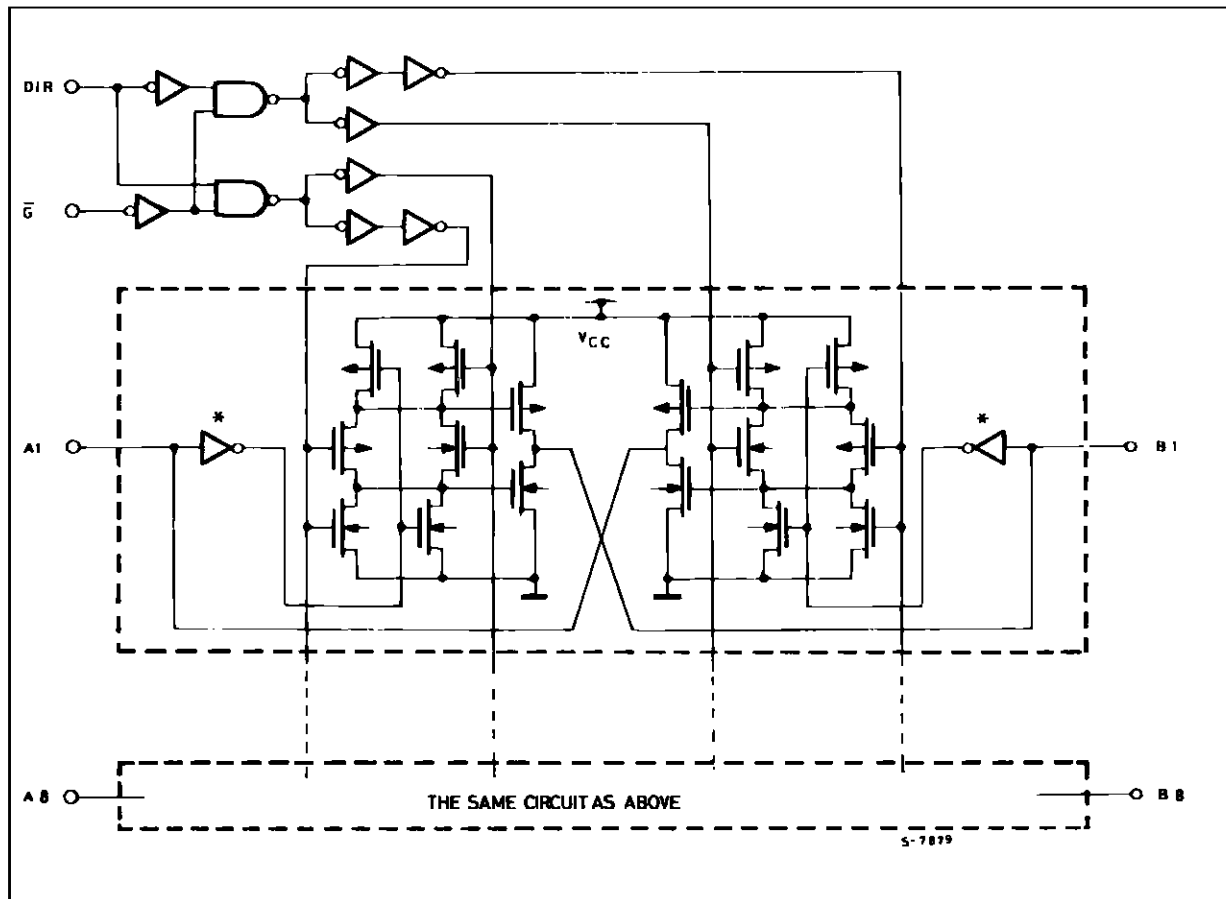

NOTE: IN CASE OF HCT245 OR HCT643, INPUT INVERTERS MARKED\* AT A BUS AND B BUS ARE ELIMINATED RESPECTIVELY

## ABSOLUTE MAXIMUM RATINGS

| Symbol                | Parameter                                    | Value                  | Unit               |
|-----------------------|----------------------------------------------|------------------------|--------------------|
| $V_{CC}$              | Supply Voltage                               | -0.5 to +7             | V                  |
| $V_I$                 | DC Input Voltage                             | -0.5 to $V_{CC} + 0.5$ | V                  |
| $V_O$                 | DC Output Voltage                            | -0.5 to $V_{CC} + 0.5$ | V                  |
| $I_{IK}$              | DC Input Diode Current                       | $\pm 20$               | mA                 |
| $I_{OK}$              | DC Output Diode Current                      | $\pm 20$               | mA                 |
| $I_O$                 | DC Output Source Sink Current Per Output Pin | $\pm 35$               | mA                 |
| $I_{CC}$ or $I_{GND}$ | DC $V_{CC}$ or Ground Current                | $\pm 70$               | mA                 |
| $P_D$                 | Power Dissipation                            | 500 (*)                | mW                 |
| $T_{stg}$             | Storage Temperature                          | -65 to +150            | $^{\circ}\text{C}$ |
| $T_L$                 | Lead Temperature (10 sec)                    | 300                    | $^{\circ}\text{C}$ |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

(\*) 500 mW:  $\pm 65^{\circ}\text{C}$  derate to 300 mW by 10mW/ $^{\circ}\text{C}$ :  $65^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

## M54/M74HCT245/640/643

### RECOMMENDED OPERATING CONDITIONS

| Symbol     | Parameter                                                         | Value                     | Unit                                     |
|------------|-------------------------------------------------------------------|---------------------------|------------------------------------------|
| $V_{CC}$   | Supply Voltage                                                    | 4.5 to 5.5                | V                                        |
| $V_I$      | Input Voltage                                                     | 0 to $V_{CC}$             | V                                        |
| $V_O$      | Output Voltage                                                    | 0 to $V_{CC}$             | V                                        |
| $T_{op}$   | Operating Temperature: <b>M54HC Series</b><br><b>M74HC Series</b> | -55 to +125<br>-40 to +85 | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$ |
| $t_r, t_f$ | Input Rise and Fall Time ( $V_{CC} = 4.5$ to $5.5\text{V}$ )      | 0 to 500                  | ns                                       |

### DC SPECIFICATIONS


| Symbol           | Parameter                            | Test Conditions        |                                                                                                                                       |                         |                                         | Value |      |                      |      |                       | Unit |      |
|------------------|--------------------------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------------------|-------|------|----------------------|------|-----------------------|------|------|
|                  |                                      | V <sub>CC</sub><br>(V) |                                                                                                                                       |                         | T <sub>A</sub> = 25 °C<br>54HC and 74HC |       |      | -40 to 85 °C<br>74HC |      | -55 to 125 °C<br>54HC |      |      |
|                  |                                      |                        |                                                                                                                                       |                         | Min.                                    | Typ.  | Max. | Min.                 | Max. | Min.                  |      | Max. |
| V <sub>IH</sub>  | High Level Input Voltage             | 4.5 to 5.5             |                                                                                                                                       |                         | 2.0                                     |       |      | 2.0                  |      | 2.0                   |      | V    |
| V <sub>IL</sub>  | Low Level Input Voltage              | 4.5 to 5.5             |                                                                                                                                       |                         |                                         |       | 0.8  |                      | 0.8  |                       | 0.8  | V    |
| V <sub>OH</sub>  | High Level Output Voltage            | 4.5                    | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                                                                   | I <sub>O</sub> =-20 μA  | 4.4                                     | 4.5   |      | 4.4                  |      | 4.4                   |      | V    |
|                  |                                      |                        |                                                                                                                                       | I <sub>O</sub> =-6.0 mA | 4.18                                    | 4.31  |      | 4.13                 |      | 4.10                  |      |      |
| V <sub>OL</sub>  | Low Level Output Voltage             | 4.5                    | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                                                                   | I <sub>O</sub> = 20 μA  |                                         | 0.0   | 0.1  |                      | 0.1  |                       | 0.1  | V    |
|                  |                                      |                        |                                                                                                                                       | I <sub>O</sub> = 6.0 mA |                                         | 0.17  | 0.26 |                      | 0.33 |                       | 0.4  |      |
| I <sub>I</sub>   | Input Leakage Current                | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                                                               |                         |                                         |       | ±0.1 |                      | ±1   |                       | ±1   | μA   |
| I <sub>OZ</sub>  | 3 State Output Off State Current     | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                                                               |                         |                                         |       | ±0.5 |                      | ±5.0 |                       | ±10  | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current             | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                                                               |                         |                                         |       | 4    |                      | 40   |                       | 80   | μA   |
| ΔI <sub>CC</sub> | Additional worst case supply current | 5.5                    | Per Input pin<br>V <sub>I</sub> = 0.5V or<br>V <sub>I</sub> = 2.4V<br>Other Inputs at<br>V <sub>CC</sub> or GND<br>I <sub>O</sub> = 0 |                         |                                         |       | 2.0  |                      | 2.9  |                       | 3.0  | mA   |

AC ELECTRICAL CHARACTERISTICS ( $C_L = 50$  pF, Input  $t_r = t_f = 6$  ns)


| Symbol                               | Parameter                     | Test Conditions        |                        |                      | Value                                   |          |      |                      |      |                       | Unit |      |
|--------------------------------------|-------------------------------|------------------------|------------------------|----------------------|-----------------------------------------|----------|------|----------------------|------|-----------------------|------|------|
|                                      |                               | V <sub>CC</sub><br>(V) | C <sub>L</sub><br>(pF) |                      | T <sub>A</sub> = 25 °C<br>54HC and 74HC |          |      | -40 to 85 °C<br>74HC |      | -55 to 125 °C<br>54HC |      |      |
|                                      |                               |                        |                        |                      | Min.                                    | Typ.     | Max. | Min.                 | Max. | Min.                  |      | Max. |
| t <sub>TLH</sub><br>t <sub>THL</sub> | Output Transition Time        | 4.5                    | 50                     |                      |                                         | 7        | 12   |                      | 15   |                       | 18   | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay Time        | 4.5                    | 50                     |                      |                                         | 13       | 22   |                      | 28   |                       | 33   | ns   |
|                                      |                               | 4.5                    | 150                    |                      |                                         | 18       | 30   |                      | 38   |                       | 45   | ns   |
| t <sub>PZL</sub><br>t <sub>PZH</sub> | Output Enable Time            | 4.5                    | 50                     | R <sub>L</sub> = 1KΩ |                                         | 19       | 30   |                      | 38   |                       | 45   | ns   |
|                                      |                               | 4.5                    | 150                    | R <sub>L</sub> = 1KΩ |                                         | 24       | 38   |                      | 48   |                       | 57   | ns   |
| t <sub>PLZ</sub><br>t <sub>PHZ</sub> | Output Disable Time           | 4.5                    | 50                     | R <sub>L</sub> = 1KΩ |                                         | 17       | 30   |                      | 38   |                       | 45   | ns   |
| C <sub>IN</sub>                      | Input Capacitance             |                        | DIR, $\overline{G}$    |                      |                                         | 5        | 10   |                      | 10   |                       | 10   | pF   |
| C <sub>I/OUT</sub>                   | Output Capacitance            |                        | An, Bn                 |                      |                                         | 13       |      |                      |      |                       |      | pF   |
| C <sub>PD</sub> (*)                  | Power Dissipation Capacitance |                        | HCT245<br>HCT640/643   |                      |                                         | 41<br>39 |      |                      |      |                       |      | pF   |

(\*)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/8$  (per circuit)

## SWITCHING CHARACTERISTICS TEST WAVEFORM

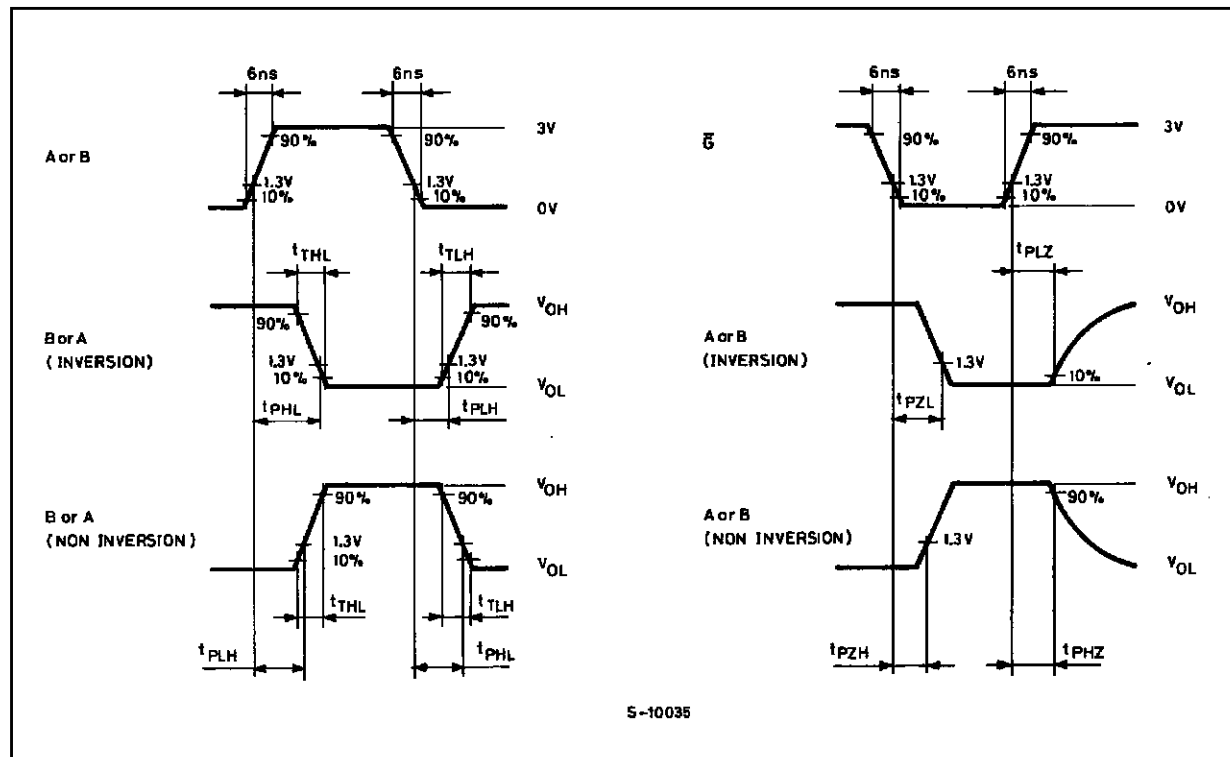

TEST CIRCUIT  $I_{CC}$  (Opr.)

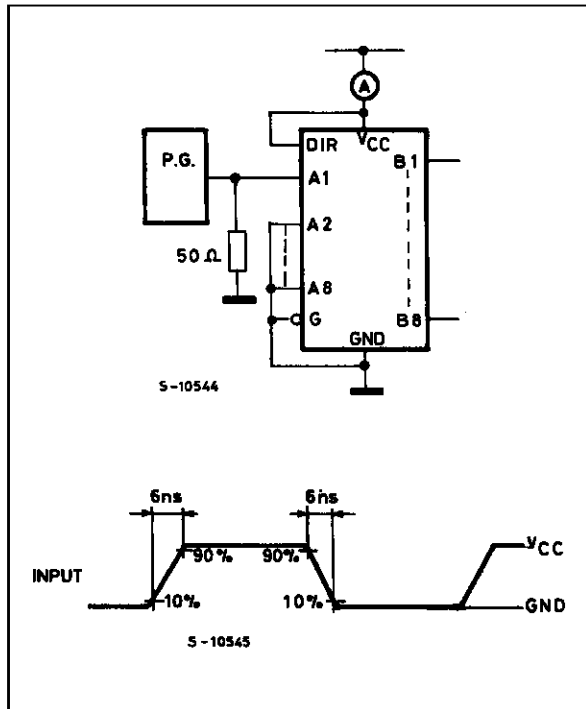

$C_{PD}$  CALCULATION


$C_{PD}$  is to be calculated with the following formula by using the measured value of  $I_{CC}$  (Opr.) in the test circuit opposite.

$$C_{PD} = \frac{I_{CC} (Opr.)}{f_{IN} \times V_{CC}}$$

In determining the value of  $C_{PD}$ , a relatively high frequency of 1 MHz was applied to  $f_{IN}$ , in order to eliminate any error caused by the quiescent supply current.

## Plastic DIP20 (0.25) MECHANICAL DATA

| DIM. | mm    |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.254 |       |      | 0.010 |       |       |
| B    | 1.39  |       | 1.65 | 0.055 |       | 0.065 |
| b    |       | 0.45  |      |       | 0.018 |       |
| b1   |       | 0.25  |      |       | 0.010 |       |
| D    |       |       | 25.4 |       |       | 1.000 |
| E    |       | 8.5   |      |       | 0.335 |       |
| e    |       | 2.54  |      |       | 0.100 |       |
| e3   |       | 22.86 |      |       | 0.900 |       |
| F    |       |       | 7.1  |       |       | 0.280 |
| I    |       |       | 3.93 |       |       | 0.155 |
| L    |       | 3.3   |      |       | 0.130 |       |
| Z    |       |       | 1.34 |       |       | 0.053 |

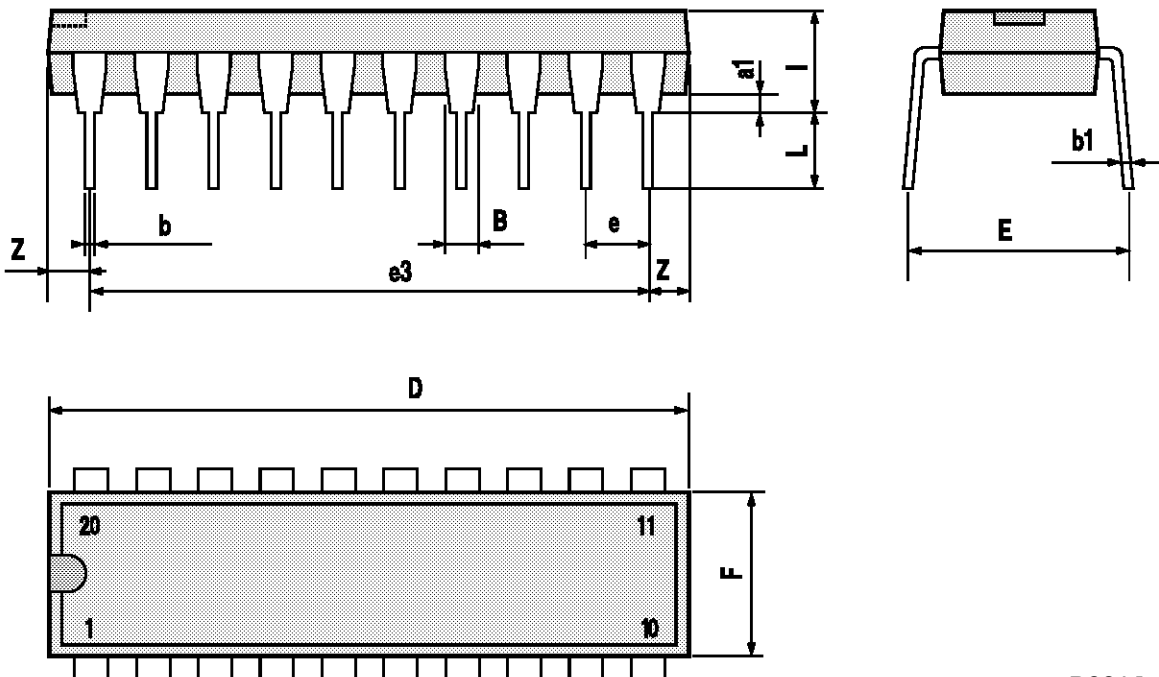

P001J

## Ceramic DIP20 MECHANICAL DATA


| DIM. | mm                    |       |      | inch  |       |       |
|------|-----------------------|-------|------|-------|-------|-------|
|      | MIN.                  | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |                       |       | 25   |       |       | 0.984 |
| B    |                       |       | 7.8  |       |       | 0.307 |
| D    |                       | 3.3   |      |       | 0.130 |       |
| E    | 0.5                   |       | 1.78 | 0.020 |       | 0.070 |
| e3   |                       | 22.86 |      |       | 0.900 |       |
| F    | 2.29                  |       | 2.79 | 0.090 |       | 0.110 |
| G    | 0.4                   |       | 0.55 | 0.016 |       | 0.022 |
| I    | 1.27                  |       | 1.52 | 0.050 |       | 0.060 |
| L    | 0.22                  |       | 0.31 | 0.009 |       | 0.012 |
| M    | 0.51                  |       | 1.27 | 0.020 |       | 0.050 |
| N1   | 4° (min.), 15° (max.) |       |      |       |       |       |
| P    | 7.9                   |       | 8.13 | 0.311 |       | 0.320 |
| Q    |                       |       | 5.71 |       |       | 0.225 |



P057H

## SO20 MECHANICAL DATA

| DIM. | mm         |       |       | inch  |       |       |
|------|------------|-------|-------|-------|-------|-------|
|      | MIN.       | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |       | 2.65  |       |       | 0.104 |
| a1   | 0.10       |       | 0.20  | 0.004 |       | 0.007 |
| a2   |            |       | 2.45  |       |       | 0.096 |
| b    | 0.35       |       | 0.49  | 0.013 |       | 0.019 |
| b1   | 0.23       |       | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.50  |       |       | 0.020 |       |
| c1   | 45° (typ.) |       |       |       |       |       |
| D    | 12.60      |       | 13.00 | 0.496 |       | 0.512 |
| E    | 10.00      |       | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27  |       |       | 0.050 |       |
| e3   |            | 11.43 |       |       | 0.450 |       |
| F    | 7.40       |       | 7.60  | 0.291 |       | 0.299 |
| L    | 0.50       |       | 1.27  | 0.19  |       | 0.050 |
| M    |            |       | 0.75  |       |       | 0.029 |
| S    | 8° (max.)  |       |       |       |       |       |

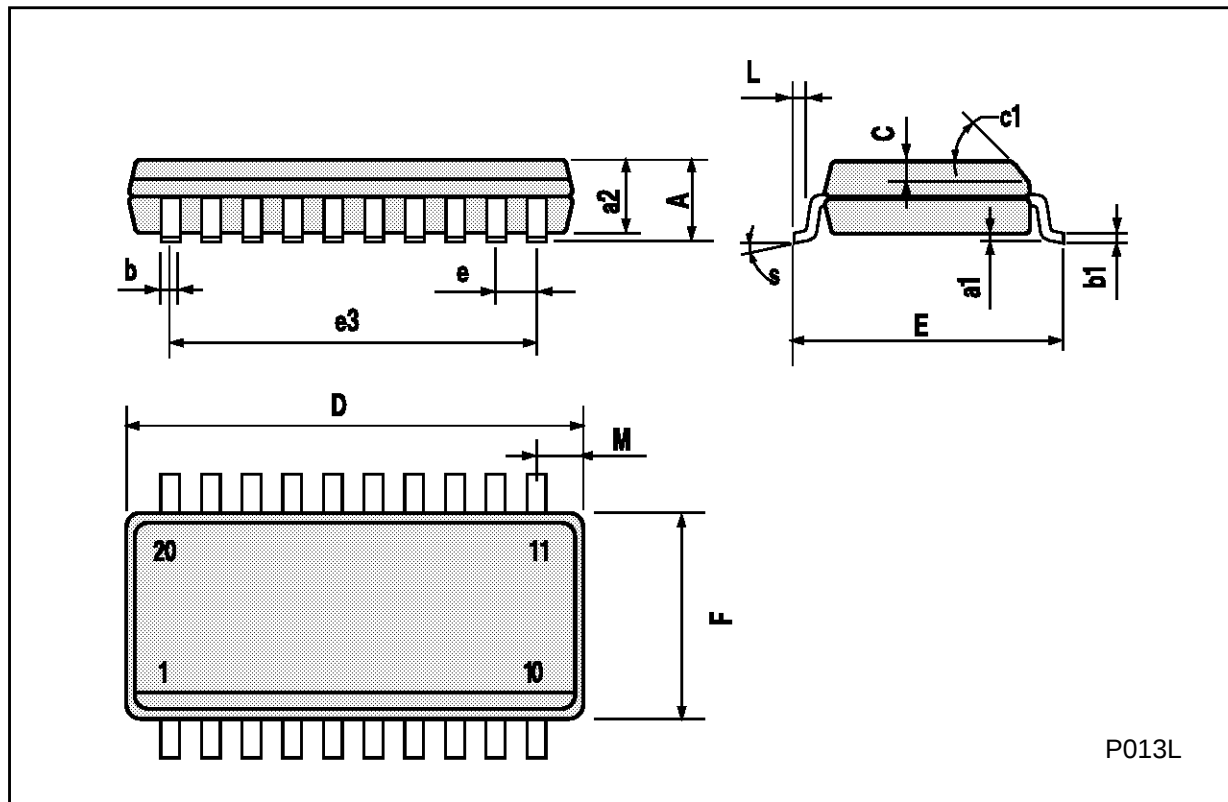

## PLCC20 MECHANICAL DATA

| DIM. | mm   |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 9.78 |      | 10.03 | 0.385 |       | 0.395 |
| B    | 8.89 |      | 9.04  | 0.350 |       | 0.356 |
| D    | 4.2  |      | 4.57  | 0.165 |       | 0.180 |
| d1   |      | 2.54 |       |       | 0.100 |       |
| d2   |      | 0.56 |       |       | 0.022 |       |
| E    | 7.37 |      | 8.38  | 0.290 |       | 0.330 |
| e    |      | 1.27 |       |       | 0.050 |       |
| e3   |      | 5.08 |       |       | 0.200 |       |
| F    |      | 0.38 |       |       | 0.015 |       |
| G    |      |      | 0.101 |       |       | 0.004 |
| M    |      | 1.27 |       |       | 0.050 |       |
| M1   |      | 1.14 |       |       | 0.045 |       |



Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ