


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3		F	ECN 387	06/09/95	C

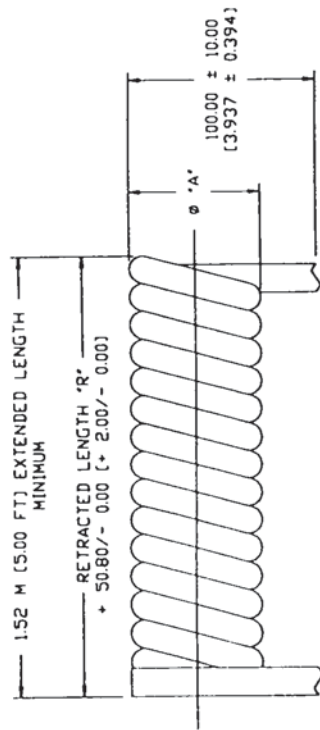

BUNDLE SPECIFICATION

- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=9.0
5	457.20	(18.000)	L=13.00" X W=20.00" X H=9.0
6	558.80	(22.000)	L=13.00" X W=25.00" X H=9.0
CONDUCTORS NUMBER OF	MILLIMETERS RETRACTED LENGTH 'R'	INCHES RETRACTED LENGTH 'R'	DIMENSION MAX. OUTSIDE SHIPPING BOX
TABULATION BLOCK			
THIRD ANGLE PROJECTION			
			
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)			
DR: GETH WYNN E: 06/09/95		TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
CHKD: 		PART NO: 121-X10-0X3	
CHKD: 		CUSTOMER: I/O INTERCONNECT	
CHKD: 		SCALE: NONE	
CHKD: 		SHEET 2 OF 2	


I/O INTERCONNECT

SANTA ANA, CALIFORNIA

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X2		I	ECN 387	06/09/95	CT

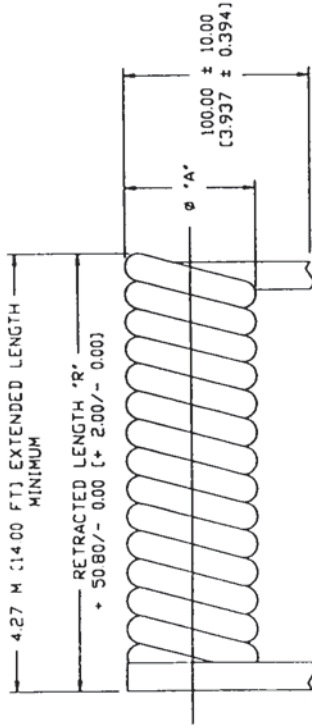

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	[34.000]	L=13.00' X W=40.00' X H=9.00
6	1117.60	[44.000]	L=13.00' X W=50.00' X H=9.00
8	1270.00	[50.000]	L=13.00' X W=55.00' X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX


TABULATION BLOCK

THIRD ANGLE PROJECTION		
I/O INTERCONNECT SANTA ANA, CALIFORNIA		
DR: C. WANG	TITLE: 06/09/95	36 AWG (12/012 MM) BARE COPPER
CHKD: [Signature]	14.00 FT EXTENDED, NON-UL	UNSHIELDED, MODULAR CABLE
CHKD: [Signature]	PART NO: 121-X10-0X2	
CHKD: [Signature]	CUSTOMER: I/O	INTERCONNECT
CHKD: [Signature]	SCALE: NONE	SHEET 2 OF

6/10/95

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 367	06/09/95	G.T.

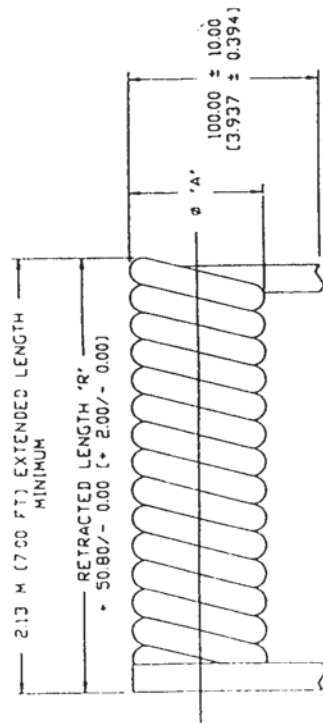

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES

WITH TAPE

4	533.40	(21.000)	L=13.00" X W=25.00" X H=9.00"
6	609.60	(24.000)	L=13.00" X W=25.00" X H=9.00"
8	711.20	(28.000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT 26 AVG (12/0.12 mm) BARE COPPER 7.00 FT. EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
DR: CAVI C. VAG CHG: Valley	TITLE: SANTA ANA, CALIFORNIA DATE: 06/09/95 PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET: 2 OF 2

THIRD ANGLE PROJECTION




UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETER (INCHES)


2) TOLERANCES:

XX ± 0.20 (0.008)


X.XX ± 6.35 (0.250)

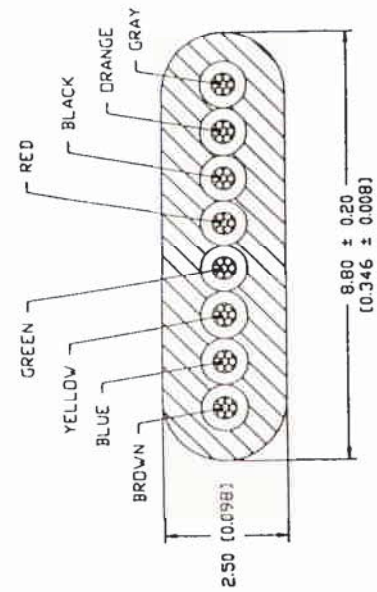

8 CONDUCTOR CABLE

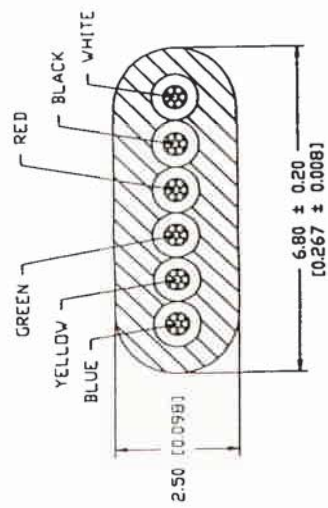

6 CONDUCTOR CABLE

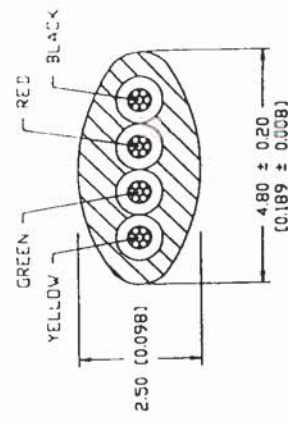

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748 ± 0.0	19.00 ± 1.0
121-810-013	8	BLACK	[0.748 ± 0.0	19.00 ± 1.0
121-810-023	8	WHITE	[0.748 ± 0.0	19.00 ± 1.0
1/0 INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CATH WONG TITLE: 26 AWG (12/012 mm) BARE COPPER
C. WONG 06/09/95 5.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3
CHKD: *[Signature]* CUSTOMER: I/O INTERCONNECT
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

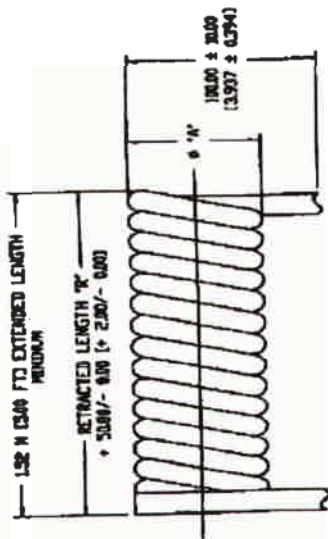

BUNDLE SPECIFICATION


NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.2/0.12 mm) STANNED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHM/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHM/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (500)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY TO BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

CONDUCTORS NUMBER OF	DIMENSION MAX		OUTSIDE SLOPPING BOX
	MILLIMETERS	INCHES	
4	431.00	(17.000)	L=13.00" X V=28.00" X H=9.00"
6	457.20	(18.000)	L=13.00" X V=28.00" X H=9.00"
8	508.00	(20.000)	L=13.00" X V=28.00" X H=9.00"
10	609.60	(24.000)	L=13.00" X V=28.00" X H=9.00"

FABRICATION BLOCK

THIRD ANGLE PROJECTION	I/O INTERCONNECT	SANTA ANA, CALIFORNIA
------------------------	------------------	-----------------------



UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN INCHES (MILLIMETERS)
 2) TOLERANCES:
 XX ± 0.20 (0.008)
 XXX ± 0.25 (0.010)

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ