

Major Ratings and Characteristics

Characteristics	100BGQ045	Units
$I_{F(AV)}$ Rectangular waveform @ T_C	100	A
I_{DC} Maximum	141	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 5 \mu s$ sine	4400	A
V_F @100Apk typical @ T_J	0.63	V
T_J range	-55 to 150	°C

Description/Features

The NEW 100BGQ045 Schottky rectifier has been optimized for ultra low forward voltage drop specifically for low voltage output in high current AC/DC power supplies.

The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150°C T_J operation
- High Frequency Operation
- Ultra low forward voltage drop
- Continuous High Current operation
- Guard ring for enhanced ruggedness and long term reliability
- **PowlRtab™ package**

Case Styles

100BGQ045



100BGQ045J



100BGQ045, 100BGQ045J

PD-20709 rev. C 11/99

International
IOR Rectifier

Voltage Ratings

Part number	100BGQ045
V _R Max. DC Reverse Voltage (V)	45
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	100BGQ	Units	Conditions
I _{F(AV)} Max. Average Forward Current	100	A	50% duty cycle @ T _C = 100°C, rectangular wave form
I _{F(RMS)} RMS Forward Current	141	A	T _C = 95°C
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	4400	A	5µs Sine or 3µs Rect. pulse
	830		10ms Sine or 6ms Rect. pulse
E _{AS} Non-Repetitive Avalanche Energy	40	mJ	T _J = 25 °C, I _{AS} = 6 Amps, L = 2.0 mH
I _{AR} Repetitive Avalanche Current	6	A	Current decaying linearly to zero in 1µsec Frequency limited by T _J max. V _A = 1.5 × V _R typical

Electrical Specifications

Parameters	100BGQ		Units	Conditions	
	Typ.	Max.			
V _{FM} Forward Voltage Drop (1) (2)	0.52	0.56	V	@ 50A	T _J = 25 °C
	0.67	0.73	V	@ 100A	
	0.47	0.52	V	@ 50A	T _J = 150 °C
	0.63	0.68	V	@ 100A	
I _{RM} Reverse Leakage Current (1)	0.3	1	mA	T _J = 25 °C	V _R = rated V _R
	180	320	mA	T _J = 125 °C	
	600	1000	mA	T _J = 150 °C	V _R = 45 V
V _{F(TO)} Threshold Voltage	0.379	V T _J = T _J max.			
r _t Forward Slope Resistance	2.7	mΩ			
C _T Max. Junction Capacitance	2700	pF		V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25 °C	
L _S Typical Series Inductance	3.5	nH		Measured from tab to mounting plane	
dv/dt Max. Voltage Rate of Change (Rated V _R)	10,000V/	µs			

(1) Pulse Width < 300µs, Duty Cycle < 2%

(2) V_{FM} = V_{F(TO)} + r_t × I_F

Thermal-Mechanical Specifications

Parameters		100BGQ	Units	Conditions
T _J	Max. Junction Temperature Range	-55to150	°C	
T _{stg}	Max. Storage Temperature Range	-55to150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case	0.50	°C/W	DCoperation
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.20	°C/W	Mountingsurface ,smoothandgreased
wt	Approximate Weight	5(0.18)	g(oz.)	
T	Mounting Torque	Min.	1.2(10)	N*m (lbf-in)
		Max.	2.4(20)	
Case Style		PowIRtab™		

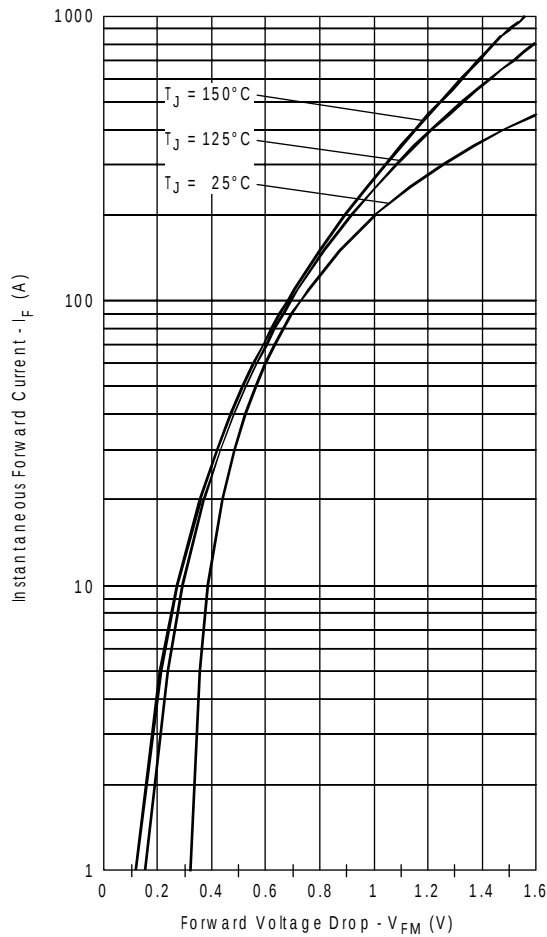


Fig. 1 - Maximum Forward Voltage Drop Characteristics

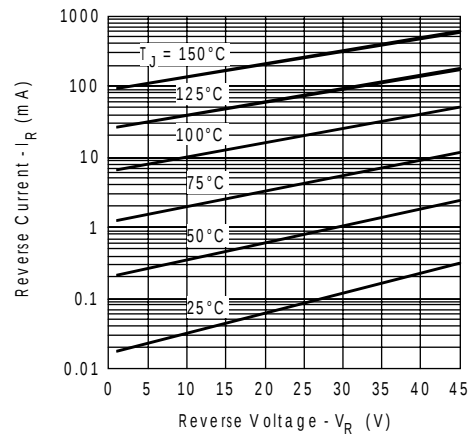


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

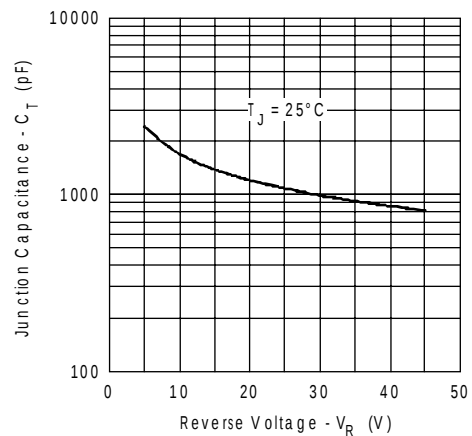


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

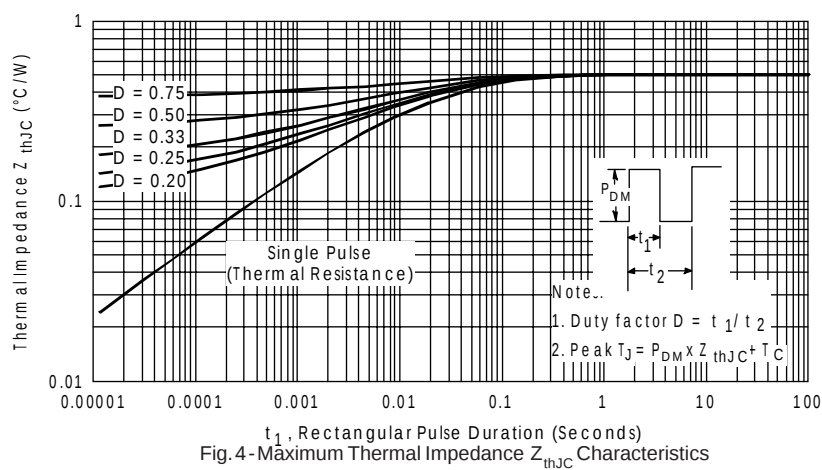


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

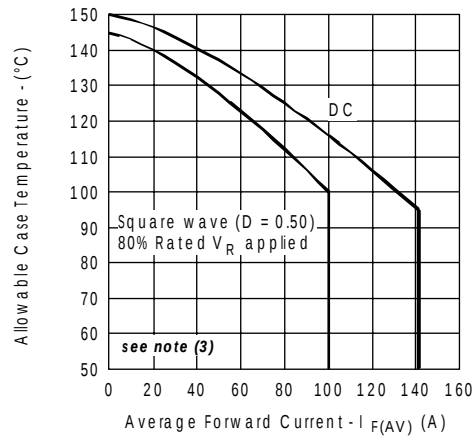
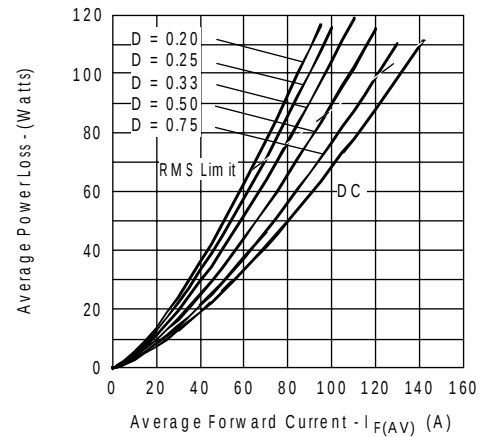
Fig. 5 - Maximum Allowable Case Temperature
Vs. Average Forward Current

Fig. 6 - Forward Power Loss Characteristics

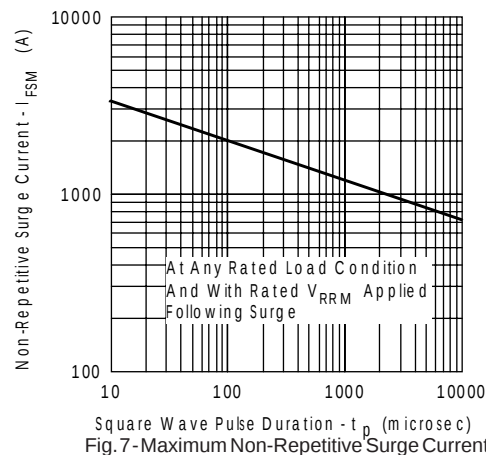


Fig. 7 - Maximum Non-Repetitive Surge Current

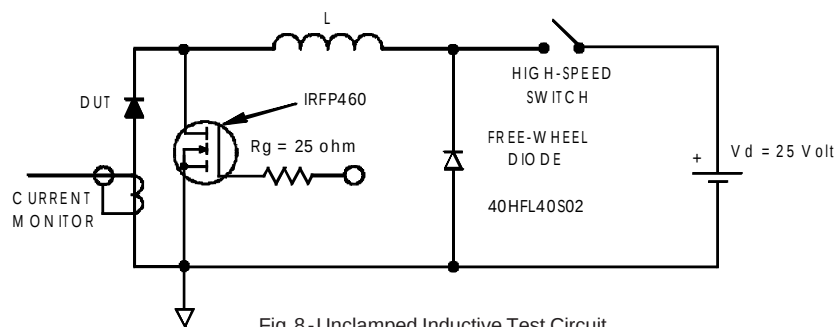


Fig. 8 - Unclamped Inductive Test Circuit

(3) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;


P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$


Ordering Information Table

Device Code			
100	BGQ	045	J
①	②	③	④
1	2	3	4
1	- Current Rating		
2	- Essential Part Number		
3	- Voltage code: Code = V_{RRM}		
4	- none = PowIRtab™ standard		
	J = Short Lead Version		

Outline Table

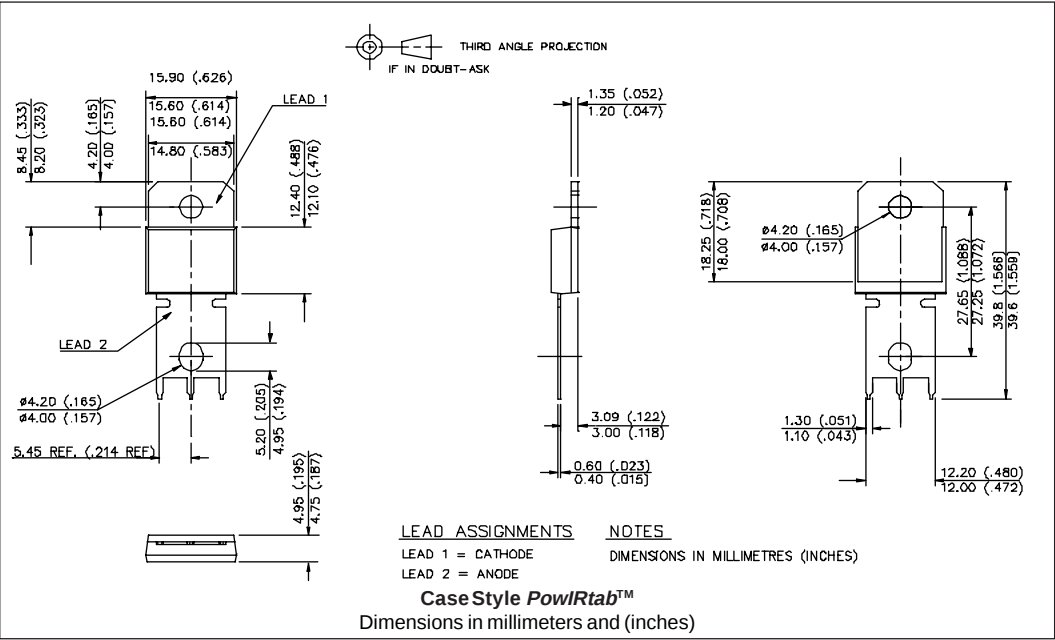

Outline Table

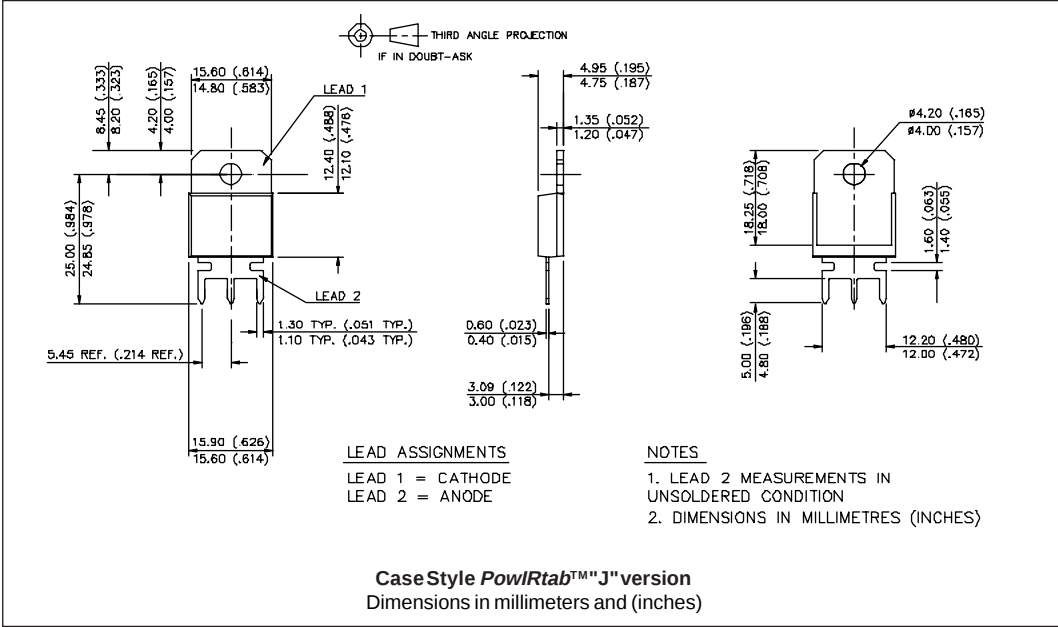

```

*****
This model has been developed by
Wizard SPICE MODEL GENERATOR(1999)
(International Rectifier Corporation)
contains Proprietary Information

*****

SPICE Model Diode is composed by a
simple diode plus paralalled VCG2T
*****

.SUBCKT 100bgq45 ANO CAT
D1 ANO 1 DMOD (0.24359)
*Define diode model
.MODEL DMOD D(IS=6.61799286342482E-05A,N=1.0212796726385,BV=45V,
+IBV=0.115140026620575A,RS=0.0005748724,CJO=3.31930927290723E-08,
+VJ=0.456112448442971,XTI=2,EG=0.721992455742664)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=9.83346387011944)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP(((((-2.949174E-03/
9.833464)*(V(2,CAT)*1E6)/(I(VX)+1E-6)-1))+1)*6.600191E-2*ABS(V(ANO,CAT)))-1}}

*****

.ENDS100bgq45

Thermal Model Subcircuit
.SUBCKT 100bgq45T 5 1

CTHERM1 5 4 1.66E+3
CTHERM2 4 3 2.22E+2
CTHERM3 3 2 1.48E+5
CTHERM4 2 1 3.12E+5

RTHERM1 5 4 3.42E-2
RTHERM2 4 3 2.55E-1
RTHERM3 3 2 8.41E-2
RTHERM4 2 1 1.81E-4

.ENDS 100bgq45T

```



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ