


## SERIES 62C Concentric Shaft

### FEATURES

- Economical Size
- Combined Functionality
- Optically Coupled for More than a Million Cycles of Operations
- Optional Integral Pushbutton
- Compatible with CMOS, TTL, and HCMOS Logic
- Available with 12, 16, 24, and 32 Detent Positions for Each Code Section
- Choices of Cable Length and Terminations
- Available in 3.3 Volt Input.  
(Contact Grayhill for details)

### APPLICATIONS


- Used to Set Radio Frequency, Drill Depth, RPM, Menu Selection, Parameter Selection for Patient Monitoring Devices, etc.

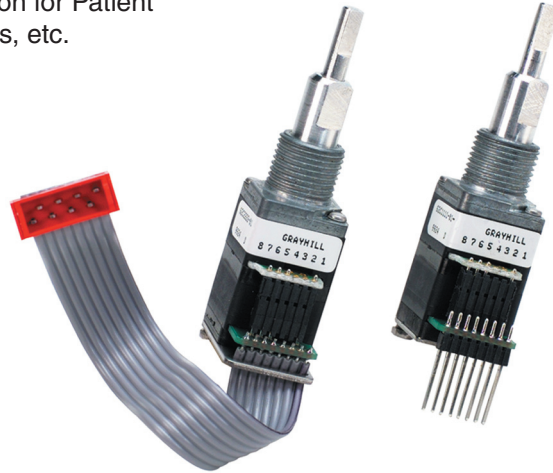


### DIMENSIONS In inches (and millimeters)

Unless otherwise specified, standard tolerance are:

Linear  $\pm .025$   
Diameter  $\pm .010$   
Angle  $\pm 2.0^\circ$

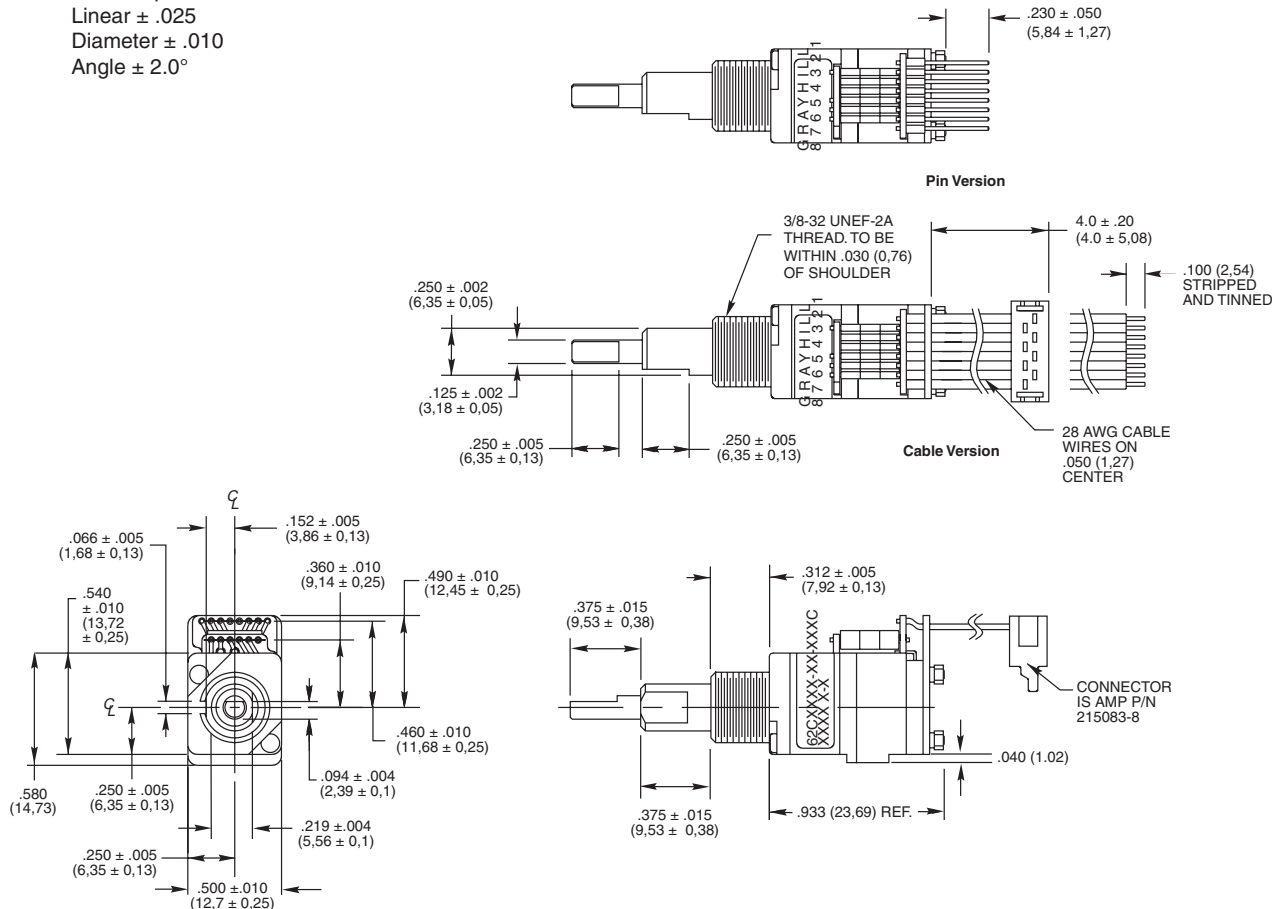

## CIRCUITRY, TRUTH TABLE AND WAVEFORM: Standard Quadrature 2-Bit Code

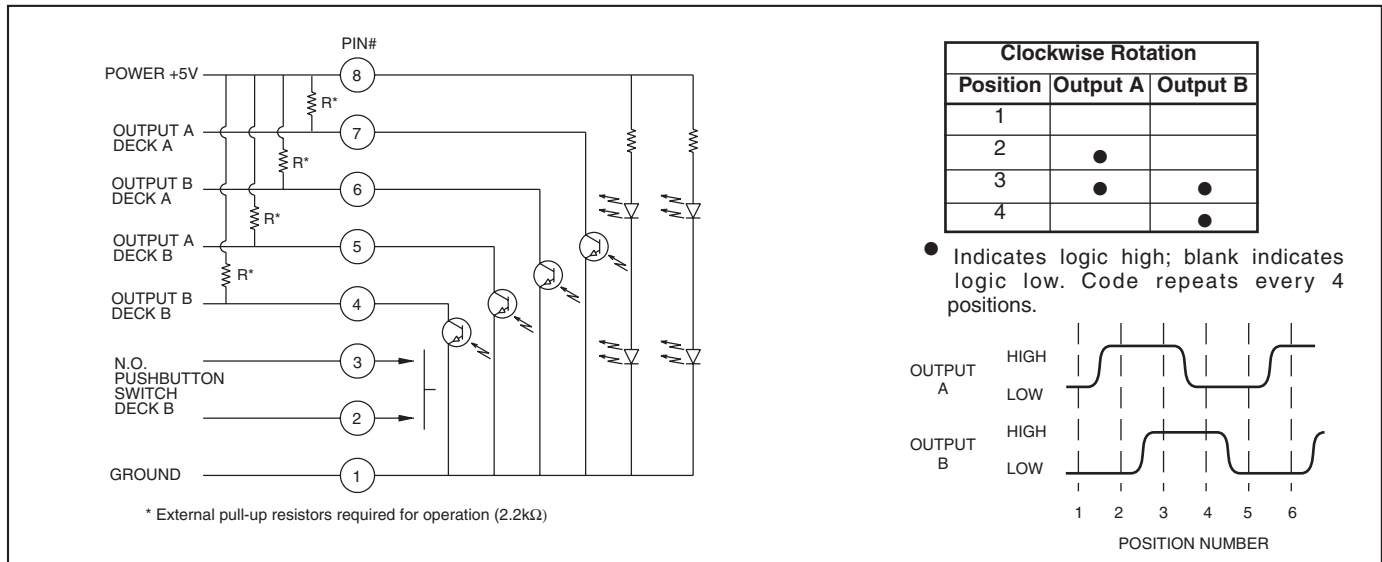

## SPECIFICATIONS

## Pushbutton Switch Ratings

**Rating:** 5 Vdc, 10 mA, resistive  
**Contact Resistance:** less than 10 ohms (TTL or CMOS compatible)  
**Voltage Breakdown:** 250 Vac between mutually insulated parts  
**Contact Bounce:** less than 4 mS at make, less than 10 mS at break  
**Actuation Life:** 3,000,000 operations  
**Actuation Force:** 1000  $\pm$  300 grams  
**Pushbutton Travel:** .010 / .025 inch

## Encoder Ratings

**Coding:** 2-bit quadrature coded output  
**Operating Voltage:** 5  $\pm$  .25 Vdc  
**Supply Current:** 50 mA maximum at 5 Vdc  
**Logic High:** 3.8V minimum  
**Logic Low:** 0.8V maximum  
**Logic Rise and Fall Times:** less than 30 mS  
**Operating Torque:** 2.0 in-oz  $\pm$  1.4 in-oz initially

**Rotational Life:** more than 1,000,000 cycles of operation (1 cycle = 360° rotation and return)  
**Shaft Push Out Force:** 45 lbs minimum  
**Mounting Torque:** 15 in-lbs maximum  
**Operating Speed:** 100 RPM maximum  
**Axial Shaft Play:** .010 maximum for each shaft


## Environmental Ratings

**Operating Temperature Range:** -40°C to 85°C  
**Storage Temperature Range:** -55°C to 100°C  
**Relative Humidity:** 90–95% at 40°C for 96 hours  
**Vibration Resistance:** Harmonic motion with amplitude of 15g, within a varied 10 to 2000 Hz frequency for 12 hours per MIL-STD-202, Method 204  
**Shock Resistance:** Test 1: Tested at 100g for 6 mS, half sine, 12.3 ft/s Test 2: 100g for 6 mS, sawtooth, 9.7 ft/s

## Materials and Finishes

**Bushing:** Zinc casting  
**Shaft:** Aluminum  
**Shaft Retaining Ring:** Stainless steel  
**Detent Spring:** Stainless steel  
**Printed Circuit Board:** NEMA grade FR-4  
**Terminals:** Brass, tin-plated  
**Mounting Hardware:** One brass, nickel-plated nut and stainless steel lockwasher supplied with each switch. (Nut is 0.094 inches thick by 0.433 inches across flats)  
**Rotor:** Thermoplastic  
**Code Housing:** Reinforced thermoplastic  
**Pushbutton Dome:** Stainless steel  
**Pushbutton Housing:** Thermoplastic  
**Pushbutton Contact:** Brass, nickel-plated  
**Dome Retaining Disk:** Thermoplastic  
**Strain Relief:** Stainless steel  
**Cable:** 28 AWG, stranded/top coated wire, PVC coated on .050 centers (cable version only)  
**Header Pins:** Phosphor bronze, tin-plated  
**Insulator:** Glass-filled polyester  
**Spacer:** Zinc casting

## ORDERING INFORMATION

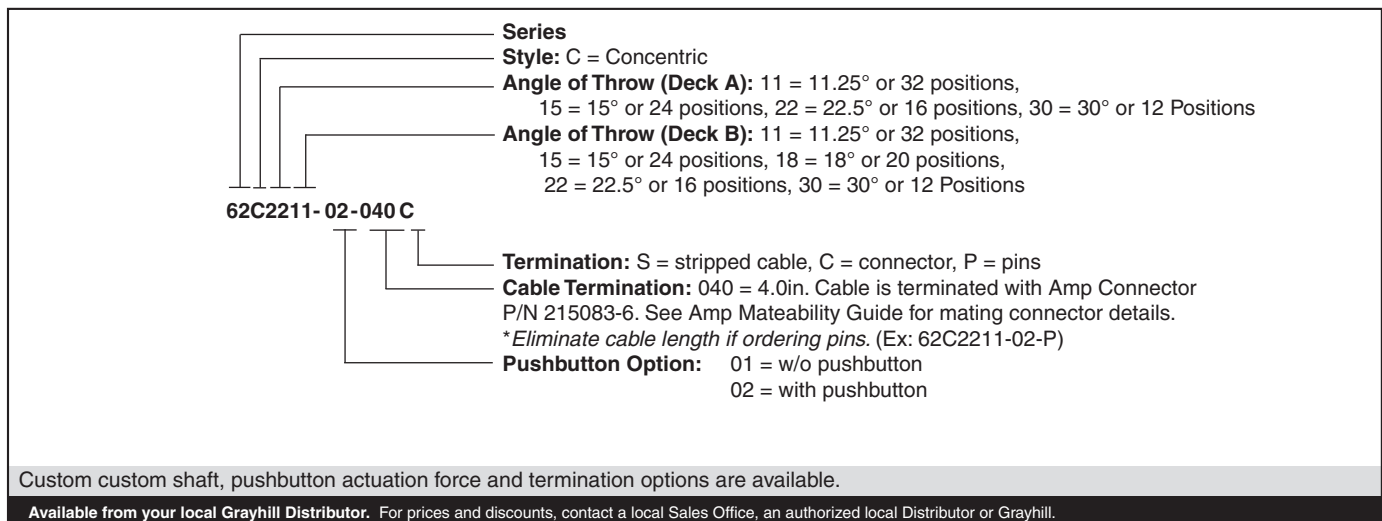



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ