



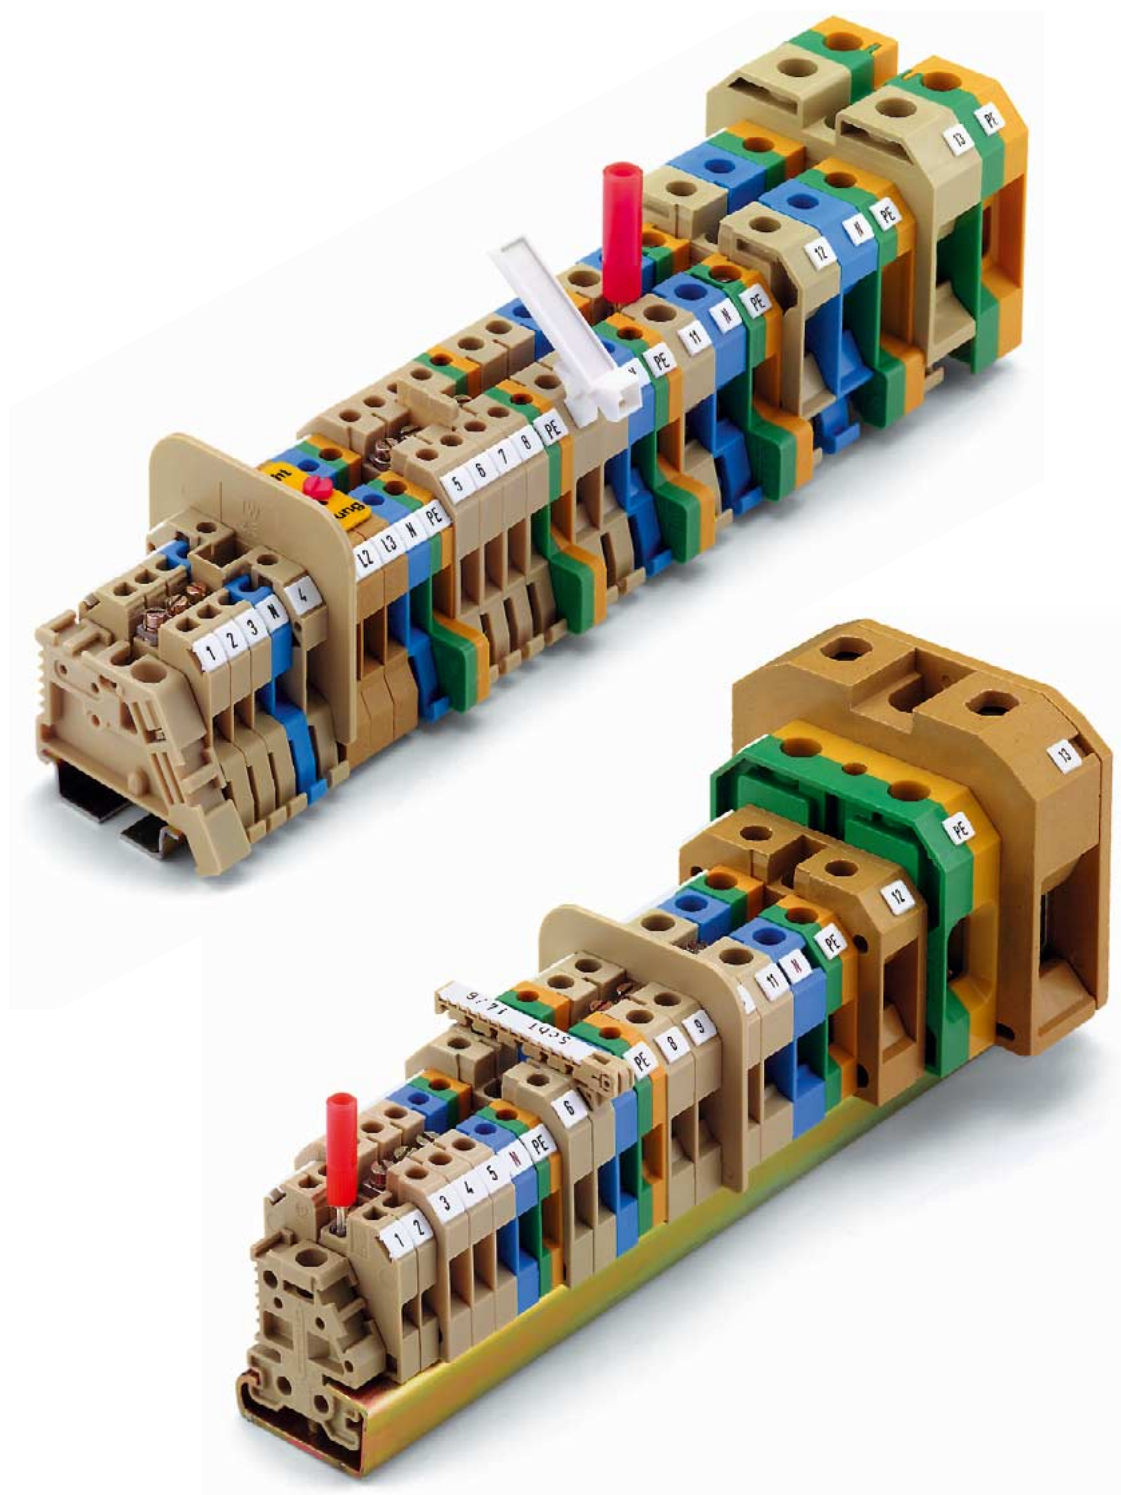

Weidmüller terminal - SAK-series- are proved in millions of applications for more than 50 years.

Available for the two rail systems TS32 and TS35, the SAK terminals are useable for every application and for all cross-sections. SAK terminals fulfill the requirements of EN 60 947-7-1.

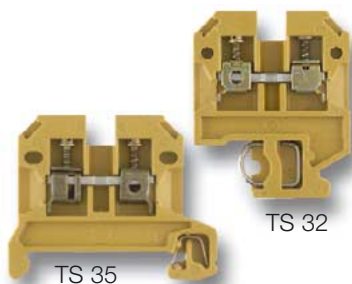


Thermosetting plastic or Thermoplastic


Terminal of thermosetting plastic are normally used in applications where high continuous service temperature and high flammability level are necessary. The Weidmüller thermosetting plastic KRG is very resistant against infection through mould and micro-organisms.

The thermoplastic material Polyamide 66 has very good electrical and mechanical properties upto 100°C. PA66 is flexible and unsusceptible to fracture, even with low temperatures.

Polyamid 66 has improved fire resistance and is self-extinguishing with flammability level V2 according to UL 94.

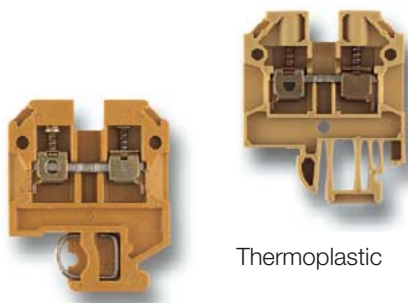

Thermosetting plastic

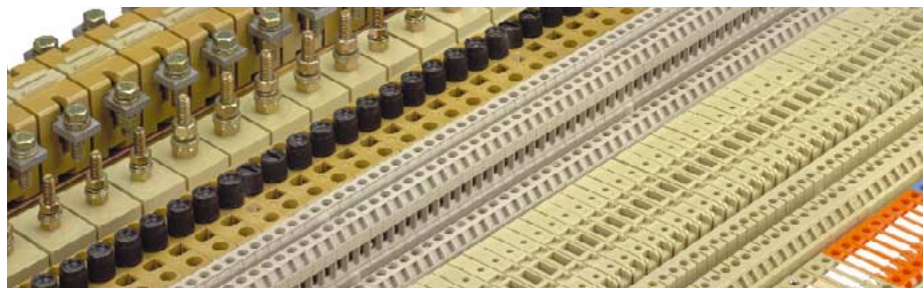


Cross-connection systems

40% of all terminals are cross-connected for potential branching.

Weidmüller distinguishes between the following cross-connection units for SAK-series:

- type Q pre-assembled cross-connections
- type QL permanent cross-connections
- type VL removeable cross-connection straps
- type QS removeable cross-connection plugs

Cross-connection systems from the SAK and AKZ series, type Q, QL or VL or other freely accessible live components, must be protected with appropriate covers ADP 1 or 4 or TSK 31.5 as long as they are to be inserted safe from contact.



Approvals

The following approvals apply to SAK terminals:

UL-USA
CSA-Canada
GOST-Russia
SEV-Switzerland
KEMA-Netherlands
Lloyds Register of Shipping
Germanischer Lloyd
Det Norske Veritas

SAK portfolio

- Feed-through terminals
- Protective conductor terminals
- Fuse terminals
- Disconnect-test terminals
- Feed-through terminals with tab, solder, WireWrap and Termi Point connections
- Initiator terminals, Actuator terminals
- Stud terminals

Accessories



An extensive assortment of accessories is available for Weidmüller SAK terminals:


- Partitions
- Cover plates
- Small partitions
- Test plugs
- Test adapters
- Marking material
- Cross-connections and
- Covers

Positioning of end plates or partitions between cross-connections

Operating voltage	Terminal width (in mm)					
	≤ 6	≤ 8	10	12	18	22
125 V ~	AP	—	—	—	—	—
250 V ~	AP	—	—	—	—	—
380 V ~	AP	AP	—	—	—	—
440 V ~	TW	AP	AP	AP	AP	—
500 V ~	TW	TW	AP	AP	AP	—
660 V ~	TW	TW	TW	TW	TW	AP
750 V ~	TW	TW	TW	TW	TW	AP

In PA terminals small partitions (TSch) have to be used up to 380 V.

Feed-through terminals

		SAKD 2.5 N SAKD 2.5/10/35	SAK 2.5/35 SAK 2.5/10/35	SAK 2.5 SAK 2.5/10	SAK 4/35 SAK 4/10/35		
							
Dimensions/approvals							
Width/length/height (mm)	with TS 32 	5/32.5/43.5		6/36.5/46.5	6.5/40/51.5		
Width/length/height (mm)	with TS 35 x 7.5 	5/44/38	6/45/40		6.5/45/44		
Insulation stripping length/clamping screw/screwdriver blade		10/M 2.5/3.5 x 0.6	10/M 2.5/3.5 x 0.6	10/M 2.5/3.5 x 0.6	12/M 3/3.5 x 0.6		
Rated data according to IEC 60 947-7-1							
Rated voltage/current/cross-section		500 V/24 A/2.5 mm ²	800 V/24 A/2.5 mm ²	800 V/24 A/2.5 mm ² ³⁾	800 V/32 A/4 mm ²		
Rated impulse voltage/pollution severity		6 kV/3	8 kV/3	8 kV/3	8 kV/3		
Further technical data							
Tightening torque range	Nm	0.4...0.6	0.4...0.6	0.4...0.6	0.5...1.0		
Torque setting with electric screwdriver type DMS 2		1	1	1	2		
Clampable conductor							
Solid H07V-U	mm ²	0.5...4	0.5...6	0.5...6	0.5...6		
Stranded H07V-R	mm ²	0.5...2.5	0.5...2.5	0.5...2.5	0.5...4		
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...4	0.5...4		
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5	0.5...2.5/4 ³⁾	0.5...2.5/4 ³⁾	0.5...4		
Plug gauge according to 60 947-7-1	Size	A 2	A 3	A 3	A 4		
Continuous current of terminal for conductor size		30 A/4 mm ²	32 A/4 mm ²	32 A/4 mm ²	41 A/6 mm ²		
Continuous current rating of cross-connection 2...5-pole	A	24	32	32	36		
Continuous current rating of cross-connection 6...10-pole	A	24					
Rated data according to UL/CSA							
Voltage/current/conductor size	UL	300 V/20 A/28...12 AWG	600 V/20 A/22...12 AWG	600 V/20 A/22...12 AWG	600 V/20 A/22...12 AWG		
Voltage/current/conductor size	CSA	300 V/20 A/22...12 AWG	600 V/25 A/26...10 AWG	600 V/25 A/26...10 AWG	600 V/36 A/26...10 AWG		
Ordering data		Version					
			Qty.		Qty.		
		KrG		0380420000	100		
		Blue KrG		0380470000	100		
		KrS			0279630000	100	
		PA	0215560000 100 0268860000 100	0380460000 ¹⁾ 100	0279660000 ¹⁾ 100		
		Blue PA	0215580000 100 0268880000 100	0380480000 ¹⁾ 100	0279680000 ¹⁾ 100		
		Orange PA			1326360000 ¹⁾ 100		
		Terminal block with marking PA	0401060000 10 0523160000 10	0499460000 ¹⁾ 10	0322560000 ¹⁾ 10		
		Terminal block without marking PA	0401160000 10	0499560000 ¹⁾ 10	0322660000 ¹⁾ 10		
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
		KrG			AP (1.5)	0279520000	20
		Blue KrG			AP (1.5)	0279570000	20
		KrS			AP (1.5)	0279530000	20
		PA	AP (1.5) 0150960000	20	AP (1.5)	0460560000	20
		Blue PA	AP (1.5) 0150980000	20	AP (1.5)	0460580000	20
		PA					
		Blue PA					
Partition (thickness mm)							
TW	WTW	KrG			TW (2.5)	0302820000	20
		Blue KrG			TW (2.5)	0302870000	20
		KrS			TW (2.5)	0302830000	20
		PA	TW (1.5) 0191860000	20	TW (1.5)	0302860000	20
		Blue PA	TW (1.5) 0191880000	20	TW (1.5)	0302880000	20
		HP	TW (1.5) 0307500000	20	TW (1.0)	0297100000	20
Small partition							
		TSch 1			TSch 1	0319160000	100
		TSch 3	0366860000	100	TSch 1	0319160000	100
Cross-connection							
Q 4	2-pole	Q 2	0367800000	50	Q 2	0337000000	50
	3-pole	Q 3	0367900000	50	Q 3	0337100000	50
	4-pole	Q 4	0368000000	50	Q 4	0337200000	50
	10-pole	Q 10	0368100000	20	Q 10	0368700000	20
Cover plates							
					AD 4	0303400000	50
					BSKM3x22	0128900000	100
Switchable cross-connection link							
VL 2	BS	VH					
Marking tags							
		DEK	Standard	DEK 5	see "Accessories"	DEK 6	see "Accessories"
		DEK	Standard	DEK 5	see "Accessories"	DEK 6	see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"							


¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")

²⁾ Not suitable for SST 3 safety pin

³⁾ Cat. No. 0279660000, 0279680000, 0380460000 and 0380480000, 41 A for 6 mm²

Feed-through terminals


SAK 4 SAK 4/10



DK 4 Q* DKB4 Q*/10*



DK 4 DK4/35



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	
Rated impulse voltage/pollution severity	

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

Clampable conductor

Solid H07V-U	mm²
Stranded H07V-R	mm²
Flexible H07V-K	mm²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm²
With/without plastic insulating collar	mm²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2...5-pole	A
Continuous current rating of cross-connection 6...10-pole	A

Technical data

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾ 2)100	
Blue PA	0128380000 ¹⁾ 2)100	
Orange PA	0105060000 ¹⁾ 2)100	
Terminal block with marking PA	0322660000 ¹⁾ 2) 10	
Terminal block without marking PA	0308860000 ¹⁾ 2) 10	

End plate (thickness mm)



Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)



KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition



TSch 1	0319160000	100
--------	------------	-----

Cross-connection




Q 2	0336700000	50
Q 3	0336800000	50
Q 4	0336900000	50
Q 10	0368800000	20
2-pole		
3-pole		
4-pole		

Switchable cross-connection link



VL 2	0197000000	100
VH	0285100000	50
BS	0292500000	100

Marking tags



DEK	Standard
DEK6.5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. 1056400000

** 2.5 mm² conductor connection when using QB

Dimensions/approvals

Width/length/height (mm)	6/54/60
Width/length/height (mm)	6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	9/M 3/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/2 x 32 A/4 mm²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm²
Stranded H07V-R	mm²
Flexible H07V-K	mm²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm²
With/without plastic insulating collar	mm²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2...5-pole	A </td
Continuous current rating of cross-connection 6...10-pole	A </td

Technical data

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA


Ordering data

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾ 2)100	
Blue PA	0128380000 ¹⁾ 2)100	
Orange PA	0105060000 ¹⁾ 2)100	
Terminal block with marking PA	0322660000 ¹⁾ 2) 10	
Terminal block without marking PA	0308860000 ¹⁾ 2) 10	

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)



KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition




TSch 1	0319160000	100
--------	------------	-----

Cross-connection

Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20
QB 2	0482700000**100	
QB 3	0482800000** 50	
QB 4	0482900000** 50	

Switchable cross-connection link



VL 2	0446700000	50
VH	1056500000	100
BS	0343100000	100

Marking tags

DEK	Standard
DEK6	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. 1056400000


** 2.5 mm² conductor connection when using QB

Feed-through terminals

DK4 QV*
DK4 QV/35*




SAK 6 N
SAK 6/10/35



SAK 10
SAK 10/10/35



SAK 16
SAK 16/35



Dimensions/approvals																		
Width/length/height (mm) with TS 32		6/54/60		8/40/51.5		10/40/51.5		12/50/57.5										
Width/length/height (mm) with TS 35 x 7.5		6/54/60.5		8/45/44		10/45/44		12/50/50										
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6		12 mm/M 3.5/4.0 x 0.8		12 mm/M 4/5.5 x 1.0		15 mm/M 4/5.5 x 1.0										
Rated data according to IEC 60 947-7-1																		
Rated voltage/current/cross-section		500 V/32 A/4 mm ²		800 V/41 A/6 mm ²		800 V/57 A/10 mm ²		1000 V/76 A/16 mm ²										
Rated impulse voltage/pollution severity		6 kV/3		8 kV/3		8 kV/3		8 kV/3										
Further technical data																		
Tightening torque range Nm		0.5...1.0		0.8...1.6		1.2...2.0 ³⁾		1.2...2.4										
Torque setting with electric screwdriver type DMS 2		2		3		4		4										
Clampable conductor																		
Solid H07V-U mm ²		0.5...4		0.5...10		1.5...10		2.5...10										
Stranded H07V-R mm ²		0.5...4		0.5...6		2.5...16		4...16 ²⁾										
Flexible H07V-K mm ²		0.5...4		0.5...10		1.5...10		4...16										
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²																		
With/without plastic insulating collar mm ²		0.5...4		0.5...6		1.5...10		4...16										
Plug gauge according to 60 947-7-1 Size		A 3		A 5		B 6		B 6										
Continuous current of terminal for conductor size		32 A/4 mm ²				76 A/16 mm ²												
Continuous current rating of cross-connection 2...5-pole A		32		41		57		76										
Continuous current rating of cross-connection 6...10-pole A		32																
Rated data according to UL/CSA																		
Voltage/current/conductor size UL		300 V/27 A/22...12 AWG		600 V/40 A/22...8 AWG		600 V/60 A/14...6 AWG ³⁾		600 V/80 A/12...4 AWG										
Voltage/current/conductor size CSA		300 V/10 A/26...12 AWG		600 V/47 A/20...8 AWG		600 V/65 A/14...6 AWG ³⁾		600 V/87 A/10...4 AWG										
Ordering data		Version	Qty.	Qty.	Qty.	Qty.	Qty.	Qty.	Qty.									
		KrG			0193220000	100	0380520000	100	0110020000	100	0443720000	100	0271020000	50	0380620000	50		
		Blue KrG					0380570000	100	0110070000	100	0443770000	100						
		KrS			0193230000	100			0110030000	100			0271030000	50				
		PA	0590260000 ¹⁾	100	0363660000 ¹⁾	100	0193260000 ¹⁾	100	0380560000 ¹⁾	100	0110060000 ¹⁾	100	0443760000 ¹⁾	100	0271060000 ¹⁾	50	0380660000 ¹⁾	50
		Blue PA	0590280000 ¹⁾	100	0363680000 ¹⁾	100	0193280000 ¹⁾	100	0380580000 ¹⁾	100	0110080000 ¹⁾	100	0443780000 ¹⁾	100	0271080000 ¹⁾	50	0380680000 ¹⁾	50
		Orange PA																
	Terminal block with marking				0322760000 ¹⁾	10			0553860000 ¹⁾	10								
	Terminal block without marking				0308960000 ¹⁾	10			0353160000 ¹⁾	10								
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
AP		KrG			AP (1.5)	0117920000	20	AP (1.5)	0117920000	20	AP (3.0)	0271120000	20					
		Blue KrG			AP (1.5)	0117970000	20	AP (1.5)	0117970000	20								
		KrS			AP (1.5)	0117930000	20	AP (1.5)	0117930000	20	AP (3.0)	0271130000	20					
		PA	AP (1.5)	1397160000	20	AP (1.5)	0117960000	20	AP (1.5)	0117960000	20	AP (1.5)	0271160000	20				
		Blue PA	AP (1.5)	1397180000	20	AP (1.5)	0117980000	20	AP (1.5)	0117980000	20	AP (1.5)	0271180000	20				
Partition (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
TW		KrG			TW (1.5)	0130120000	20	TW (1.5)	0130120000	20	TW (3.0)	0281120000	20					
		Blue KrG						TW (1.5)	0130170000	20								
		KrS			TW (1.5)	0130130000	20	TW (1.5)	0130130000	20	TW (3.0)	0281130000	20					
		PA	WTW (Ex)	1058800000	20	TW (1.5)	0130160000	20	TW (1.5)	0130160000	20	TW (1.5)	0303660000	10				
		Blue PA			TW (1.5)	0130180000	20	TW (1.5)	0130180000	20	TW (1.5)	0303680000	10					
		TSch 6	TW (2.0)	0607000000	20	TW (1.5)	0197100000	20	TW (1.5)	0197100000	20	TW (2.0)	0607000000	20				
		TSch 6		0190260000	100	TSch 1	0319160000	100	TSch 1	0319160000	100	TSch 1	0319160000	100				
Cross-connection		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
Q 4		2-pole	Q 2	0336400000	50	Q 2	0456700000	50	Q 2	0457100000	50	Q 2	0457500000	50				
		3-pole	Q 3	0336500000	50	Q 3	0456800000	50	Q 3	0457200000	50	Q 3	0457600000	50				
		4-pole	Q 4	0336600000	50	Q 4	0456900000	50	Q 4	0457300000	50	Q 4	0457700000	50				
		10-pole	Q 10	0368600000	20	Q 10	0457000000	20	Q 10	0457400000	20	Q 10	0457800000	20				
			QB 2	0482700000 **	100													
			QB 3	0482800000 **	50													
			QB 4	0482900000 **	50													
Cover		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
		AD 4	0303400000	50	AD 4	0196600000	50	AD 4	0178600000	50	AD 4	0518200000	50					
		BSK M 2.5 x18			BSKM3x22	0128900000	100	BSKM3x22	0128900000	100	BSKM3x22	0128900000	100					
			0303300000	100														
Switchable cross-connection link		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
VL 2		VL 2	04467000000	50	VL 2	0194700000	50	VL 2	0135900000	50	VL 2	0135800000	50					
BS		VH	10565000000	100	VH	0285100000	50	VH	0285100000	50	VH	0285100000	50					
VH		BS	03431000000	100	BS	0292500000	100	BS	0292500000	100	BS	0292500000	100					
Marking tags		Print																
	1	DEK	Standard	DEK 6	see "Accessories"	DEK 8	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"					
	2																	
	3																	
	4																	
	5																	
	6																	
Mounting rails, end brackets, further marking material see "Accessories"																		

* Accepts LS 2.8 shield lugs Cat. No.**1056400000**

** 2.5 mm² conductor connection when using QB

1) Contact-proof with ADP 4 cover profile (see section "Accessories")

2) Tightening torque for 16 mm² stranded: 2 Nm

3) Tightening torque for 16 mm² and AWG6: 2 Nm

* Accepts LS 2.8 shield lugs Cat. No. **1056400000**
** 2.5 mm² conductor connection when using QB

¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")

²⁾ Tightening torque for 16 mm² stranded: 2 Nm

³⁾ Tightening torque for 16 mm² and AWG6: 2 Nm

Feed-through terminals

		SAK 35 N SAK 35 N/35	SAK 35 SAK 35/35	SAK 70 SAK 70/35	SAK 95 SAK 95/35								
													
Dimensions/approvals		    DNV	      DNV	     DNV	   DNV								
Width/length/height (mm)		with TS 32 	16/58/67.5	22/75/79.5	28/83.5/100.5								
Width/length/height (mm)		with TS 35 x 7.5 	16/63/60	22/75/87	28/83.5/96.5								
Insulation stripping length/clamping screw/screwdriver blade		18 mm/M 6/6.5 x 1.2	20 mm/M 6/6.5 x 1.2	24 mm/M 8/8.5 D911	30 mm/M 10/8 S D6911								
Rated data according to IEC 60 947-7-1													
Rated voltage/current/cross-section		1000 V/125 A/35 mm ²	800 V/125 A/35 mm ²	1000 V/192 A/70 mm ²	1000 V/232 A/95 mm ²								
Rated impulse voltage/pollution severity		8 kV/3	8 kV/3	8 kV/3	8 kV/3								
Further technical data													
Tightening torque range		Nm	4.0...5.0/4.0...6.0***	6.0...12.0	10.0...20.0								
Torque setting with electric screwdriver type DMS 2													
Clampable conductor				Strips	Strips								
Solid H07V-U		mm ²	2.5...16	16	10...16								
Stranded H07V-R		mm ²	2.5...50	16...70 ¹⁾	10...120 ²⁾								
Flexible H07V-K		mm ²	2.5...35	10...35	10...95 ²⁾								
Flexible H07V-K and ferrule according to DIN 46 228/1		mm ²	2.5...35	10...35	10...35								
Plug gauge according to 60 947-7-1		Size	B 8	B 9	B 12								
Continuous current of terminal for conductor size			125 A/35 mm ²	125 A/35 mm ²	232 A/95 mm ²								
Continuous current rating of cross-connection 2...5-pole		A	65	99	180								
Continuous current rating of cross-connection 6...10-pole		A	65	99	180								
Rated data according to UL/CSA													
Voltage/current/conductor size		UL	600 V/100 A/12...2 AWG	600 V/100 A/6...2 AWG	600 V/190 A/6...3/0 AWG								
Voltage/current/conductor size		CSA	600 V/120 A/12...2 AWG	600 V/145 A/6...2 AWG	600 V/260 A/6...3/0 AWG								
Ordering data		Version	 Qty. 	 VPE  Qty.	 Qty. 								
		KrG	0550620000 ²⁰ 0608220000 ²⁰	0303520000 ²⁰									
		Hexagon socket KrG	0555720000 ²⁰ 0608320000 ²⁰	0476520000 ²⁰	0340820000 ¹⁰								
		Hexagon socket Blue KrG	0608370000 ²⁰		0340870000 ¹⁰								
		KrS	0550630000 ²⁰	0303530000 ²⁰									
		Hexagon socket KrS	0555730000 ²⁰		0340830000 ¹⁰								
		PA	0550660000 ²⁰ 0608260000 ²⁰	0303560000 ²⁰ 0380760000 ²⁰									
		Hexagon socket PA	0555760000 ²⁰ 0608360000 ²⁰	0476560000 ²⁰ 0582460000 ²⁰	0139160000 ¹⁰								
		Blue PA		0303580000 ²⁰ 0380780000 ²⁰									
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.			
		KrG	AP (3.0)	0303620000	10	AP (3.0)	0303620000	10	AP (3.0)	0550920000	10		
		Blue KrG	AP (3.0)	0303670000	10	AP (3.0)	0303670000	10	AP (3.0)	0550970000	10		
		KrS	AP (3.0)	0303630000	10	AP (3.0)	0303630000	10					
		PA	AP (1.5)	0303660000	10	AP (1.5)	0303660000	10					
		Blue PA	AP (3.0)	0303680000	10	AP (3.0)	0303680000	10					
		Orange PA											
Partition (thickness mm)													
		KrG	TW (3.0)	0304320000	10	TW (3.0)	0304320000	10					
		Blue KrG											
		KrS	TW (3.0)	0304330000	10	TW (3.0)	0304330000	10					
		PA	TW (1.5)	0304360000	10	TW (1.5)	0304360000	10					
		Blue PA											
Cross-connection													
QL 3	VH	BS	SS	2-pole	QL 2	0123600000	20	QL 2	0345300000	20	QL 2	0551200000	10
				3-pole	QL 3	0123700000	20	QL 3	0167000000	20	QL 3	0407600000	10
				4-pole	QL 4	0123800000	20				QL 4	0407700000	10
				10-pole	QL 10	0338600000	20						
					VH 17	0267000000	50	VH 30.5	0345500000	20	VH 35	0551100000	10
					BS M 4x30	0267100000	50	BS M 5x45	0345600000	20	BS M 5x50	0630200000	20
					SS M 4	0136400000	100	SS M 5	0346100000	100			
Switchable cross-connection link													
VL 2	BS	VH			VL 2	0124000000	50						
					VH 24.5	0298700000	50						
					BS M 4x35	0298900000	50						
Cover / test plug													
					AD 4	0178700000	20	AD 3	0344300000	10	ADP 3	0485400000	20
					BSK M 4x32	0129100000	50	BSK M 5x45	0344400000	50			
					PS 4	0299600000	20	PS 4	0299600000	20	PS 4	0299600000	20
Marking tags													
					DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 5	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"													

SAK-series

Feed-through terminals (spring-loaded)

RSF 3 RSF 3/35




RSF 1



RSF 2

Disconnect test terminal



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data

Rated voltage/-current	630 V/32 A
Rated cross-section	mm ² 4
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm ² 0.5...4
Stranded H07V-R	mm ² 0.5...4

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Version

	Qty.	Qty.
PA	0497560000 50	9501160000 50
KrG	0497520000 50	



	Qty.	Qty.
	0270320000 50	

End plate/partition/small partition

AP	TW	TSch 1	PA	Type	Cat. No.	Qty.
			PA	AP (3)	0270460000	10
			KrG	TW (1.5)	3877960000	10
			HP	TW (2)	3833500000	20
			HP	TW (0.5)	0474700000	20
			PA	TSch 1	0319160000	100

Cross-connection

QL	VH	SS	2-pole	QL 2	0194300000 50
			3-pole	QL 3	0194400000 50
			4-pole	QL 4	0194500000 50
			10-pole	QL 10	0338300000 10
				VH 13.5	0248500000 100

BS M 3 x ...



BS M 3x20 0303000000 100

BS M 3x25 0292500000 100

SS 0164400000 50

QS 4 0369760000 10

BS M 4x6 0149700000 100

SB 14 0135300000 100

Switchable cross-connection link

VH 21	VH 2	0194700000 50
	VH 21	0309600000 100
	BS M 3x20	0296200000 50
	SS	0164400000 50

VH 2 0528400000 50

VH 27 0309400000 50

BS M 3x25 0309800000 50

SS 0164400000 50

Dummy plug



made from plastic,
to keep the place of an
extracted plug

Test plug/socket

PS	PS 2.3	0180400000 50
	StB 14	0168600000 50

PS 2.4 0299600000 20

StB 18 0286500000 20

PS 4 0299600000 20

StB 17 0147100000 50

StB

Plug-testsocket (QL cannot be used)

Cover plate

ADP 2 0485300000 1

ADP 2 0485300000 1

Marking tags

Print	Standard
	DEK see "Accessories"

Print

DEK see "Accessories"

* with disconnecter (73 mm height)


** Disconnecter with handle (86 mm height)

Feed-through terminals for thermocouples

Busbars made from thermocouple materials according to DIN IEC 584

SAK 2.5 TC


DK 4 Q/TC



Weidmüller's **thermocouple-terminals** are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path.

This high measuring precision is necessary for, e.g. test beds, air craft engines, for complicated chemical processes, controls, etc.

I. Configuration of a temperature measuring circuit



- 1 Thermocouple (sensor) 4 Reference point
2 Thermocouple terminals 5 Supply conductors (to and from)
3 Compensation conductor 6 Measuring device

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device via the thermocouple.

Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Technical data/VDE

Rated voltage/current/cross-section

Tightening torque range

Nm

6/36.5/49.5

10 mm/M 2.5/3.5 x 0.6

-/-/2.5 mm²

0.4...0.6

6/54/59.5

6/54/60.5

9 mm/M 3/3.5 x 0.6

-/-/4 mm²

0.5...1

Ordering data

Version Type

NiCr

Ni

CuNi

Fe

Cu

NiCr/Ni

Cu/CuNi

Fe/CuNi

Cat. No.

Qty.

0107260000

100

0107160000

100

0189860000

100

0190060000

100

0189960000

100

1284160000

1338260000

100

1285660000

1338160000

100

1284060000

1338060000

100

End plate (thickness mm)



KrG

Blue KrG

KrS

PA

Blue PA

Orange PA

Type

Cat. No.

Qty.

AP (1.5)

0279560000

20

AP (1.5)

1397160000

20

Partition (thickness mm)



KrG

Blue KrG

KrS

PA

Blue PA

Orange PA

Type

Cat. No.

Qty.

TW (1.5)

0302860000

20

TW (Ex)e

1058800000

20

TW HP (2.0)

0607000000


20

II. Symbols

Thermocouples according to IEC 584 DIN 43710

Terminal	Busbar material trade name
a) Type J	
Fe (positive leg)	Iron
CuNi (negative leg)	Constantan
b) Type T	
Cu (positive leg)	Copper
CuNi (negative leg)	Constantan
c) Type K	
NiCr (positive leg)	Chromel
Ni (negative leg)	Alumel

Marking tags



DEK

Print

Standard

DEK 6

see "Accessories"

DEK 6

see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series

Feed-through terminals

Terminals/Accessories

SAKG 28 I


SAKG 28 II




The Weidmüller SAKG range offers the following connection variants:

- clamping yoke/flat lug as a combination, Version I.
- flat lug, Version II.
Two types of threading are provided here.
a) screw set with lock nut
b) with thread in busbar
- clamping yoke connection, Version III.
The stripped conductor can be connected without further preparation.

Versions




Version I



Version II
without thread



Version II G
with thread




Version III

Cables with cable lugs are connected to SAKG terminals of Version I and to SS stud terminals.

Fitting instructions for SAKG terminals

When tightening the clamping screw, it is recommended that the conductor be held against the direction of tightening to prevent deformation of the mounting rail and so as not to place the terminal foot under undue torsional forces.

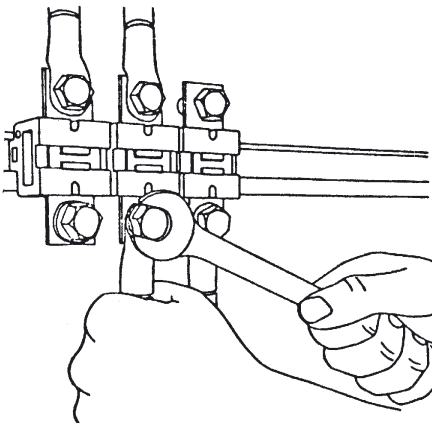

Cover

To ensure shock protection following connections of **conductors**, AH covers can be clipped onto the terminal.

Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35
Insulation stripping length/clamping screw/screwdriver blade	

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	
Rated impulse voltage/pollution severity	

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

Clampable conductor

Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2...5-pole	A
Continuous current rating of cross-connection 6...10-pole	A

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Type	KrG
------	-----



28/70/63.5

15 mm/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

6...35

6...35

10...35

6...35

B 9

125 A/35 mm²

(QL 2) 125

600 V/95 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No. Qty.

0170020000 10



28/70/53

-/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

6...35

6...35

10...35

6...35

B 9

125 A/35 mm²

(QL 2) 125

600 V/115 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No. Qty.

0170320000 10

End plate, hard paper

0205100000	
0205200000	tropic-proof



0180700000, 0205300000

0180800000, 0205400000 tropic-proof



Partition, hard paper (thickness in mm)

0151400000	
0164600000	tropic-proof



0177100000	B/L/H (incl. TS 32) mm
0179900000	B/L/H (incl. TS 35) mm



Cross-connection

2-pole	QL 2	0193900000	5
3-pole	QL 3	0407600000	5
4-pole	QL 4	0407700000	5



Cover

AH 28	0326660000	5
-------	------------	---



Marking tags

1	2	3	4	5	6	DEK	Standard
---	---	---	---	---	---	-----	----------

Mounting rails, end brackets, further marking material see "Accessories"

During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 28 II G



28/70/53
-/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
125 A/35 mm ²
(QL 2) 125

	Cat. No.	Qty.
	0185020000	10

	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

	Cat. No.	Qty.

	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120/75.5

QL 2	0193900000	5
QL 3	0407600000	5
QL 4	0407700000	5

AH 28	0326660000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 28 III



28/70/63.5
15 mm/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
6...35
6...35
10...35
6...35
B 9
125 A/35 mm ²

600 V/95 A/2 AWG		
600 V/135 A/8...2 AWG		
	Cat. No.	Qty
	0170820000	10

	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

	Cat. No.	Qty.

	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 28	0326660000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 I SAKG 32/35 I



32/87/84
32/87/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²
(QL 2) 150

600 V/165 A/3 AWG			
600 V/170 A/1...2/0 AWG			
	Qty.		Qty.
0286620000	0637120000	10	

	Cat. No.	Qty.
EP 1 (2)	0205300000	10
EP 1 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Cat. No.	Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II SAKG 32/35 II



32/80/53
32/80/51
-/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
150 A/50 mm ²
(QL 2) 150

600 V/200 A/3 AWG			
600 V/170 A/1...2/0 AWG			
	Qty.		Qty.
0170420000	10	0637320000	10

	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

	Cat. No.	Qty.
EP 1/35 (2)	0180700000	10
EP 1/35 (2)	0180600000	10

	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II G SAKG 32/35 II G



32/80/53
32/80/53
-/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
150 A/50 mm ²
(QL 2) 150

600 V/170 A/1...2/0 AWG			
			Qty.
0185120000		10	0637420000

	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

	Cat. No.	Qty.
EP 1/35 (2)	0180700000	10
EP 1/35 (2)	0180600000	10

	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10


2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 III SAKG 32/35 III



32/94/84
32/94/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²

600 V/165 A/3 AWG			
600 V/185 A/1...2/0 AWG			
	Qty.		Qty.
0286720000	10	0637220000	1

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Cat. No.	Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5





































AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAK-series

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary
** For Cat. No. **0180600000** and **0180700000**: length = 160 mm.

Feed-through terminals

	SAKG 70 II G SAKG 70/35 II G	SAKG 40 I SAKG 40/35 I	SAKG 40 II SAKG 40/35 II	SAKG 40 II G SAKG 40/35 II G
				
Dimensions/approvals	 DNV		 DNV	
Width/length/height (mm) with TS 32	32/84/54	40/95/84	40/90/53	40/90/55
Width/length/height (mm) with TS 35 x 7.5	32/84/53	46/95/85.5	46/90/53	46/90/55
Insulation stripping length/clamping screw/screwdriver blade	~M 8/-	27 mm/M 10/-	~M 10/-	~M 10/-
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section	1000 V*/192 A/70 mm ²	1000 V*/232 A/95 mm ²	1000 V*/232 A/95 mm ²	1000 V*/232 A/95 mm ²
Rated impulse voltage/pollution severity	8 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data				
Tightening torque range Nm	6...12	10...20	10...20	10...20
Torque setting with electric screwdriver type DMS 2				
Clampable conductor				
Solid H07V-U mm ²		10...95		
Stranded H07V-R mm ²		10...95		
Flexible H07V-K mm ²		10...95		
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²		10...35		
Plug gauge according to 60 947-7-1 Size		B 12		
Continuous current of terminal for conductor size	192 A/90 mm ²	232 A/95 mm ²	232 A/95 mm ²	232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole A	(QL 2) 192	(QL 2) 232	(QL 2) 232	(QL 2) 232
Continuous current rating of cross-connection 6...10-pole A				
Rated data according to UL/CSA				
Voltage/current/conductor size UL		600 V/195 A/4/0 AWG	600 V/230 A/4/0 AWG	600 V/230 A/4/0 AWG
Voltage/current/conductor size CSA	600 V/200 A/2/0...4/0 AWG	600 V/250 A/2/0...4/0 AWG	600 V/250 A/2/0...4/0 AWG	600 V/250 A/2/0...4/0 AWG
Ordering data Version				
KrG	 Cat. No. Qty. 0150420000 10 0636620000 10	 Cat. No. Qty. 0286820000 10 0637520000 5	 Cat. No. Qty. 0170520000 10 0637720000 5	 Cat. No. Qty. 0185220000 10 0637820000 5
End plate, hard paper (thickness mm)				
 0205100000 , 0180500000	 Cat. No. Qty. EP 1 (2) 0205100000 10	 Cat. No. Qty. EP 2 (2) 0205300000 10	 Cat. No. Qty. EP 2 (2) 0205300000 10	 Cat. No. Qty. EP 2 (2) 0205300000 10
 0205200000 , 0180600000 tropic-proof	 Cat. No. Qty. EP 1 (2) 0205200000 10	 Cat. No. Qty. EP 2 (2) 0205400000 10	 Cat. No. Qty. EP 2 (2) 0205400000 10	 Cat. No. Qty. EP 2 (2) 0205400000 10
Partition, hard paper (thickness mm)				
 0180700000 , 0205300000	 Cat. No. Qty. EP 1/35 (2) 0180500000 10	 Cat. No. Qty. EP 2/35 (2) 0180700000 10	 Cat. No. Qty. EP 2/35 (2) 0180700000 10	 Cat. No. Qty. EP 2/35 (2) 0180700000 10
 0180800000 , 0205400000 tropic-proof	 Cat. No. Qty. EP 1/35 (2) 0180600000 10	 Cat. No. Qty. EP 2/35 (2) 0180800000 10	 Cat. No. Qty. EP 2/35 (2) 0180800000 10	 Cat. No. Qty. EP 2/35 (2) 0180800000 10
Partition, hard paper (thickness mm)				
 0151400000	 Cat. No. Qty. TW 1 (2) 0151400000 10	 Cat. No. Qty. TW 2 (2) 0177100000 10	 Cat. No. Qty. TW 2 (2) 0177100000 10	 Cat. No. Qty. TW 2 (2) 0177100000 10
 0164600000 tropic-proof	 Cat. No. Qty. TW 1 (2) 0164600000 10	 Cat. No. Qty. TW 2 (2) 0179900000 10	 Cat. No. Qty. TW 2 (2) 0179900000 10	 Cat. No. Qty. TW 2 (2) 0179900000 10
 0177100000 B/L/H (incl. TS 32) mm	 Cat. No. Qty. 2/120/75.5	 Cat. No. Qty. 2/160/90.5	 Cat. No. Qty. 2/160/90.5	 Cat. No. Qty. 2/160/90.5
 0179900000 B/L/H (incl. TS 35) mm	 Cat. No. Qty. 2/120/75.5	 Cat. No. Qty. 2/160/90.5	 Cat. No. Qty. 2/160/90.5	 Cat. No. Qty. 2/160/90.5
Cross-connection				
 2-pole, QL 2	 Cat. No. Qty. 0194000000 10	 Cat. No. Qty. 0194100000 10 0211400000 10	 Cat. No. Qty. 0194100000 10 0211400000 10	 Cat. No. Qty. 0194100000 10 0211400000 10
 3-pole, QL 3	 Cat. No. Qty. 0441500000 10	 Cat. No. Qty. 0263500000 10 0444900000 10	 Cat. No. Qty. 0263500000 10 0444900000 10	 Cat. No. Qty. 0263500000 10 0444900000 10
 4-pole, QL 4	 Cat. No. Qty. 0441600000 10	 Cat. No. Qty. 0409800000 10 0445000000 10	 Cat. No. Qty. 0409800000 10 0445000000 10	 Cat. No. Qty. 0409800000 10 0445000000 10
Cover				
 AH 32	 Cat. No. Qty. 0326760000 5	 Cat. No. Qty. 0326860000 5	 Cat. No. Qty. 0326860000 5	 Cat. No. Qty. 0326860000 5
Marking tags				
 1 2 3 4 5 6 DEK Standard	 Cat. No. Qty. DEK 5 see "Accessories"	 Cat. No. Qty. DEK 5 see "Accessories"	 Cat. No. Qty. DEK 5 see "Accessories"	 Cat. No. Qty. DEK 5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"				

*During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 40 III
SAKG 40/35 III



UL CE DNV
40/100/84
46/100/85.5
27 mm/M 10/-
1000 V*/232 A/95 mm ²
8 kV/3
10...20
10...95
10...95
10...95
10...35
B 12
232 A/95 mm ²

600 V/195 A/4/0 AWG
600 V/230 A/2/0...4/0 AWG
Qty. Qty.
0286920000 10 0637620000 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

AH 40	0326860000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II
SAKG 46/35 II



UL CE DNV
46/106/55
46/106/54.5
-/M 12/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31
309 A/150 mm ²

600 V/285 A/4/0 AWG
600 V/365 A/300 MCM
Qty. Qty.
0170620000 10 0637920000 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II G
SAKG 46/35 II G



CE DNV
46/106/57.5
46/106/57
-/M 12/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31
309 A/150 mm ²
(QL 2) 309

600 V/285 A/4/0 AWG
600 V/365 A/300 MCM
Qty. Qty.
0185320000 10 0638020000 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10


2/160/90.5
2/160/90.5

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II
SAKG 54/35 II



UL CE DNV
54/122/57
54/122/57
-/M 16/-
1000 V*/415 A/240 mm ²
8 kV/3
25...60
415 A/240 mm ²
(QL 2) 415

600 V/380 A/500 MCM
600 V/600 A/300...500 MCM
Qty. Qty.
0170720000 10 0638120000 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10


2/160/90.5
2/160/90.5

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

--

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II G
SAKG 54/35 II G



UL CE DNV
54/122/60
54/122/60
-/M 16/-
1000 V*/415 A/240 mm ²
8 kV/3
25...60
415 A/240 mm ²
(QL 2) 415

600 V/380 A/500 MCM
600 V/600 A/300...500 MCM
Qty. Qty.
0185420000 10 0638220000 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10


2/160/90.5
2/160/90.5

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

--

DEK 5	see "Accessories"
-------	-------------------

SAKG 46/I AL
SAKG 46/II AL



46/112/74
23 mm/M 12/M 14/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31/25...40
50...240
35...185

Qty. Qty.
1287920000** 5

EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

Cat. No. Qty.

Qty. Qty.

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 46	0326960000	5
-------	------------	---



DEK 5	see "Accessories"
-------	-------------------

SAK-series

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.
** Suitable for connection of 1 aluminium conductor of max 185 mm²

*** Suitable for connection of 2 aluminium conductors of max. 185 mm²

Stud terminals

			SS 6 SS 6/35	KST 5 KST 5/35	KST 6 KST 6/35	KST 8 KST 8/35
						
Dimensions/approvals						
Width/length/height (mm)	with TS 32		18/40/62	24/60/55	24/60/62	24/60/72
Width/length/height (mm)	with TS 35 x 7.5		18/49.5/54.5	24/62.5/49.5	24/62.5/54.5	24/62.5/64.5
Insulation stripping length/clamping screw/screwdriver blade			-/M 6/-	-/M 5/-	-/M 6/-	-/M 8/-
Rated data						
Rated voltage/current/cross-section			1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /57 A/10 mm ²	1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /125 A/35 mm ²
Rated impulse voltage/pollution severity			6 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data						
Tightening torque range			Nm 3...6	2...4	3...6	6...12
Torque setting with electric screwdriver type DMS 2						
Clampable conductor						
Solid H07V-U			mm ²			
Stranded H07V-R			mm ²			
Flexible H07V-K			mm ²			
Flexible H07V-K and ferrule according to DIN 46 228/1			mm ²			
Plug gauge according to 60 947-7-1			Size			
Continuous current of terminal for conductor size			82 A/16 mm ²	65 A/10 mm ²	82 A/16 mm ²	135 A/35 mm ²
Continuous current rating of cross-connection 2...5-pole			A		200	200
Continuous current rating of cross-connection 6...10-pole			A			
Rated data according to UL/CSA						
Voltage/current/conductor size			UL 600 V/85 A/12...4 AWG	600 V/50 A/12...6 AWG	600 V/65 A/12...6 AWG	600 V/115 A/12...2 AWG
Voltage/current/conductor size			CSA 600 V/65 A/6 AWG			
Ordering data			Version			
			KrG	 Qty.  Qty.	 Qty.  Qty.	 Qty.  Qty.
			PA	9503370000 25		9501320000 25
			PPO			
			KrG			
			for TS 35 x 7.5	PA 9508230000 25	PA 9506940000 25	PA 9506950000 25
			for TS 35 x 15/2.3	PA 9528300000 25	PA 9528310000 25	PA 9528320000 25
Partition, (thickness mm)			Cat. No.			
			PA	TW SS6 (TS32) 0455860000 10		
			Hard paper	TW HW 2/TS35 0607100000 20		
			HM	TW right 1718530000 10	TW right 1718530000 10	TW right 1718530000 10
			HM	TW left ²⁾ 1752800000 10	TW left 1752800000 10	TW left 1752800000 10
			Width/length/height (incl. TS 32) mm	2/129/93	2/160/83.5	2/160/83.5
			Width/length/height (incl. TS 35) mm	2/70/62.5	2/160/78.5	2/160/78.5
Cross-connection						
			2-pole	QL 2 0284300000 20	QL 2 9503390000 1	QL 2 9501350000 5
			3-pole	QL 3 0279000000 20		QL 2 9501360000 1
Marking tags			Print			
			DEK	Standard	DEK 5	see "Accessories"
			DEK	1 2 3 4 5 6	DEK 5	see "Accessories"
			DEK	Standard	DEK 5	see "Accessories"
			DEK	Standard	DEK 5	see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"						


* Depends on cable lug

¹⁾ with partition

²⁾ Left AP is required only once at beginning of terminal strip

Stud terminals

KST 10
KST 10/35



34/60/82
34/62.5/74.5
-/M 10/-

1000 V^I)/192 A/70 mm²
8 kV/3
10...20

207 A/70 mm²
200

600 V/175 A/12...2/0

Qty. Qty.

9501330000 20

9506960000 20
9528330000 20

+


TW right 1718530000 10
TW left 1752800000 10

2/160/83.5
2/160/78.5

QL 2 9501370000 1

DEK 5 see "Accessories"

KST 12
KST 12/35



34/60/82
34/62.5/74.5
-/M 12/-

1000 V^I)/232 A/95 mm²
8 kV/3
14...31

250 A/95 mm²
200

600 V/200 A/12...3/0

Qty. Qty.

9506970000 20
9528340000 20

+

TW right 1718530000 10
TW left 1752800000 10

2/160/83.5
2/160/78.5

QL 2 9501380000 1

DEK 5 see "Accessories"

SAK-series

PE terminals

EK 16
EK 16/35



12/50/57.5
12/56/50
16 mm/M 4/5.5 x 1.0
-/-/16 mm²

1.2...2.4/0.8...1.0*

2.5...16
2.5...16
2.5...16
4...16
12...6
B 6

Qty.	Qty.
0374660000 50	0190160000 50

Type	Cat. No.	Qty.
SH 2	0494920000	10

DEK 5 see "Accessories"

EK 35**
EK 35/35



18/58/67.5
16/58/60
20 mm/M 6/6.5 x 1.2
-/-/35 mm²

2.5...5.0/ **

6...16
16...50
10...35
10...35
10...2
B 9

Qty.	Qty.
0354760000 20	0661460000 20

Type	Cat. No.	Qty.
SH 2	0494920000	10

DEK 5 see "Accessories"

EK 2



10/52/38
14 mm/M 4/-
-/-/10

1.2...2.4/2.0...4.0*

1.5...10
1.5...10
1.5...10
1.5...10
16...8
B 6

Qty.
0323100000 20

Type	Cat. No.	Qty.
------	----------	------

SAKE 35



14/46/39
16 mm/M 6/-
-/-/35 mm²


2.5...5.0/2.0...4.0*

6...35
6...35
6...16
10...35
8...2
B 8

Qty.	Qty.
0144400000 20	

Type	Cat. No.	Qty.
SH 2	0494920000	10

SAKE 70



18/94/59.5
25 mm/M 8/-
-/-/70 mm²

6.0...12/2.0...4.0*

10...70
10...70
10...70
10...70
6...0
B 10

Qty.	Qty.
0213200000 20	1338300000 10

Type	Cat. No.	Qty.
SH 2	0494920000	10

EK 95/35



25/76/100/92
25/76/100/92
27 mm/M 10/-
-/-/95 mm²

10.0...20.0/1.2...2.4*

10...120
10...95
10...95
10...95
6...4/0
B 12


Qty.
0535300000 10
0535400000 10

Type	Cat. No.	Qty.
------	----------	------

SAK-series

** ADm f. EK 35/35 = 1.2 - 2.4 Nm
ADm f. EK 35 = 0.8 - 1.6 Nm


Fuse terminals

		ASK 1 ¹⁾ ASK 1/35 ¹⁾	KDKS 1 ¹⁾ KDKS 1/35 ¹⁾	SAKS 1 SAKS 1/35	SAKS 1/G25 SAKS 1/35/G25
					
Dimensions/approvals				  	  
Width/length/height (mm)	with TS 32 	8/58/45,5	8/73,5/59,8	13/54/61	13/54/61
Width/length/height (mm)	with TS 35 x 7,5 	8/58/44	8/73,5/55,7	13/54/54	13/54/54
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3,5 x 0,6	9 mm/M 3/3,5 x 0,6	12 mm/M 4/5,5 x 1,0	12 mm/M 4/5,5 x 1,0
Rated data/feed through-terminal base					
Rated voltage/current/cross-section		500 V/6,3 A ²⁾ /4 mm ²	500 V/6,3 A/4 mm ²	500 V/6,3 A ³⁾ /10 mm ²	500 V/6,3 A ³⁾ /10 mm ²
Rated impulse voltage/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data					
Tightening torque range	Nm	0,5...1,0	0,5...1,0	1,2...2,4	1,2...2,4
Torque setting with electric screwdriver type DMS 2		2	2	4	4
Clampable conductor					
Solid H07V-U	mm ²	0,5...4	0,5...4	0,5...16	0,5...16
Stranded H07V-R	mm ²	1,5...4		1,5...10	1,5...10
Flexible H07V-K	mm ²	0,5...4	0,5...4	0,5...10	0,5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0,5...4	0,5...4	0,5...10	0,5...10
Plug gauge according to 60 947-7-1	Size	A 3	A 4	B 6	B 6
Continuous current rating of cross-connection 2...5-pole	A	(QB 2...4) 10	(QB 2...4) 10	(QL 2...5) 47	(QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A			(QL 6...10) 36	(QL 6...10) 36
Rated data according to UL/CSA					
Voltage/current/conductor size	UL	300 V/6,3 A/12 max. AWG	300 V/15 A/12 max. AWG	300 V/6,3 A/22...10 AWG	
Voltage/current/conductor size	CSA	300 V/6,3 A/26...12 AWG		600 V/10 A/26...10 AWG	600 V/10 A/26...10 AW
Ordering data	Version	 Cat.No. Qty.	 Qty.  Qty.	 Qty.  Qty.	 Qty.  Qty.
	PA	0474560000 100	9503300000 50 9503310000 50		
	KrG			0191220000 20 0501620000 20	0191120000 20 0501520000 20
	Beige Wemid				0501500000 20
End plate/partition (thickness mm)	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
	AP (1,5) 0380360000 20	AP 1 KDKS 9503330000 25	Wemid 9532470000 25	AP (2,5) 0191320000 20	AP (2,5) 0191320000 20
		Wemid 9532470000 25	for  TW (2,0)	Wemid beige 0191300000 20	Wemid-beige 0191300000
				for  TW (2,0)	for  TW (2,0)
		0607000000 20		0607000000 20	0607000000 20
G-fuse inserts	5 x 20 mm	5 x 20 mm	5 x 20 mm	5 x 20 mm	5 x 25 mm
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1) rated current (A):	0.10 fast	0430300000 10	0430300000 10	0430300000 10	0,25 (m) 0546900000 10
Rated voltage 250 V	0.20 fast	0430400000 10	0430400000 10	0430400000 10	0,5 (m) 0510300000 10
Fast switching capacity 1500 A	0.25 fast	0430500000 10	0430500000 10	0430500000 10	0,8 (m) 0646400000 10
(at 250 V, 50 Hz, cos φ = 0.7)	0.50 fast	0430600000 10	0430600000 10	0430600000 10	1 (m) 0265800000 10
	1.0 fast	0430700000 10	0430700000 10	0430700000 10	10 (m) 0193100000 10
	1.6 fast	0430800000 10	0430800000 10	0430800000 10	2 (f) 0192700000 10
	2.0 fast	0430900000 10	0430900000 10	0430900000 10	4 (f) 0192800000 10
	2.5 fast	0431000000 10	0431000000 10	0431000000 10	6,3 (f) 0192900000 10
	3.15 fast				
	4.0 fast				
	5.0 fast				
	6.3 fast				
	Contact sleeve	0553300000 100	0553300000 100		
Screw cap/disconnector lever (spare)					
	TH	0377060000 100	TH 0377060000 100	SK (5 x 20) 0282100000 20	SK (5 x 25) 0282000000 20
	SIHA	1593020000 100	SIHA 1593020000 100		
Marking tags	Red pull lever				
	Print				
	DEK Standard	DEK 8 see "Accessories"	DEK 8 see "Accessories"	DEK 5 see "Accessories"	DEK 5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"					

¹⁾ Multipole interruptable with group marking carrier
Sch2 2-pole Cat. No. **1359500000**, 1000 mm Cat. No. **0337400000**

Fuse terminals

KSKM 1 KSKM 1/35



13/69/62
13/69/63
12 mm/-/-

250 V/6.3 A¹⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/10 A/22...8 AWG

Qty. Qty.

9509570000 20 9509600000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20


5 x 20 mm

0.10 (f)	0430300000	10
0.20 (f)	0430400000	10
0.25 (f)	0430500000	10
0.50 (f)	0430600000	10
1.00 (f)	0430700000	10
1.60 (f)	0430800000	10
2.00 (f)	0430900000	10
2.50 (f)	0431000000	10
3.15 fast	0431100000	10
4.0 fast	0431200000	10
5.0 fast	0431300000	10
6.3 fast	0431400000	10

5 x 20 SBL 0446100000 40

DEK 5 see "Accessories"

KSKM 2 KSKM 2/35



13/69/62
13/69/63
12 mm/-/-

250 V/13 A²⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509580000 20 9509610000 20


Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 x 1/4"

1 x 1/4" SBL 0446200000 40

DEK 5 see "Accessories"

KSKM 3 KSKM 3/35



13/69/62
13/69/63
12 mm/-/-

440 V/10 A/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509620000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 1/4 x 1/4"



E 2 A	0294500000	10
E 3 A	0295700000	10
E 5 A	0294600000	10
E 7 A	0295800000	10
E 10 A	0293900000	10

1 1/4 x 1/4" SBL 0446300000 40

DEK 5 see "Accessories"

¹⁾ Max. fuse rating according to DIN 41 660, IEC 127 CEE4 Type 1
²⁾ Fuse according to BS 1362

Fuse terminals

		SAKS 3 SAKS 3/35	SAKS 4 SAKS 4/35	SAKS 5 SAKS 5/35	SAKS 2 SAKS 2/35
					
Dimensions/approvals		   	  	  	   
Width/length/height (mm)	with TS 32 	13/54/61	24/75/73	28/80/80.5	28/80/81.5
Width/length/height (mm)	with TS 35 x 7.5 	13/54/55	24/75/66	28/80/66	28/80/75
Insulation stripping length/clamping screw/screwdriver blade		12 mm/M 4/5.5 x 1	14 mm/M 4/5.5 x 1	13 mm/M 4/5.5 x 1	12 mm/M 4/5.5 x 1
Rated data/feed through-terminal base					
Rated voltage/current/cross-section		500 V/10 A/10 mm ²	400 V**/16 A/10 mm ²	400 V/63 A***/16 mm ²	500 V/10 (25) A***/10 mm ²
Rated impulse voltage/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data					
Tightening torque range	Nm	1.2...2.4	1.2...2.4	1.2...2.4	1.2...2.4
Torque setting with electric screwdriver type DMS 2		4	4	4	4
Clampable conductor					
Solid H07V-U	mm ²	0.5...16	0.5...16	1.5...16	0.5...16
Stranded H07V-R	mm ²	1.5...10	1.5...10	1.5...16	0.5...10
Flexible H07V-K	mm ²	0.5...10	0.5...10	1.5...16	0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...10	0.5...10	1.5...16	0.5...10
Plug gauge according to 60 947-7-1	Size	B 6	B 6	B 7	B 6
Continuous current rating of cross-connection 2...5-pole	A	(QL 2...5) 47	(QL 2...5) 47	(QL 2...5) 47	(QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A	(QL 6...10) 36	(QL 6...10) 36	(QL 6...10) 36	(QL 6...10) 36
Rated data according to UL/CSA					
Voltage/current/conductor size	UL	300 V/10 A/22...10 AWG			
Voltage/current/conductor size	CSA	600 V/10 A/22...10 AWG	600 V/30 A/22...8 AWG	600 V/63 A/14...6 AWG	600 V/25 A/22...8 AWG
Ordering data	Version	 Qty. 	 Qty. 	 Qty. 	 Qty. 
	KrG	0248920000 ³⁾ 20 0667520000 ³⁾ 20	0321320000 20 0501820000 20	0359420000 20 0502120000 20	0206820000 20 1368720000 20
	KrG	0297520000 ⁴⁾ 20 0328920000 ⁴⁾ 20			
End plate/partition (thickness mm)		Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
	PA	AP (2.5) 0191320000	TW HP (2.0) 0607000000* 20	TW HP (2.0) 0607000000* 20	TW HP (2.0) 0607000000* 20
	HP	for  TW (2.0) 0607000000			
Cross-connection					
 			QL 2 0328000000 20	QL 2 0207800000 20	QL 2 0207800000 20
			QL 3 0328100000 20	QL 3 0207900000 20	QL 3 0207900000 20
			QL 4 0328200000 20	QL 4 0208000000 20	QL 4 0208000000 20
			QL 10 0339000000 20	QL 10 0338900000 20	QL 10 0338900000 20
			SS M 4 0136400000 100	SS M 4 0136400000 100	SS M 4 0136400000 100
			BS M 4x9 0103300000 100	BS M 4x9 0103300000 100	BS M 4x9 0103300000 100
			Gauge ring	Gauge ring	Gauge ring
			Amp. Colour Cat. No. Qty.	Amp. Colour Cat. No. Qty.	Amp. Colour Cat. No. Qty.
			P 14/2 prk 0138000000 50		
			P 14/4 brown 0138100000 50		P 16/10 red 0208900000 100
			P 14/6 green 0328600000 50		P 16/16 grey 0209000000 100
			P 14/10 red 0328700000 50	P 18/20 Blue 0361800000 50	P 16/20 Blue 0209100000 100
				P 18/25 yellow 0361900000 50	
				P 18/35 black 0362000000 50	
				P 18/50 white 0362100000 50	
Fixing screws for cross-connections					
Fuse inserts		Fuse insert			
1 1/4" x 1/4"	Nominal current (A): 0.5 fast	E 0.5 A 0533800000			
	1.0 fast	E 1 A 0525500000			
	2.0 fast	E 2 A 0294500000			
	3.0 fast	E 3 A 0295700000			
	5.0 fast	E 5 A 0294600000			
	7.0 fast	E 7 A 0295800000			
	10.0 fast	E 10 A 0293900000			
G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).					
Available from Wickmann-Werke GmbH, Annastr. 113, 58453 Witten, Germany, Phone ++492302/6620					
D fuse inserts			Rated voltage 400 V	Rated voltage 400 V	Rated voltage 500 V
			E 14/2 0137400000 10	E 18/20 0361300000 10	E 10 A 0208500000 25
			E 14/4 0137500000 10	E 18/25 0361400000 10	E 16 A 0208600000 25
			E 14/6 0328300000 10	E 18/35 0361500000 10	E 20 A 0208700000 25
			E 14/10 0328400000 10	E 18/50 0361600000 10	E 25 A 0208800000 25
			E 14/16 0328500000 10	E 18/63 0361700000 10	
Screw cap (spare)					
	red	SK (5 x 30) 0282000000 20	SK 0339410000 20	SK 0359310000 20	SK 0284110000 20
	black	SK (1/4"x1 1/4") 0428900000 20			
Marking tags	Print				
	DEK Standard	DEK 5 see "Accessories"	DEK 5 see "Accessories"	DEK 5 see "Accessories"	DEK 5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"					

*only for TS 32

** Also for 440 V~ with neozed marina fuse

*** Current for overload up to 10 A, for short circuit up to 25 A

³⁾ For fuse inserts 1 1/4" x 1/4" DEF 63

⁴⁾ For fuse inserts 5 x 30

Fuse terminals

SAKS 4 USA



24/75/73
24/75/66
14 mm/M 4/5.5 x 1
400 V/30 A/10 mm ²
6 kV/3
1.2...2.4
4
0.5...16
1.5...10
0.5...10
0.5...10
B 6
(QL 2...5) 47
(QL 6...10) 36
600 V/30 A/20...8 AWG
600 V/30 A/22...8 AWG
Qty. Qty.
0162220000 20 0178220000 20
10.3 x 38,1
Type Cat. No. Qty.
TW HP (2.0) 0607000000*20
QL 2 0328000000 20
QL 3 0328100000 20
QL 4 0328200000 20
QL 10 0339000000 20
SS M 4 0136400000 100
BS M 4 x 9 0103300000 100
SK (w. spring) 0161730000 20
DEK 5 see "Accessories"


Fuse terminals with fault indicator



Dimensions/approvals	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length	mm
Connection data	
Screw connection, solid	
Screw connection, flexible/ferrule with/without plastic collar	
Conductor cross-section	
VDE rated data	
Current	
Voltage	
LED-current (24...60 V)	
LED-current (115...230 V)	
LED-current (24...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	
Ordering data	
24 V~	ASK 1 LD 8050810000 25
24 V~	ASK 1 LD 0222760000 25
48 V~	ASK 1 LD 0225260000 25
60 V~	ASK 1 LD 0226460000 25
115 V~	ASK 1 LD 0225460000 25
230 V~	ASK 1 LD 0225660000 25
24 V~	ASK 1 LD 0222860000 25
48 V~	ASK 1 LD 0225360000 25
60 V~	ASK 1 LD 0226360000 25
115 V~	ASK 1 LD 0225560000 25
230 V~	ASK 1 LD 0225760000 25
Mountable on	
TS 32 and TS 35	
TS 32 0122800000	
TS 35x7.5 0383400000	
TS 35x15 0498000000	
EWK 1 0206160000 50	
EW 35 0383560000 50	
AP PA (1.5) 0380360000 20	
QB 2 ¹⁾ 0461100000 100	
QB 3 ¹⁾ 0461200000 50	
QB 4 ¹⁾ 0461300000 50	
QB 58 ¹⁾ 0545400000	
QB 58 ¹⁾ 0545300000	
Fixing screw (fits QL)	
Disconnect lever (spare)	
TH (spare) 0377060000 100	
Accessories	
Mounting rail	
End brackets (thickness mm) for TS 32	
for TS 35	
End plate/End plate (thickness mm)	
Cross-connections	
Type 'QL'	
Cross-connection	
Type 'QB'	
straight	
angled	
Mounting rails, end brackets, further marking material see "Accessories"	

¹⁾When using QB, the rated cross-current reduces to max. 2.5 mm²


ASK 1 LD




Warning:
In the event of a faulty fuse, the connection system is live!

		
8		
9		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
6.3 A		
24...230 V (depending on terminal)		
≤ 2 mA		
≤ 2 mA		
4 mm ²		
Type	Cat. No.	Qty.
ASK 1 LD	8050810000	25
ASK 1 LD	0222760000	25
ASK 1 LD	0225260000	25
ASK 1 LD	0226460000	25
ASK 1 LD	0225460000	25
ASK 1 LD	0225660000	25
ASK 1 LD	0222860000	25
ASK 1 LD	0225360000	25
ASK 1 LD	0226360000	25
ASK 1 LD	0225560000	25
ASK 1 LD	0225760000	25
Mountable on		
TS 32 and TS 35		
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1	0206160000	50
EW 35	0383560000	50
AP PA (1.5)	0380360000	20
QB 2 ¹⁾	0461100000	100
QB 3 ¹⁾	0461200000	50
QB 4 ¹⁾	0461300000	50
QB 58 ¹⁾	0545400000	
QB 58 ¹⁾	0545300000	
Fixing screw (fits QL)		
Disconnect lever (spare)		
TH (spare)	0377060000	100
Accessories		
Mounting rail		
End brackets (thickness mm) for TS 32 		
for TS 35 		
End plate/End plate (thickness mm)		
Cross-connections		
Type "QL"		
Cross-connection		
Type "QB"		
straight		
angled		
Mounting rails, end brackets, further marking material see "Accessories"		

KDKS 1 Fuse insert 5 x 20



AC model



DC model

Warning:
In the event of a faulty fuse, the connection system is live!

		
8		
9		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
		
6.3 A		
24...230 V (depending on terminal)		
		
≤ 2 mA		
		
4 mm ²		
Type	Cat. No.	Qty.
KDKS 1	8146450000	25
		
KDKS 1	8148930000	25
KDKS 1	8148920000	25
		
KDKS 1	8142840000	25
KDKS 1	8148910000	25
		
Mountable on		
TS 32 and TS 35		
		
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
		
EW 35	0383560000	50
		
QB 2 ¹⁾	0461100000	100
QB 3 ¹⁾	0461200000	50
QB 4 ¹⁾	0461300000	50
QB 58 ¹⁾	0545400000	
QB 58 ¹⁾	0545300000	
		
		
		

Fuse terminals

with fault indicator



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	

Connection data

Screw connection, solid
Screw connection, flexible
Conductor cross-section

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

VDE rated data

Voltage/current	~10 A
LED-current (24...60 V)	≤ 5 mA
LED-current (115...230 V)	
Incandescent lamp-current	≤ 50 mA
Neon lamp-current	≤ 0.5 mA
Cross-section	10 mm ²

Ordering data


Fuse insert	Voltage	
5 x 20	LED	24 V~
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)		24 V~
without indicator		48 V~
		48 V~
	Incandescent lamp	24 V=
		48 V=
	Neon lamp	115 V=
		230 V=
Fuse insert		
5 x 25	LED	24 V~
Acc. to DIN 41576		
without indicator	Incandescent lamp	48 V=
	Neon lamp	115 V=
		230 V=

Accessories

Mounting rail	
End brackets (thickness mm)	for TS 32
	for TS 35
End plate (thickness mm)	
Cross-connection	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Screw cap (spare)	
Neon lamp	

SAKS 1

Fuse insert 5x20/5x25



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

13
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

SAKS 4

Fuse insert E14/D 01
(e.g. Neozed D 01)



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

24
14
0.5...16 mm ²
0.5...10 mm ²
AWG 20...7

SAKS 6

Fuse insert 11/4" x 1/4"
acc. to DEF 63



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

12
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

SAKS 7

Fuse insert 5x20/5x25



Warning:

In the event of a faulty fuse, the connection system is live!

UL & CE

12
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

Type	Cat. No.	Qty.
SAKS 1 LD		
0371420000	10	0225820000
1111220000	10	1111320000
		0214020000
SAKS 1 GL		
		0173220000
0378920000	10	
SAKS 1 GL		
0385320000	10	8068330000
0306120000	10	0199920000
SAK 1 LD		
on demand		
SAKS GL		
on demand		
SAKS 1 GL		
0309320000	10	0198620000

Type	Cat. No.	Qty.
SAKS 4		
TS 32 Neon lamp		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10

Type	Cat. No.	Qty.
SAKS 6 KrG	0531820000	40
for 1 1/4" x 1/4" acc. to DEF 63		
exchangeable neon lamps		
(please order separately)		

Type	Cat. No.	Qty.
SAKS 7 KrG		
for 5 x 25	0576120000	40
SAKS 7 KrG		
for 5 x 20	0573120000	40
exchangeable neon lamps		
(please order separately)		

Type	Cat. No.	Qty.
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1 (8.5)	0206160000	50
EW 35 (8.5)	0383560000	50
AP KrG (3)	0191320000	20
SK (5 x 20)	0282100000	20
SK (5 x 25)	0282000000	100

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG	0146720000	20
QL 2	0191400000	50
QL 3	0191500000	50
QL 4	0191600000	20
QL 10	0338800000	20
BSM 3x6 m.SS	0346200000	100

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG (3)	0146720000	20
QL 2	0207800000	20
QL 3	0207900000	20
QL 4	0208000000	20
QL 10	0338900000	20
BSM 4x9 m.SS	0133300000	100

Neon lamp 230 V~	0550300000
Neon lamp 115 V~	0550200000

Neon lamp 230 V~	0550300000
Neon lamp 115 V~	0550200000

Fuse inserts and gauge rings for Weidmüller fuse terminals

Fuse inserts

for terminal type	Size (mm)	Rated voltage (V)	Rated current (A)	Type	Cat. No.	Qty.
G fuse inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)						
SAKS 1	5 x 20 Breaking capacity 1500 A (at 250 V, 50 Hz, cos φ 0.7)	250	0.1 (F)	G 20/0.10A/F	0430300000	10
SAKS 7			0.2 (F)	G 20/0.20A/F	0430400000	10
ASK 1			0.25 (F)	G 20/0.25A/F	0430500000	10
WSI 6			0.5 (F)	G 20/0.50A/F	0430600000	10
			0.63 (F)	G 20/0.63A/F	0430900000	10
			1.0 (F)	G 20/1.00A/F	0430700000	10
			1.6 (F)	G 20/1.60A/F	0430800000	10
			2.0 (F)	G 20/2.00A/F	0430900000	10
			2.5 (F)	G 20/2.50A/F	0431000000	10
			3.15 (F)	G 20/3.15A/F	0431100000	10
			4.0 (F)	G 20/4.00A/F	0431200000	10
			5.0 (F)	G 20/5.00A/F	0431300000	10
			6.3 (F)	G 20/6.30A/F	0431400000	10
G fuse inserts 5 x 25 with indicator acc. to DIN 41576¹)						
SAKS 1	5 x 25 m. K.1) Breaking capacity 80 A (at 250 V, 50 Hz, cos φ = 1)	250	0.25 (M)	G 25/0.25A/M	0546900000	10
SAKS 7			0.5 (M)	G 25/0.50A/M	0510300000	10
WSI 6			0.8 (M)	G 25/0.80A/M	0646400000	10
			1 (M)	G 25/1.00A/M	0265800000	10
			10 (M)⁵)	G 25/10.0A/M	0193100000	10
			2 (F)	G 25/2.00A/F	0192700000	10
			4 (F)	G 25/4.00A/F	0192800000	10
			6.3 (F)	G 25/6.30A/F	0192900000	10
Fuse inserts 1¼" x ¼" without indicator acc. to BS 88						
SAKS 3²)	33 kA Breaking capacity 33 kA fast	440	0.5	GZ 0.5A/F	0533800000	10
SAKS 6			1	GZ 1.0A/F	0525500000	10
			2	GZ 2.0A	0294500000	10
			3	GZ 3.0A	0295700000	10
			5	GZ 5.0A	0294600000	10
			7	GZ 7.0A	0295800000	10
			10	GZ 10.0A	0293900000	10
D fuse inserts E 16 with indicator acc. to DIN 49360 (diazed)						
SAKS 2	E 10 A	500	10	E 16/10A RT	0208500000	25
			16	E 16/16A GR	0208600000	25
			20	E 16/20A BL	0208700000	25
			25	E 16/25A GE	0208800000	25
D fuse inserts E 14 Size D 01 and E 18 size D 02 with indicator acc. to DIN 49522 (neozed)³)						
SAKS 4⁴)	E 14/2	400	2	E 14/2A RS	0137400000	10
			4	E 14/4A BR	0137500000	10
			6	E 14/6A GN	0328300000	10
			10	E 14/10A RT	0328400000	10
			16	E 14/16A GR	0328500000	10
			20	E 18/20A BL	0361300000	10
SAKS 5	E 18/25	400	25	E 18/25A GE	0361400000	10
			35	E 18/35A SW	0361500000	10
			50	E 18/50A WS	0361600000	10
			63	E 18/63A KU	0361700000	10
(F) = fast						
(M) = medium-delayed action						

(F) = fast
(M) = medium-delayed action

- Note:**
- 1) The SIBA company also supplies 5 x 25 G fuse inserts with indicators in a shipbuilding model for 450 V AC.
 - 2) 5 x 30 (500 V AC) fuse inserts for SAKS 3 are available from the WICKMANN company
 - 3) The LINDNER company also supplies neozed fuse cartridges in an additional shipbuilding mode for 440 V AC.
 - 4) Fuse cartridges with the dimensions 1"x1/4" ≙ 25.4x6.35 mm and 13/32"x1 1/2" ≙ 10.3x38.1 mm are not included in product line.
 - 5) Only for SAKS 1 and SAKS 7.

Gauge rings

For terminal type	Gauge ring type	Amp.	Colour	Type	Cat. No.	Qty.
SAKS 4 and 4/35	P 14/2	2	Pink	P 14/2D01 RS	0138000000	50
	P 14/4	4	Brown	P 14/4D01 BR	0138100000	50
	P 14/6	6	Green	P 14/6D01 GN	0328600000	50
	P 14/1	10	Red	P 14/10D01 RT	0328700000	50
SAKS 5 and 5/35	P 18/20	20	Blue	P 18/20D02 BL	0361800000	50
	P 18/25	25	Yellow	P 18/25D02 GE	0361900000	50
	P 18/35	35	Black	P 18/35D02 SW	0362000000	50
	P 18/50	50	White	P 18/50D02 WS	0362100000	50
SAKS 2 and 2/35	P 16/10	10	Red	P 16/10 RT	0208900000	100
	P 16/16	16	Grey	P 16/16 GR	0209000000	100
	P 16/20	20	Blue	P 16/20 BL	0209100000	100

Disconnect test terminals


SAKR
SAKR/35



SAKR-D
SAKR-D/35



DKT 4
DKT 4/35



DKT 4 V
DKT 4 V/35



Dimensions/approvals			SAKR/35	SAKR-D/35	DKT 4/35	DKT 4 V/35
Width/length/height (mm)	with TS 32		6.5/42/40.5/54.5 (opened)	6.5/42/40.5/57 (with DLS 2)	6/65/56.5/70 (opened)	6/65/56.5/70 (opened)
Width/length/height (mm)	with TS 35 x 7.5		6.5/46/38/52	6.5/46/38/54.5	6/65/56.5/70	6/65/56.5/70
Insulation stripping length/clamping screw/screwdriver blade			8 mm/M 3/3.5 x 0.6	8 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Rated data						
Rated voltage/current/cross-section			400 V ⁶⁾ /10 A/4 mm ²	400 V/10 A/4 mm ²	400V/10 A/4 mm ²	400 V/10 A/4 mm ²
Rated impulse voltage/pollution severity			6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data						
Tightening torque range		Nm	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB
Torque setting with electric screwdriver type DMS 2			2/1	2/1	2/1	2/1
Clampable conductor						
Solid H07V-U	mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Stranded H07V-R	mm ²		1.5...4	1.5...4	1.5...4	1.5...4
Flexible H07V-K	mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²					
With/without plastic insulating collar	mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Plug gauge according to 60 947-7-1	Size		A 3	A 3	A 3	A 3
Continuous current rating of cross-connection 2...5-pole	A		(QB 2...25) 10	(QB 2...25) 10	(QB 2...4) 10	(QB 2...4) 10
Continuous current rating of cross-connection 6...10-pole	A					
Rated data according to UL/CSA						
Voltage/current/conductor size	UL		300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size	CSA		300 V/10 A/26...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG
Ordering data			Type Qty. Type Qty.	Type Qty. Type Qty.	Type Qty. Type Qty.	Type Qty. Type Qty.
			KrG 0412120000 100			
			PA 0412160000 100 0172160000 100	0412960000 ¹⁾ 100 0299960000 ⁵⁾ 50	0687360000 50 0687460000 50	
Without diode PA				0413060000 ³⁾ 50 0185760000 ³⁾ 50		
With diode PA				0263660000 ³⁾ 50 0299560000 ³⁾ 50		
Blue PA			0412180000 100 0172180000 100			
Orange PA			1461960000 100			
KrG			0412220000 100			
With 2 StB ⁵⁾			PA 0412260000 100 0183360000 100	0546460000 ¹⁾ 100	0327860000 50 0327960000 50	1304860000 50 1304960000 50
With 2 StB ⁵⁾			without diode PA	0413160000 ²⁾ 50		
With 2 StB ⁵⁾			Blue	0412280000 100 0183380000 100		
End plate (thickness mm)			Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
KrG			AP (1.5) 0211320000 20	AP (1.5) 0211360000 20	AP (1.5) 0687560000 20	AP (1.5) 0687560000 20
PA			AP (1.5) 0211360000 20			
Blue PA			AP (1.5) 0211380000 20			
Partition (thickness mm)						
			TW HP (1.0) 0297100000 20	TW HP (1.0) 0297100000 20	TW HP (2.0) 0607000000 20	TW HP (2.0) 0607000000 20
Cross-connection						
QB 4			2-pole QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100
			3-pole QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50
			4-pole QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50
			25-pole QB 25 blank ⁴⁾ 0134000000 20	QB 25 blank ⁴⁾ 0134000000 20		
Contact sleeve (spare)						
Test plug			PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
Diode plug (spare)						
without diode				DLS 2 0321060000 50		
with diode 1N4007				DLS 2 + 0630160000 50		
with diode 1N4007				DLS 2 - 0547760000 50		
with jumper				DLS 2 0547660000 25		
Marking tags						
	1	DEK	Standard	DEK 6.5 see "Accessories"	DEK 6 see "Accessories"	DEK 6 see "Accessories"
	2					
	3					
	4					
	5					
	6					
Mounting rails, end brackets, further marking material see "Accessories"						


¹⁾ without DLS
²⁾ with DLS empty

³⁾ with DLS 1N4007
⁴⁾ When using QB the rated cross-current reduces to max. 2.5 mm²

⁵⁾ With DKT 4 only on upper terminal level
⁶⁾ As disconnect test terminal rated voltage 250 V

Disconnect test terminals

ASK 1
ASK 1/35



UL  

8/58/49

8/58/44

9 mm/M 3/3.5 x 0.6

500 V/19 A/4 mm²

6 kV/3

0.5...1.0

2

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...4) 10

300 V/15 A/12 max. AWG

300 V/6.3 A/26...12 AWG

 Qty.

0456360000 100

0105260000 100

Type	Cat. No.	Qty.
------	----------	------

AP (1.5)	0380360000	20
----------	------------	----

TW HP (2.0)	0607000000	20
-------------	------------	----

QB 2 ⁴)	0461100000	100
---------------------	------------	-----

QB 3 ⁴)	0461200000	50
---------------------	------------	----


QB 4 ⁴)	0461300000	50
---------------------	------------	----

multipole interruptable with
group marking carrier SchS 2;
2-pole (Cat. No. **1359500000**)
1000 mm (Cat. No. **0337400000**)

K sleeve	0553300000	100
----------	------------	-----

DEK 5 FW	see "Accessories"	
----------	-------------------	--

Feed-through terminals with tab connection

				AST 1 AST 1/35	AST 3 AST 3/35	AST 4 AST 4/35	AST 5 AST 5/35
				6.3 2.8	6.3 2.8	6.3 2.8	6.3 2.8
							
				   DNV	  DNV	  	   DNV
Dimensions/approvals				6.5/58/53.5	6.5/40/47.5	6.5/40/47.5	6.5/58/53.5
Width/length/height (mm)				with TS 32 			
Width/length/height (mm)				with TS 35 x 7.5 			
Insulation stripping length/clamping screw/screwdriver blade						9 mm/M 2.5/3.5 x 0.6	12 mm/M 3/3.5 x 0.6
Rated data							
Rated voltage/-current				500 V ¹⁾ /-	500 V ¹⁾ /-	500 V ¹⁾ /-	500 V ¹⁾ /-
Rated cross-section for clamping yokes				-	-	2.5 mm ²	4 mm ²
Rated cross-section tab				6.3/2.8 mm	2.5/1.0 mm ²	2.5/1.0 mm ²	2.5/1.0 mm ²
Rated Voltage VDE 0110/1.89/pollution severity				6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data							
Tightening torque range				Nm		0.4...0.7	0.5...1.0
Torque setting with electric screwdriver type DMS 2						1	2
Clampable conductor							
Solid H07V-U				mm ²		0.5...4	0.5...6
Stranded H07V-R				mm ²		1.5...2.5	1.5...4
Flexible H07V-K				mm ²		0.5...2.5	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1				mm ²		0.5...2.5	0.5...4
Plug gauge according to 60 947-7-1				Size		A 3	A 4
Continuous current of terminal for conductor size							
Continuous current rating of cross-connection 2...5-pole				A	(QL 2...10) 20	(QL 2...10) 20	(QL 2...10) 20
Continuous current rating of cross-connection 6...10-pole				A			
Rated data according to UL/CSA							
Voltage/current/conductor size				UL	300 V/13 A/-	300 V/13 A/22...12 AWG	300 V/13 A/22...12 AWG
Voltage/current/conductor size				CSA	300 V/16 A/-	300 V/16 A/24...12 AWG	300 V/16 A/24...12 AWG
Ordering data				Version			
				 Qty.  Qty.	 Qty.  Qty.	 Qty.  Qty.	 Qty.  Qty.
				Slotted KrG	0478220000 50	0442420000 100	0479220000 50
				Slotted blue KrG			
				Slotted PA	0478260000 ²⁾ 50 0699660000 ²⁾ 50	0442470000 100	0479260000 50 0664960000 50
				Unslotted KrG	0266320000 50	0298020000 100	0334520000 50
				Unslotted blue KrG			
				Unslotted PA	0266360000 ²⁾ 50 0664860000 ²⁾ 50	0236760000 ²⁾ 100 0479360000 ²⁾ 10	0334560000 50 0699760000 50
End plate/partition/small partition (thickness mm)				Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
AP TW TSCH 1 KrG				AP (3.0) 0266420000 20	AP (3.0) 0298120000 20	AP (3.0) 0298120000 20	AP (3.0) 0266420000 20
Blue KrG							
PA				AP (1.5) 0266460000 20	AP (1.5) 0460560000 20	AP (1.5) 0460560000 20	AP (1.5) 0266460000 20
PA					TW (1.5) 0130160000 20	TW (1.5) 0130160000 20	
HP				TW (0.5) 0474700000 20	TW (1.0) 0297100000 20	TW (1.0) 0297100000 20	TW (1.0) 0474700000 20
HP				TW (2.0) 0607000000 20			TW (2.0) 0607000000 20
Only for PA				TSch 1 0319160000 100	TSch 1 0319160000 100	TSch 1 0319160000 100	TSch 1 0319160000 100
Cross-connection							
Q4				2-pole Q 2 0336700000 50	Q 2 0336700000 50	Q 2 0336700000 50	Q 2 0336700000 50
				3-pole Q 3 0336800000 50	Q 3 0336800000 50	Q 3 0336800000 50	Q 3 0336800000 50
				4-pole Q 4 0336900000 50	Q 4 0336900000 50	Q 4 0336900000 50	Q 4 0336900000 50
				10-pole Q 10 0368800000 20	Q 10 0368800000 20	Q 10 0368800000 20	Q 10 0368800000 20
				25-pole			
Plug adapter							
				2-pole	STA 2.5/2 0165860000 100	STA 2.5/2 0165860000 100	
				3-pole	STA 2.5/3 0165960000 50	STA 2.5/3 0165960000 50	
				4-pole	STA 2.5/4 0190360000 50	STA 2.5/4 0190360000 50	
				5-pole	STA 2.5/5 0166060000 50	STA 2.5/5 0166060000 50	
				8-pole	STA 2.5/8 0166160000 50	STA 2.5/8 0166160000 50	
Test plug/socket							
Plug-test socket without using QL for TS 32				StB 14 0168600000 50	StB 14 0168600000 50	StB 14 0168600000 50	StB 14 0168600000 50
PS							
StB				PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
Insulation sleeve							
				IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100
				IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100
Marking tags				Print			
     				DEK Standard	DEK 6.5 see "Accessories"	DEK 6 see "Accessories"	DEK 6.5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"							

¹⁾ with insulation sleeve

²⁾ shock proof with ADP 4 cover profiles ADP4 (see section "Accessories")

Feed-through terminals with tab connection

SAK 4 S SAK 4 S/35

6.3
2.8



SAK 4 SS SAK 4 SS/35

6.3
2.8



SAKR F SAKR F/35

2.8



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	



6.5/40/51.5
6.5/40/49.5
12 mm/M 3/3.5 x 0.6



6.5/40/51.5
6.5/40/49.5



6.5/42/40.5/54.5 (opened)
6.5/42/40.5/32.5
8 mm/M 3/3.5 x 0.6

Rated data

Rated voltage/-current	500 V ¹⁾ /16 A
Rated cross-section for clamping yokes	4 mm ²
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3

500 V¹⁾/16 A

4 mm²

2.5/1.0 mm²

6 kV/3

500 V¹⁾/16 A

-

2.5/1.0 mm²

6 kV/3

250 V¹⁾/10 A

4 mm²

-/1.0 mm²

6 kV/3

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

0.5...1.0

2

0.5...1.0

1

Clampable conductor

Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A
Continuous current rating of cross-connection multipole	A

0.33...6

1.5...4

0.5...4

0.5...4

A 4

(QL 2...10) 36 A at 6 mm²

500 V¹⁾/16 A

-

2.5/1.0 mm²

6 kV/3

(QL 2...10) 36 A at 6 mm²

0.5...4

1.5...4

0.5...4

0.5...2.5

A 3

(QB 2...25) 10

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

300 V/13 A/26...12 AWG

300 V/13 A/26...12 AWG

300 V/13 A/18...14 AWG

300 V/13 A/18...14 AWG

300 V/10 A/22...12 AWG

300 V/10 A/26...12 AWG

Ordering data

Version

Slotted KrG
Slotted blue KrG
Slotted PA
Unslotted KrG

Qty.	Qty.
0401220000	100
0401260000	100
0630360000	100

Qty.	Qty.
0479620000	10
0479660000	100
0630460000	100
0352920000	10

Qty.	Qty.
0663660000	100
6382870000	100
with 1 StB 6	

End plate/partition/small partition (thickness mm)

AP	TW	TSch 1	KrG
			Blue KrG
			PA
			PA
			HP



Type	Cat. No.	Qty.
AP (1.5)	0117920000	20
AP (1.5)	0117960000	20
AP (1.5)	0130160000	20
TW (1.0)	0297100000	20

Type	Cat. No.	Qty.
AP (1.5)	0117920000	20
AP (1.5)	0117970000	20
AP (1.5)	0117960000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20

Type	Cat. No.	Qty.
AP (1.5)	0211360000	20
TW (1.0)	0297100000	20

Cross-connection

QL	QB 4	2-pole
		3-pole
		4-pole
		10-pole
		25-pole



QL 2	0130600000	100
QL 3	0130700000	100
QL 4	0130800000	50
QL 10	0338200000	20

QL 2	0130600000	100
QL 3	0130700000	100
QL 4	0130800000	50
QL 10	0338200000	20

QB 2*	0482700000	100
QB 3*	0482800000	50
QB 4*	0482900000	50
QB 25 blank*	0134000000	20

BS M 3 x 4.5



BS M 3 x 24



BS M 3x4.5 1593210000 100

BS M 3x4.5 1593210000 100


Test plug/socket



PS

PS 2.3 0180400000 20

Insulation sleeve



IH 2.8	0386060000	100
IH 6.3	0386260000	100

IH 2.8	0386060000	100
IH 6.3	0386260000	100

IH 2.8 0386060000 200

Marking tags

Print

1	2	3	4	5	6
---	---	---	---	---	---

DEK

Standard

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ With insulation sleeve

*The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used

Feed-through terminals with tab connection

DK 4 SS/35



DK 4 SS/35 only 2.8



DK 4 S DK 4 S/35



DK 4 S only 2.8 DK 4 S/35 only 2.8



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data

Rated voltage/-current	400 V ¹⁾ /2 x 16 A
Rated cross-section for clamping yokes	-
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

Clampable conductor

Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
With/without plastic insulation collar	
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A
Continuous current rating of cross-connection multipole	A

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Version	PA
---------	----



6/54/60.5



6/54/60.5



6/54/59.5
6/54/60.5
9 mm/M 3/3.5 x 0.6



6/54/59.5
6/54/60.5
9 mm/M 3/3.5 x 0.6

End plate (thickness mm)



PA

Type	Cat. No.	Qty.
AP (1.5)	0631360000	20

Type	Cat. No.	Qty.
AP (1.5)	0631360000	20

Type	Cat. No.	Qty.
AP (1.5)	0631360000	20

Type	Cat. No.	Qty.
AP (1.5)	0631360000	20

Partition



for TS 32 HP

Type	Cat. No.	Qty.
TW HP (2.0)	0607000000	20

Type	Cat. No.	Qty.
TW HP (2.0)	0607000000	20

Type	Cat. No.	Qty.
TW HP (2.0)	0607000000	20

Type	Cat. No.	Qty.
TW HP (2.0)	0607000000	20

Small partition



TSch 6

Type	Cat. No.	Qty.
TSch 6	0190260000	100

Type	Cat. No.	Qty.
TSch 6	0190260000	100

Type	Cat. No.	Qty.
TSch 6	0190260000	100

Type	Cat. No.	Qty.
TSch 6	0190260000	100

Cross-connection



Q 3

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20

Test plug/socket



StB

Plug test socket without using QL
Plug test socket for use with QL

Type	Cat. No.	Qty.
StB 8.5	0215700000	50

Type	Cat. No.	Qty.
StB 8.5	0215700000	50

Type	Cat. No.	Qty.
StB 8.5	0215700000	50

Type	Cat. No.	Qty.
StB 8.5	0215700000	50

Insulation sleeve



PS


Type	Cat. No.	Qty.
PS 2.3	0180400000	20

Type	Cat. No.	Qty.
PS 2.3	0180400000	20

Type	Cat. No.	Qty.
PS 2.3	0180400000	20

Type	Cat. No.	Qty.
PS 2.3	0180400000	20

Marking tags



DEK

Print

DEK 6 see "Accessories"

DEK 6 see "Accessories"

DEK 6 see "Accessories"

DEK 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ With insulation sleeve

Feed-through terminals for wrap termination

DIN 41 611, Part 2 and for spring-clip termination DIN 41 611, Part 4

SAK 2.5 T

Pin 1 x 1



SAK 2.5 T

Pin 0.8 x 1.6



SAK 2.5 T

Pin 0.8 x 2.4



Dimensions/approvals

Width/length/height (mm) with TS 32
Insulation stripping length/clamping screw/screwdriver blade

6/36.5/47.5/67
12 mm/M 2.5/3.5 x 0.6

6/36.5/47.5/62
12 mm/M 2.5/3.5 x 0.6

6/36.5/47.5/69
12 mm/M 2.5/3.5 x 0.6

Rated data

Rated voltage/current/cross-section
Rated impulse voltage VDE 0110/1.89/pollution severity

250 V/8 A/2.5 mm²
4 kV/3

250 V/10 A/2.5 mm²
4 kV/3

250 V/10 A/2.5 mm²
4 kV/3

Further technical data

Tightening torque range Nm
Torque setting with electric screwdriver type DMS 2

0.4...0.7
1

0.4...0.7
1

0.4...0.7
1

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²
Flexible H07V-K mm²
Flexible H07V-K and ferrule according to DIN 46 228/1 mm²
Plug gauge according to IEC 60 947-1 Size

0.5...6
0.5...2.5
0.5...4
0.5...2.5
A 3

0.5...6
0.5...2.5
0.5...4
0.5...2.5
A 3

0.5...6
0.5...2.5
0.5...4
0.5...2.5
A 3

Continuous current of terminal for conductor size
Continuous current rating of cross-connection 2-pole A
Continuous current rating of cross-connection multipole A

(Q 2...10) 24
(Q 2...10) 24
(Q 2...10) 24

(Q 2...10) 24
(Q 2...10) 24
(Q 2...10) 24

(Q 2...10) 24
(Q 2...10) 24
(Q 2...10) 24

Rated data according to UL/CSA

Voltage/current/conductor size UL
Voltage/current/conductor size CSA

300 V/10 A/22...12 AWG
300 V/10 A/22...12 AWG

300 V/10 A/22...12 AWG
300 V/10 A/22...12 AWG

300 V/10 A/22...12 AWG
300 V/10 A/22...12 AWG

Ordering data

Pin Version
Right KrG
Horizontal right KrG
Vertical left KrG
Vertical right KrG
2x vertical KrG



Horizontal assembly
Vertical assembly

Cat. No. Qty.
0108520000 100
0108560000¹⁾ 100

Cat. No. Qty.
0485920000 100
0478820000 100

Cat. No. Qty.
0371020000 100
0485020000 100

End plate (thickness mm)



KrG

Type Cat. No. Qty.
AP (1.5) 0279520000 20

Type Cat. No. Qty.
AP (1.5) 0279520000 20

Type Cat. No. Qty.
AP (1.5) 0279520000 20

PA

AP (1.5) 0279560000 20

AP (1.5) 0279560000 20

AP (1.5) 0279560000 20

Partition (thickness mm)



KrG

TW (2.5) 0302820000 20

TW (2.5) 0302820000 20

TW (2.5) 0302820000 20

PA

TW (1.5) 0302860000 20

TW (1.5) 0302860000 20

TW (1.5) 0302860000 20

HP

TW (0.5) 0197100000 20

TW (0.5) 0197100000 20

TW (0.5) 0197100000 20

HP

TW (2.0) 0607000000 20

TW (2.0) 0607000000 20

TW (2.0) 0607000000 20

Small partition

TSch 1 0319160000 100

TSch 1 0319160000 100

TSch 1 0319160000 100

Cross-connection



2-pole

Q 2 0337000000 50

Q 2 0337000000 50

Q 2** 0337000000 50

3-pole

Q 3 0337100000 50

Q 3 0337100000 50

Q 3** 0337100000 50

4-pole

Q 4 0337200000 50

Q 4 0337200000 50

Q 4** 0337200000 50

10-pole

Q 10 0368700000 20

Q 10 0368700000 20

Q 10** 0368700000 20

Test plug/socket

Plug-test socket without using QL

StB 8.5 (ø 23) 0280600000 50

StB 8.5 (ø 2.3) 0280600000 50

StB 8.5 (ø 23) 0280600000 50



PS



StB


PS 2.3 0180400000 20

PS 2.3 0180400000 20

PS 2.3 0180400000 20

Marking tags

Print



DEK

Standard

DEK 6 see "Accessories"

DEK 6 see "Accessories"

DEK 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

** Not for Type 2 x vertical"

Feed-through terminals

**Disconnect terminals
for wrap connection
acc. to DIN 41 611, Part 2 and
for spring-clip connection
acc. to DIN 41 611, Part 4**

DK 4 T

Pin 1 x 1



DK 4 T

Pin 0.8 x 1.6



DK 4 T

Pin 0.8 x 2.4



SAKRT

Pin 1 x 1/0.8 x 2.4
and 0.8 x 1.6



Dimensions

Width/length/height (mm) with TS 32 
Insulation stripping length/clamping screw/screwdriver blade

6/50/58.5/75.5
9 mm/M 3/3.5 x 0.6

6/50/60.5/77.5
9 mm/M 3/3.5 x 0.6

6/50/67.5/84.5
9 mm/M 3/3.5 x 0.6

6/42/40.5/54.5
8 mm/M 3/3.5 x 0.6

Rated data

Rated voltage/current/cross-section
Rated impulse voltage VDE 0110/1.89/pollution severity

250 V/8 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/6/8 A/4 mm²
4 kV/3

Further technical data

Tightening torque range Nm
Torque setting with electric screwdriver type DMS 2

0.5...1.0
1

0.5...1.0
1

0.5...1.0
1

0.5...1.0
2

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²
Flexible H07V-K mm²
Flexible H07V-K and ferrule according to DIN 46 228/1
With/without plastic insulating collar mm²
Plug gauge according to IEC 60 947-1 Size
Continuous current of terminal block for conductor size
Continuous current rating of cross-connection 2-pole A
Continuous current rating of cross-connection multipole A

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(QB 2...10) 10

Rated data according to UL/CSA

Voltage/current/conductor size UL
Voltage/current/conductor size CSA

—
—


—
—

—
—

—
—

Ordering data

Pin Type
Right PA
Links PA
Horizontal right PA
Vertical right PA
Vertical right Blue PA
Vertical PA
Vertical left PA



Cat. No. Qty.
0536560000 50
0370460000¹⁾ 50
0370360000¹⁾
1398460000¹⁾ 50

Cat. No. Qty.
0370460000¹⁾ 50
0370360000¹⁾

Cat. No. Qty.
0527760000¹⁾ 50

Cat. No. Qty.
1 x 1 **0587460000** 100
0.8 x 2.4 **0545060000** 100
0.8 x 1.6 **0469360000** 100

DK 4 QT

bridgeable on
both levels

Right

PA

End plate/partition (thickness mm)



PA

Type Cat. No. Qty.
AP (1.5) **0359260000** 20
AP (DK4 QT) **1397160000** 20

Type Cat. No. Qty.
AP (1.5) **0359260000** 20

Type Cat. No. Qty.
AP (1.5) **0359260000** 20

Type Cat. No. Qty.
AP (1.5) **0211360000** 20

Blue PA


AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

Small partition



TSch 4

TSch 4 **0363360000** 100

TSch 4 **0363360000** 100

TSch 4 **0363360000** 100

Cross-connection/covers



QB 4

2-pole

Q 2 **0336400000** 50

Q 2 **0336400000** 50

Q 2 **0336400000** 50

3-pole

Q 3 **0336500000** 50

Q 3 **0336500000** 50

Q 3 **0336500000** 50

4-pole

Q 4 **0336600000** 50

Q 4 **0336600000** 50

Q 4 **0336600000** 50

10-pole

Q 10 **0368600000** 20

Q 10 **0368600000** 20

Q 10 **0368600000** 20

QB 2*

QB 2* **0482700000** 100

QB 2* **0482700000** 100

QB 2* **0482700000** 100

QB 3*

QB 3* **0482800000** 50

QB 3* **0482800000** 50

QB 3* **0482800000** 50

QB 4*

QB 4* **0482900000** 50

QB 4* **0482900000** 50

QB 4* **0482900000** 50

25-pole

QB 25 blank* **0134000000** 20

QB 25 blank* **0134000000** 20

QB 25 blank* **0134000000** 20

Test plug/socket



StB

Plug-test socket without using QL

StB 8.5 (ø23) **0215700000** 50

StB 8.5 (ø23) **0215700000** 50

StB 8.5 (ø2.3) **0215700000** 50



PS

PS 2.3 **0180400000** 20

PS 2.3 **0180400000** 20

PS 2.3 **0180400000** 20



FW/FS

dekafix 6 see "Accessories"

dekafix 6 see "Accessories"

dekafix 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.
** Only to be used with PA-version


¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

Feed-through terminals and disconnect test terminals

with solder connection

SAK 2.5/M.LS


With screen lug



SAK 2.5 L SAK 2.5 L/35



SAK 2.5 LL SAK 2.5 LL/35



SAKR L SAKR L/35

Disconnect terminal



Dimensions/approvals			SAK 2.5/M.LS			SAK 2.5 L SAK 2.5 L/35			SAK 2.5 LL SAK 2.5 LL/35			SAKR L SAKR L/35		
Width/length/height (mm)	with TS 32		6/60/46.5			6/44.5/46.5			6/55/46.5			6.5/50/40.5/54.5 (opened)		
Width/length/height (mm)	with TS 35 x 7.5					6/44.5/40			6/55/40			6.5/50/38/52		
Insulation stripping length/clamping screw/screwdriver blade			12 mm/M 2.5/3.5 x 0.6			12 mm/M 2.5/3.5 x 0.6						8 mm/M 3/3.5 x 0.6		
Rated data														
Rated voltage/current/cross-section			250 V/20 A/2.5/1.5 mm ²			250 V/20 A/2.5/1.5 mm ²			250 V/20 A/1.5 mm ²			250 V/10 A/4/1.5 mm ²		
Rated impulse voltage VDE 0110/1.89/pollution severity			4 kV/3			4 kV/3			4 kV/3			4 kV/3		
Further technical data														
Tightening torque range	Nm		0.4...0.7			0.4...0.7						0.5...1.0		
Torque setting with electric screwdriver type DMS 2			1			1						2/1		
Clampable conductor														
Solid H07V-U	mm ²		0.5...6			0.5...6						0.5...4		
Stranded H07V-R	mm ²		0.5...2.5			0.5...2.5						0.5...4		
Flexible H07V-K	mm ²		0.5...4			0.5...4						0.5...4		
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²		0.5...2.5			0.5...2.5						0.5...4		
Plug gauge according to 60 947-7-1	Size		A 3			A 3						A 3		
Continuous current of terminal block for conductor size														
Continuous current rating of cross-connection 2-pole	A		(Q 2...10) 24			(Q 2...10) 24			(Q 2...10) 24			(QB 2...25) 10		
Continuous current rating of cross-connection multipole	A													
Rated data according to UL/CSA														
Voltage/current/conductor size	UL											300 V/10 A/22...12 AWG		
Voltage/current/conductor size	CSA		300 V/10 A/22...12 AWG			300 V/10 A/22...12 AWG			300 V/10 A/26...12 AWG			300 V/10 A/22...12 AWG		
Ordering data			Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
			KrG	0309120000	100		0351420000	100		0323620000	100			
			Blue KrG				0351470000	100		0323670000	100			
			KrS											
			PA				0351460000 ²⁾ 100	0495060000 ²⁾ 100		0323660000 ²⁾ 100	0567260000 ²⁾ 100		0412360000	100
			Blue PA										0412380000	100
			KrG				0544120000 [*] 100							
			PA											
			Blue PA				0544160000 [*] 100						0412460000 [*] 100	
													0412480000 [*] 100	
End plate/partition (thickness mm)			Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
AP	TW		KrG	AP (1.5)	0309220000 20	AP (1.5)	0309220000 20	AP (1.5)	0309220000 20	AP (1.5)	0309220000 20			
			Blue KrG	AP (1.5)	0309270000 20	AP (1.5)	0309270000 20	AP (1.5)	0309270000 20	AP (1.5)	0309270000 20	AP (1.5)	0211360000 ¹⁾ 20	
			PA			AP (1.5)	0279560000 20	AP (1.5)	0279560000 20	AP (1.5)	0279560000 20	AP (1.5)	0211380000 20	
			Blue PA											
			PA	TW (1.5)	0302860000 20	TW (1.5)	0302860000 20	TW (1.5)	0302860000 20	TW (1.5)	0302860000 20			
			HP	TW (1.0)	0297100000 20	TW (1.0)	0297100000 20	TW (1.0)	0297100000 20	TW (1.0)	0297100000 20			
			HP	TW (2.0)	0607000000 20	TW (2.0)	0607000000 20	TW (2.0)	0607020000 20	TW (2.0)	0607020000 20	TW (2.0)	0607000000 20	
Small partition			TSch 1	0319160000	100	TSch 1	0319160000	100	TSch 1	0319160000	100			
Cross-connection														
Q 3	Q 4	2-pole	Q 2	0337000000	50	Q 2	0337000000	50	Q 2	0337000000	50	QB 2**	0482700000	100
		3-pole	Q 3	0337100000	50	Q 3	0337100000	50	Q 3	0337100000	50	QB 3**	0482800000	50
		4-pole	Q 4	0337200000	50	Q 4	0337200000	50	Q 4	0337200000	50	QB 4**	0482900000	50
		10-pole	Q 10	0368700000	20	Q 10	0368700000	20	Q 10	0368700000	20			
		25-pole										QB 25 blank**	0134000000	20
Test plug/socket														
		Plug-test socket without using QL				StB 8.5(ø23)	0280600000	50	StB 8.5(ø23)	0280600000	50			
		Plug-test-socket for use with QL				StB 29.5(ø4)	0133400000	50	StB 29.5(ø4)	0133400000	50			
						PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
						PS 4	0299600000	20	PS 4	0299600000	20			
Cover														
			AD 4	0303400000	50	AD 4	0303400000	50	AD 4	0303400000	50			
			BSK M3x22	0128900000	100	BSK M3x22	0128900000	100	BSK M3x22	0128900000	100			
Marking tags														
		Print	DEK	Standard	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	DEK 6.5	see "Accessories"	
			1 2 3 4 5 6											
Mounting rails, end brackets, further marking material see "Accessories"														

* Soldering lug on left-hand side
 ** The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.

¹⁾ For TS 32 and TS 35
²⁾ Contact-proof cross-connection with ADP 4 cover profile (see "Accessories")


Disconnect test terminals with solder connections

SAKR L

With 2 StB 6



SAKR LL



SAKR LL

With 2 StB 6



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data

Rated voltage/current/cross-section	250 V/10 A/4/1.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	1

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1		
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3
Continuous current of terminal block for conductor size		
Continuous current rating of cross-connection 2 pole	A	(QB 2...25) 10
Continuous current rating of cross-connection multipole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Type	Qty.
KrG	
Blue KrG	
KrS	
PA	0518160000*100 0183560000 100
Blue PA	
KrG	
KrS	
PA	0572660000 100
Blue PA	

6.5/50/40.5/54.5 (opened)

8 mm/M 3/3.5 x 0.6

0.5...1.0

1

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...25) 10

A

A



6.5/58/40.5/54.5 (opened)

250 V/10 A/1.5 mm²

4 kV/3

0.5...1.0

1

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...25) 10

A

A

300 V/10 A/22...12 AWG

Qty.

KrG

Blue KrG

KrS

PA

Blue PA

KrG

KrS

PA

Blue PA

6.5/58/40.5/54.5 (opened)

-/-/3.5 x 0.6

250 V/10 A/1.5 mm²

4 kV/3

0.5...1.0

1

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...25) 10

A

A

Qty.

KrG

Blue KrG

KrS

PA

Blue PA

KrG


KrS

PA

Blue PA

Blue PA

End plate/partition (thickness mm)



Type Cat. No. Qty.

KrG

Blue KrG

PA

Blue PA

PA

HP

HP

Type Cat. No. Qty.

AP (1.5) 0211320000 20

AP (1.5) 0211360000 20

AP (1.5) 0211380000 20

AP (1.5) 0211380000 20

TW (0.5) 0474700000 20

TW (0.5) 0474700000 20

TW (2.0) 0607000000 20

TW (2.0) 0607000000 20

Type Cat. No. Qty.

AP (1.5) 0211320000 20

AP (1.5) 0211360000 20

AP (1.5) 0211380000 20

AP (1.5) 0211380000 20

TW (0.5) 0474700000 20

TW (0.5) 0474700000 20

TW (2.0) 0607000000 20

TW (2.0) 0607000000 20

Small partition



Cross-connection



QB 3 QB 4 QB 2** 0482700000 100

2-pole QB 3** 0482800000 50

3-pole QB 4** 0482900000 50

4-pole

10-pole QB 25 blank** 0134000000 20

25-pole


Test plug/socket



PS 2.3 0180400000 20

PS 2.3 0180400000 20

Marking tags



DEK

Print

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

PS 2.3 0180400000 20

PS 2.3 0180400000 20

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* Soldering lug on left-hand side


** The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.

Disconnect test terminals with solder connections

SAK-series



Feed-through terminals for initiators and actuators

DLI 2.5





Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.5 x 0.6	

DLI 2.5 LD PNP




Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.5 x 0.6	

DLI 2.5 LD NPN



Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.5 x 0.6	

DLD 2.5



Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.5 x 0.6	

Dimensions/approvals

Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	250 V/20 A/2.5 mm ²
Rated impulse voltage/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm 0.4...0.6
Torque setting with electric screwdriver type DMS 2	1

Clampable conductor

Solid H07V-U	mm ² 0.5...4
Stranded H07V-R	mm ² 0.5...2.5
Flexible H07V-K	mm ² 0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1	mm ² 0.5...2.5
Plug gauge according to 60 947-7-1	Size A 3
Continuous current of terminal for conductor size	20 A/2.5 mm ²
Continuous current rating of cross-connection 2...5-pole	A (Q 2...10) 20
Continuous current rating of cross-connection 6...10-pole	A

Rated data according to UL/CSA

Voltage/current/conductor size	UL 300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA 300 V/10 A/26...12 AWG

Ordering data

	Standard	Cat. No.	Qty.
		1313360000	100
	with diode 1N4007		
	with LED red (5...30 V)	1578510000	100
	with LED green (5...30 V)	1578520000	100
	with LED and diode 1N4007		
	with LED and diode 1N4007		
	Block of 10 ¹⁾	(w/o) 1411360000	10
	Block of 10 ¹⁾	(with dekafix) 1579070000	10
	Fuse inserts		

End plate/Small partition

AP-DLI	AP-DLD	Part-AP	TSch 1
			(thickness 1.5 mm)

Test plug/plug socket

	StB 8.5	PS

Cross-connection

Q 3	
Q 2	
Q 3	
Q 4	
Q 10	
Q 20	

VQB



Snap fit, external cross-connection VQB 1.5.

For cross-connections for more than 20 terminals, replace VH with VH 4.2 (134580) without internal thread

Group marking

WT 4	
SF 10	
SG 10	

Cover

HP 4



Marking tags

						DEK	Standard
--	--	--	--	--	--	-----	----------

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20


WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

Mounting rails, end brackets, further marking material see "Accessories"

1) DLI 2.5/35/10 = Block of 10 with built-in cross-connections * only in upper busbar

Feed-through terminals for initiators and actuators

DLA 2.5



6/65/49
7 mm/M 2.5/3.5 x 0.6

250 V**/17.5 A/2.5 mm²
4 kV/3

0.4...0.6
1

0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm²
(Q 2...20) 20

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

	Cat. No.	Qty.
	1565970000	100

(w. dekafix) **1578380000** 10
(w/o dekafix) **1578390000** 10

Type	Cat. No.	Qty.
AP	1313260000	20

TSch 1	0319160000	100
--------	-------------------	-----

StB8.5*(ø23) **0215700000** 50
PS 2.3 **0180400000** 20


Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

QL 2	0297200000	100
VH 4.2	1345800000	100
VQB1.5/50 BL	1633280000	5
VQB1.5/50 RT	1633290000	5
VQB1.5/50 SW	1635120000	5

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/D



6/65/49
7 mm/M 2.5/3.5 x 0.6

250 V**/17.5 A/2.5 mm²
4 kV/3

0.4...0.6
1

0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm²
(Q 2...20) 20

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

	Cat. No.	Qty.
	1578400000	100

Type	Cat. No.	Qty.
AP	1313260000	20

TSch 1	0319160000	100
--------	-------------------	-----

StB8.5*(ø23) **0215700000** 50
PS 2.3 **0180400000** 20


Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

QL 2	0297200000	100
VH 4.2	1345800000	100
VQB1.5/50 BL	1633280000	5
VQB1.5/50 RT	1633290000	5
VQB1.5/50 SW	1635120000	5

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/LD



6/65/49
7 mm/M 2.5/3.5 x 0.6

5-30 V/17.5 A/2.5 mm²
0.8 kV/3

0.4...0.6
1

0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm²
(Q 2...20) 20

300 V/10 A/26...12 AWG

5-30 V/10 A/26...12 AWG

	Cat. No.	Qty.
	1578430000	100
	1578440000	100

Type	Cat. No.	Qty.
AP	1313260000	20

TSch 1	0319160000	100
--------	-------------------	-----

StB8.5*(ø23) **0215700000** 50
PS 2.3 **0180400000** 20

Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

QL 2	0297200000	100
VH 4.2	1345800000	100
VQB1.5/50 BL	1633280000	5
VQB1.5/50 RT	1633290000	5
VQB1.5/50 SW	1635120000	5

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/LD/D



6/65/49
7 mm/M 2.5/3.5 x 0.6

5-30 V/17.5 A/2.5 mm²
0.8 kV/3

0.4...0.6
1

0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm²
(Q 2...20) 20

300 V/10 A/26...12 AWG

5-30 V/10 A/26...12 AWG

	Cat. No.	Qty.
	1578470000	100
	1578480000	100
	1578490000	10
	1578500000	10

Type	Cat. No.	Qty.
AP	1313260000	20

TSch 1	0319160000	100
--------	-------------------	-----

StB8.5*(ø23) **0215700000** 50
PS 2.3 **0180400000** 20


Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

QL 2	0297200000	100
VH 4.2	1345800000	100
VQB1.5/50 BL	1633280000	5
VQB1.5/50 RT	1633290000	5
VQB1.5/50 SW	1635120000	5

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLD 2.5/PE



6/74.5/49
7 mm/M 2.5/3.5 x 0.6

250 V**/17.5 A/2.5 mm²
4 kV/3

0.4...0.6
1

0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm²
(Q 2...20) 20

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

	Cat. No.	Qty.
	1595950000	100

Type	Cat. No.	Qty.
AP	1595960000	20

AP (Part-AP)	1595970000	
--------------	-------------------	--

TSch 1	0319160000	100
--------	-------------------	-----

StB8.5*(ø23) **0215700000** 50
PS 2.3 **0180400000** 20

Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

QL 2	0297200000	100
VH 4.2	1345800000	100
VQB1.5/50 BL	1633280000	5
VQB1.5/50 RT	1633290000	5
VQB1.5/50 SW	1635120000	5

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000
ADP	0485400000	20
HP 4	0485860000	20

DEK 6	see "Accessories"
-------	-------------------

KDKS1/PE



8/91/65
8 mm/M 3 ² /M 2.5 ³ /3.5 x 0.6

500 V/6.3 A/4 mm²
6 kV/3

0.5...1²/0.4...0.7³
2/1***

0.5...4
0.5...4
0.5...4
A 4 ²/ A 3³

-/-/22...12 AWG

	Cat. No.	Qty.
	9528110000	50

not combine with
DLI / DLA
Wernid **9532450000** 50

Type	Cat. No.	Qty.
AP	9503330000	50

AP Wernid	9532470000	50
-----------	-------------------	----

5 x 20 without core indicator


QB 2	0461100000	50
QB 3	0461200000	50
QB 4	0461300000	50

** If the cross-connection runs via the PE connection of the DLA, or if a pole is generally skipped, the rated voltage is reduced to 30 V-


² A4 clamping position = max 4 mm² ... ³ A3 clamping position = max 2.5 mm² ... ferrule with/without plastic insulating collar

Feed-through terminals for initiators and motors


VLI 1.5



VLI 1.5PE



MAK 2.5



Dimensions/approvals

Width/length/height (mm) with TS 35 x 7.5

Insulation stripping length/clamping screw/screwdriver blade

6/79/64
8 mm/M 2.5/3.5 x 0.6

6/69/63
8 mm/M 2.5/3.5 x 0.6

6/88/64
8 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section

250 V/17.5 A/1.5 mm²

250 V/17.5 A/1.5 mm²

500 V (L-L)/250 V (L-PE)

Rated impulse voltage/pollution severity

4 kV/3

4 kV/3

6 kV/3

Further technical data

Tightening torque range

Nm

0.4...0.6**

0.4...0.6

0.4...0.6

Torque setting with electric screwdriver type DMS 2

1

1

1

Clampable conductor

Solid H07V-U

mm²

0.5...4.0

0.5...4.0

0.5...4.0

Stranded H07V-R

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Flexible H07V-K

mm²

0.5...4

0.5...4

1.5...4

Flexible H07V-K and ferrule DIN 46 228/1

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Flexible H07V-K and ferrule with plastic insul. collar

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Plug gauge according to 60 947-7-1

Size

A3

A3

A3

Continuous current of terminal for conductor size

24 A/2.5 mm²

24 A/2.5 mm²

24 A/4 mm²

Continuous current rating of cross-connection, multipole

A

24

24

Rated data according to UL/CSA

Voltage/current/conductor size

UL

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

Voltage/current/conductor size

CSA

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

Ordering data

Version

PA

Cat. No. Qty.
1633250000 50

Cat. No. Qty.
1633310000 50

Cat. No. Qty.
1615270000 50
 1631650000 50

End plate/partition

End plate

Type Cat. No. Qty.
AP VLI1.5 **1633260000** 20

Type Cat. No. Qty.
APVLI1.5/PE **1633320000** 20

Type Cat. No. Qty.
AP MAK2.5 **1615280000** 20

Partial end plate for VLI1.5 – MAK2.5 combination

TEAP2 MAK2.5 **1633330000** 20

TEAP VLI1.5 **1633270000** 20

TEAP2 MAK2.5 **1633330000** 20

Partial end plate for VLI1.5 – VLI1.5PE combination

TEAP VLI1.5 **1633270000** 20

TEAP1 MAK2.5 **1633340000** 20

TEAP1 MAK2.5 **1633340000** 20

Partial end plate for VLI1.5PE – MAK2.5 combination

Cross-connection

VQB 50-pole, snap-fit, external cross-connection

VQB1.5/50BL* **1633280000** 5

VQB1.5/50BL* **1633280000** 5

VQB1.5/50BL* **1633280000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50SW* **1635120000** 5

VQB1.5/50SW* **1635120000** 5

VQB1.5/50SW* **1635120000** 5



QB 25-pole external cross-connection

QB 25 SW* **0520000000** 20

QB 25 RT* **0520060000** 20

QB 25 BL* **0520080000** 20


Group marking

Tag carrier

for S 10 tags

Marking tags

Print



DEK

Standard

DEK 5 see "Accessories"

DEK 5 see "Accessories"

DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* When using cross-connection bridges, the connected cross-section is reduced by one level
** 0.4...0.45 for lower connection level

Disconnect test terminal against induced high voltage

Measures to minimize risks of electric voltage peaks in control systems of power plants and transforming stations:

- Insulation between installation and control cable by pulling disconnect plugs.
- Grounding of control cable is possible on an appropriate location of the workplace.
- Easy connection of electric isolation of counting, control and communication circuits.

Electricity Supply Industry Standard ESI 12-4 1973

The Electricity Supply Industry Standard ESI 12-4 1973 defines a detailed specification of control and protection equipment. The main functions of these installations are as follows:

- Insulation of the control cables located in front of ground or installation lines with increased potential, which is required to prevent unintentional contact of service staff with live parts.
- Separation of control cables from local control circuits.
- Application also includes test connections for auxiliary control circuits and / or local control circuits.
- Grounding of control cables and / or auxiliary control circuits.
- Bundled disconnection of all auxiliary control circuits from potential earth.
- A test voltage can be applied using the screening connection of the control cable, which is normally routed on the enclosure, with the help of an appropriate separation. This permits to check whether the screening line is correctly functioning. For this test, an insulated feed-through plate is required.

ESI 12-4:

"Terminating Equipment for Pilot Cables subject to Induced Transient Voltages exceeding 650 V rms".


PPT/35



SAKH 6



Dimensions/approvals

Width/length/height (mm) with TS 35 x 7.5 
Insulation stripping length/clamping screw/screwdriver blade

15/138/79
12 mm

12 mm

Rated data according to IEC 60 947-7-1

Rated voltage/current
Rated impulse voltage/pollution severity

15 kV ac (ESI 12-4)**/30 A

1 kV ac / 1.5 kV dc / 47 A
>15 kV (from terminal to terminal)

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²

0.5...10
0.5...10*

0.5... 6
0.5... 6

Ordering data

Version

 Cat. No. Qty.
PPT/35 **3835020000** 10
incl. disconnect plug and displacement tool (if min. 10 items are ordered)

 Cat. No. Qty.
SAKH 6 **0126600000** 50

End plate

EP

AP/PPT (3) **3835120000** 10

AP **0131700000** 20

Disconnect plug

TST/PPT **3835360000** 10

Displacement tool

PA

PH/PPT **3835260000** 10
The disconnect plug may only be removed with the displacement tool.

Test plug/socket

PS (4) **0299600000** 20
StB 17 **0147100000** 50


Insulated mounting rail

PVC 35 x 1.5 mm

TSK 35 **0514300000** 1

Marking tags

Print



DEK

Standard

DEK 5 see "Accessories"

DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series

* Also two push-on tabs are possible
** mounted on an insulated mounting rail

Rail mounting TS 15

Feed-through terminals Protective conductor terminals Fuse terminals Disconnect test terminals

AKZ 1.5 AKZ 1.5/10



AKZ 2.5



AKZ 4 AKZ 4/10 AKZ 4 Wemid



AKZ 4 for test adapter AKZ 4/10 for test adapter



Max. technical data

Dimensions/approvals

Width/length/height (mm) with TS 15

Insulation stripping length/clamping screw/screwdriver blade

Rated data VDE 0611 Part 1/8.92/IEC 60 947-7-1

Rated voltage/current/cross-section

Rated impulse voltage / pollution severity

Further technical data

Tightening torque range Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U mm²

Stranded H07V-R mm²

Flexible H07V-K mm²

Flexible H07V-K and ferrule DIN 46 228/1 mm²

Flexible H07V-K and ferrule with plastic insul. collar mm²

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size

Continuous current rating of cross-connection 2-pole A

Continuous current rating of cross-connection multipole A

Rated data according to UL/CSA

Voltage/current/conductor size UL

Voltage/current/conductor size CSA

Ordering data

Type	TS 15	Cat. No.	Qty.
KrG			
PA		0340460000	100
Blue PA		0340480000	100
PA	(10pol./no mk.)	0358060000	10
PA	(10pol./w.mk.)	0358160000	10

21.5 A / 2.5 mm²



5/25/25

7 mm/M 2.5/3.0 x 0.5

250 V/17.5 A/1.5 mm²

4 kV/3

0.4...0.6

1

0.5...2.5

1.5

0.5...1.5

0.5...1.5

0.5...1.5

0.2...2.5 / A 1

24

24

150 V/15 A/22...14 AWG

300 V/10 A/24...16 AWG

TS 15 Cat. No. Qty.

26 A / 4 mm²



5/25.5/28

7 mm/M 2.5/3.0 x 0.5

250 V/24 A/2.5 mm²

4 kV/3

0.4...0.6

1

0.5...4

1.5...2.5

0.5...4

0.5...2.5

0.5...2.5

0.13...4.0 / A 3

24

24

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

TS 15 Cat. No. Qty.

(with pin) **0697160000** 100

(with pin) **0697180000** 100

(without pin) **0175960000** 100

AKZ 2.5 w. AP **0385860000** 50

38.5 A / 6 mm²



6/27/30

8 mm/M 3/3.5 x 0.6

400 V/32 A/4 mm²

6 kV/3

0.5...1.0

2

0.5...6

1.5...4

0.5...4

0.5...4

0.5...4

0.2...6.0 / A 3

32

32

300 V/27 A/22...12 AWG

300 V/10 A/24...12 AWG

TS 15 Cat. No. Qty.

0294320000 100

0294360000 100

0294380000 100

(10pol./no mk.) **0359560000** 10

(10pol./w.mk.) **0359660000** 10

AKZ 4 Wemid **9537110000** 100

38.5 A / 6 mm²



60/27/30

9 mm/M 3/3.5 x 0.6

500 V/32 A/4 mm²

6 kV/3

0.5...1.0

2

0.5...6

1.5...4

0.5...4

0.5...4

0.5...4

0.2...6.0 / A 3

32

32

300V/27 A/22...12 AWG

300 V/10 A/24...12 AWG

TS 15 Cat. No. Qty.

for test adapter **1538260000** 100

w.mk./f.test ad. **1489360000** 10

ATA1,10-pole **1633240000** 5

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG		
Wemid		
PA	AP (1.5) 0340560000	50
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG		
PA		
Blue PA		

Small partition

Type	Cat. No.	Qty.
PA		

Cross-connection

Type	Cat. No.	Qty.
Q 2	0368200000	50
Q 3	0368300000	50
Q 4	0368400000	50
Q 5	0660300000	20
Q 10	0368500000	20

Switchable cross-connection link

Type	Cat. No.	Qty.
VL		
BS		
VH		

Cover/Profiled material for covers for finger-safety*

Type	Cat. No.	Qty.

Test plug/socket

Type	Cat. No.	Qty.
StB	Plug test socket can be used without QL	StB 8.5 0215700000 50
PS		
K sleeve		PS 2.3 0180400000 20

Marking tags

Type	Cat. No.	Qty.
DEK	Standard	DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* not for terminals made from PA

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG		
Wemid		
PA	AP (2.5) 0697360000	50
Blue PA	AP (2.5) 0697380000	50

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG		
PA		
Blue PA		

Small partition

Type	Cat. No.	Qty.
PA		

Cross-connection

Type	Cat. No.	Qty.
Q 2	0368200000	50
Q 3	0368300000	50
Q 4	0368400000	50
Q 5	0660300000	20
Q 10	0368500000	20

Switchable cross-connection link

Type	Cat. No.	Qty.
VL		
BS		
VH		

Cover/Profiled material for covers for finger-safety*

Type	Cat. No.	Qty.

Test plug/socket

Type	Cat. No.	Qty.
StB	Plug test socket can be used without QL	StB 8.5 0215700000 50
PS		
K sleeve		PS 2.3 0180400000 20

Marking tags

Type	Cat. No.	Qty.
DEK	Standard	DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* not for terminals made from PA

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG		
Wemid		
PA	AP (1.5) 0294420000	20
Blue PA	AP (1.5) 0294460000	20
Blue PA	AP (1.5) 0294480000	20

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG		
PA		
Blue PA		

Small partition

Type	Cat. No.	Qty.
PA		

Cross-connection

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 5	0660300000	20
Q 10	0368600000	20

Switchable cross-connection link

Type	Cat. No.	Qty.
VL	0446700000	50
VH	0446600000	50
BS	M 2.5x14 0266800000	100

Cover/Profiled material for covers for finger-safety*

Type	Cat. No.	Qty.

Test plug/socket

Type	Cat. No.	Qty.
StB	Plug test socket can be used without QL	StB 8.5 0215700000 50
PS		
K sleeve		PS 2.3 0180400000 20

Marking tags

Type	Cat. No.	Qty.
DEK	Standard	DEK 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

*) Length: 300 mm

Rail mounting TS 15

AK 4 AK 4/10



38.5 A / 6 mm²

UL	CE
60/32/34	
9 mm/M 3/3.5 x 0.6	
690 V/32 A/4 mm ²	
8 kV/3	
0.5...1.0	
2	
0.5...6	
1.5...4	
0.5...4	
0.5...4	
0.5...4	
0.5...4	
0.2...6.0 / A 3	
20	
20	
TS 15	Cat. No. Qty.
0489560000	100
(10pol./no.mk.)	0366560000 10
(10pol./w.mk.)	0469560000 10

Type	Cat. No.	Qty.
BB 3 (8.0)	0366660000	50
combined AP + end brackets		
TW/AP (1.5)	1331760000	20
TSch 4	0363360000	100
Q 2	0369000000	50
Q 3	0369100000	50
Q 4	0369200000	50
Q 10	0369300000	20
AD 4	0303400000	50
BSKM 25x18	0303300000	100
StB 8.5	0215700000	50
PS 2.3	0180400000	20
DEK 6	see "Accessories"	

AKE 2.5



UL	CE
5/28/27	
7 mm/M 2.5/3.0 x 0.5	
IEC 60 947-7-2	
-/-/2.5 mm ²	
4 kV/3	
0.4...0.6	
1	
0.5...4	
1.5...2.5	
0.5...4	
0.5...2.5	
0.5...2.5	
0.13...4.0 / A 3	
-/-/26...12 AWG	
-/-/26...12 AWG	
TS 15	Cat. No. Qty.
1303360000	100
(green/yellow)	

Type	Cat. No.	Qty.
TS 15	Cat. No. Qty.	
1303360000	100	
(green/yellow)		

AKE 4



UL	CE
7/32/34	
9 mm/M 3/3.5 x 0.6	
IEC 60 947-7-2	
-/-/4 mm ²	
8 kV/3	
0.5...1.0	
2	
0.5...6	
1.5...4	
0.5...4	
0.5...2.5	
0.5...2.5	
0.13...4.0 / A 3	
-/-/22...12 AWG	
-/-/26...12 AWG	
TS 15	Cat. No. Qty.
0380260000	100
(green/yellow)	

Type	Cat. No.	Qty.
TS 15	Cat. No. Qty.	
0380260000	100	
(green/yellow)		

AKE 4 MS



		
7/27.5/30		
9 mm/M 3/3.5 x 0.6		
-/-/4 mm ²		
0.8...1.6		
3		
0.5...4		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.5...4.0 / A 3		
-/-/22...14 AWG		
 TS 15	Cat. No.	Qty.
0211200000		50

Type	Cat. No.	Qty.
TS 15	Cat. No. Qty.	
0211200000	50	

ASK 1 Fuse terminal



UL	CE
8/58/34	
9 mm/M 3/3.5 x 0.6	
500 V/6.3 A ¹ /4 mm ²	
6 kV/3	
0.5...1.0	
2	
0.5...4	
1.5...4	
0.5...4	
0.5...2.5	
0.5...2.5	
0.13...4.0 / A 3	
(QB 2...4) 10	
300 V/10 A/22...12 AWG	
300 V/6.3 A/26...12 AWG	
TS 15	Cat. No. Qty.
0376860000	100
5 x 20 without indicator	

Type	Cat. No.	Qty.
AP (1.5)	0380360000	20
QB 2 ¹⁾ insul.	0461100000	50
QB 3 ¹⁾ insul.	0461200000	50
QB 4 ¹⁾ insul.	0461300000	50
3-pole ganging with tag bar SchS 2, snapped onto three disconnect levers (Cat. No. 0337400000)		
K sleeve	0553300000	100
DEK 6.5	see "Accessories"	

SAKR Isolating blade terminal with 2 sockets or with 2 clamping screws



6.5/42/45		
8 mm/M 3/3.5 x 0.6		
400 V ²⁾ /10 A/4 mm ²		
6 kV/3		
0.5...1.0		
2		
0.5...4		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.13...4.0 / A 3		
(QB 2...4) 10		
	TS 15	Cat. No.
		Qty.
with 2 StB	0412860000	100
w. clamp.screw	0412760000	100

Type	Cat. No.	Qty.
AP (1.5)	0211360000	20
QB 2 ¹⁾ insul.	0482700000	50
QB 3 ¹⁾ insul.	0482800000	50
QB 4 ¹⁾ insul.	0482900000	50
QB 25 ¹⁾ blank	0134000000	20
PS 2.3	0180400000	20
DEK 6.5	see "Accessories"	

¹⁾ The conductor cross-section is * With contact sleeve 19 A reduced to max. 2.5 mm² when QB is used.

²⁾ As disconnect test terminal: rated voltage 250 V

Feed-through terminals for TS 15

Tab connection Solder connection

AKZ 4 SS

AKZ 4 SS

AKZ 4 S

AKZ 4 SF



Dimensions/approvals		UL	UL	UL	UL
Width/length/height (mm)	with TS 15	6/28.5/30.5	6/28.5/30.5	6/27/30	6/27/30
Insulation stripping length/clamping screw/screwdriver blade				9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Rated data					
Rated voltage*/current/cross-section		400 V/8 A/2.5/1 mm ²	400 V/8 A/1 mm ²	400 V/8 A/4/1 mm ²	400 V/8 A/4/1 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data					
Tightening torque range Nm				0.5...1.0	0.5...1.0
Torque setting with electric screwdriver type DMS 2				2	2
Clampable conductor					
Solid H07V-U mm ²				0.5...4	0.5...4
Stranded H07V-R mm ²				1.5...4	1.5...4
Flexible H07V-K mm ²		Tab connec. 6.3 and 2.8 mm	Tab connection 2.8 mm	0.5...4	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²				0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar mm ²				0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size				0.2...4/A 3	0.2...4/A 3
Continuous current rating of cross-connection 2-pole A		20	20	20	20
Continuous current rating of cross-connection multipole A		20	20	20	20
Rated data according to UL/CSA					
Voltage/current/conductor size UL		150 V/10 A/22...12 AWG	150 V/10 A/22...12 AWG	150 V/20 A/22...12 AWG	
Voltage/current/conductor size CSA		300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG
Ordering data		Type	Type	Type	Type
		TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.
		KrG			
		PA	0324560000 100	0324460000 100	0324460000 100
		Blue PA			0158760000 100
		PA			
End plate (thickness mm)		Type	Type	Type	Type
		PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20
		PA			
		Blue PA			
		HP			
		HP			
		BB			
Partition (thickness mm)		Type	Type	Type	Type
		PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50
		HP			
		HP			
Small partition					
Cross-connection					
		Q 2 0369000000 50	Q 2 0369000000 50	Q 2 0336400000 50	Q 2 0336400000 50
		Q 3 0369100000 50	Q 3 0369100000 50	Q 3 0336500000 50	Q 3 0336500000 50
		Q 4 0369200000 50	Q 4 0369200000 50	Q 4 0336600000 50	Q 4 0336600000 50
		Q 10 0369300000 20	Q 10 0369300000 20	Q 10 0368600000 20	Q 10 0368600000 20
Switchable cross-connection link					
		VL 2 0446700000 50	VL 2 0446700000 50	VL 2 0446700000 50	VL 2 0446700000 50
		BS 0446600000 50	BS 0446600000 50	BS 0446600000 50	BS 0446600000 50
		VH 10 0266800000 100	VH 10 0266800000 100	VH 10 0266800000 100	VH 10 0266800000 100
		BS M 25x14 0266800000 100	BS M 25x14 0266800000 100	BS M 25x14 0266800000 100	BS M 25x14 0266800000 100
Test plug/socket					
		StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50
		PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
Cover					
Insulation sleeves					
		IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100
		IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100
Marking tags		Print	Print	Print	Print
		DEK Standard	DEK 6 see "Accessories"	DEK 6 see "Accessories"	DEK 6 see "Accessories"
		1 2 3 4 5 6			
Mounting rails, end brackets, further marking material see "Accessories"					

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals for TS 15

AL 1




6.5/32/21		
400 V/16 A/1 mm ²		
6 kV/3		
0.5...1		
0.5...1		
TS 15		
Cat. No.	Qty.	
0137320000	100	
Type		
Cat. No.	Qty.	
EP (1.0)	0164100000	100
EP (1.0) (type 1)	0164500000	100
TW (0.5)		
0166800000	50	
DEK 6.5		
see "Accessories"		

AKZ 1.5 L



		
5/34.5/25		
7 mm / M 2.5 / 3.0 x 0.5		
250 V/16 A/1.5 mm²		
4 kV/3		
0.4...0.7		
1		
0.5...2.5		
1.5		
0.5...1.5		
0.5...1.5		
0.5...1.5		
0.2...2.5 / A 1		
24		
24		
150 V/10 A/24...16 AWG		
	TS 15	Cat. No. Qty.
	0340160000	100
Type	Cat. No.	Qty.
AP (1.5)	0329660000	20
TW (0.5)	0166800000	50
Q 2	0368200000	50
Q 3	0368300000	50
Q 4	0368400000	50
Q 10	0368500000	20
StB 8.5	0215700000	50
PS 2.3	0180400000	20
DEK 5 see "Accessories"		

AKZ 4 L



		
6/35.5/30		
9 mm / M 3 / 3.5 x 0.6		
250 V/16 A/4/1.5 mm ²		
4 kV/3		
0.5...1.0		
2		
0.5...4		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.2...4.0 / A 3		
20		
20		
300 V/20 A/22...12 AWG		
300 V/10 A/24...12 AWG		
 TS 15	Cat. No.	Qty.
	0334820000	100
	0334860000	100
Type	Cat. No.	Qty.
AP (1.5)	0294420000	20
AP (1.5)	0294460000	20
AP (1.5)	0294480000	20
TW (0.5)	0348260000	50
TSch 4	0363360000	100
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20
VL 2	0446700000	50
VH 10	0446600000	50
BS M 2.5 x 14	0266800000	100
StB 8.5	0215700000	50
PS 2.3	0180400000	20
AD 4	0303400000	50
BSKM 25x18	0303300000	100
DEK 6 see "Accessories"		

AKZ 4 LL



		
6/44/30		
250 V/16 A/1.5 mm ²		
4 kV/3		
0.5...1.5		
1.5		
0.5...1.5		
0.2...2.5 / -		
20		
20		
300 V/20 A/22...12 AWG		
300 V/10 A/24...12 AWG		
	TS 15	Cat. No.
		Qty.
0346460000		100
Type	Cat. No.	Qty.
AP (1.5)	0294460000	20
TW (0.5)	0348260000	50
TSch 4	0363360000	100
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20
V_L 2	0446700000	50
VH 10	0446600000	50
BSM 2.5x14	0266800000	100
StB 8.5	0215700000	50
PS 2.3	0180400000	20
AD 4	0303400000	50
BSKM 25x18	0303300000	100
DEK 6 see "Accessories"		

SAK-series

Feed-through terminals for TS 15

Solder connection
Spring-clip connection
acc. to DIN 41611 Part 4
Wrap connection
acc. to DIN/IEC 352 Part 1

AKZ 1.5 T



AKZ 1.5 T




AKZ 1.5 T



AKZ 2.5 K




Dimensions/approvals		9A ⑥	9A	9A ⑥	9A ⑥									
Width/length/height (mm)	with TS 15	5/25/45	5/25/39.5	5/28/44	5/26/46.7									
Pin size		0.8 x 1.6	1 x 1	0.8 x 1.6	0.8 x 1.6									
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5									
Rated data														
Rated voltage/current/cross-section		125 V/8 A/1.5 mm²	125 V/8 A/1.5 mm²	125 V/8 A/1.5 mm²	125 V/10 A/2.5 mm²									
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3	2.5 kV/3	2.5 kV/3	2.5 kV/3									
Further technical data														
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7	0.4...0.6									
Torque setting with electric screwdriver type DMS 2		1	1	1	1									
Clampable conductor														
Solid H07V-U	mm²	0.5...2.5	0.5...2.5	0.5...2.5	0.5...4									
Stranded H07V-R	mm²	1.5	1.5	1.5	1.5...2.5									
Flexible H07V-K	mm²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Flexible H07V-K and ferrule DIN 46 228/1	mm²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Flexible H07V-K and ferrule with plastic insul. collar	mm²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A1	0.13...2.5 / A1	0.13...2.5 / A1	0.13...4.0 / A3									
Continuous current rating of cross-connection 2-pole	A	24	24	24	24									
Continuous current rating of cross-connection multipole	A	24	24	24	24									
Rated data according to UL/CSA														
Voltage/current/conductor size	UL	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG									
Voltage/current/conductor size	CSA	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/26...10 AWG									
Ordering data		Pin versions	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	Mounting, horizontal	0.6 x 0.6	AKZ 1.5 T	0442560000	100	AKZ 1.5 T	0483660000	100	AKZ 1.5 T	0400460000	100	AKZ 1.5 T	0400360000	100
	Mounting, vertical	1.0 x 1.0	AKZ 1.5 T	0357960000	100	AKZ 1.5 T	0357860000	100	AKZ 1.5 T			AKZ 2.5 K	0696260000	100
		0.8 x 1.6 horizont.	AKZ 1.5 W	0329460000	100									
		0.8 x 1.6 vertical												
		0.8 x 2.4 horizontal												
		0.8 x 2.4 vertical												
End plate (thickness mm)		PA	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (2.5)	0697260000	50
Partition (thickness mm)		PA										TW (1.5)	0318560000	20
Small partition														
Cross-connection														
	2-pole	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50	
	3-pole	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50	
	4-pole	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50	
	10-pole	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20	
Switchable cross-connection link														
	VL													
	BS													
	VH													
Test plug/socket														
	StB	Plug test socket ø 2.3	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
	PS		PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
Marking tags		Print												
	DEK	Standard	DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 5	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"														

Feed-through terminals for TS 15

AKZ 2.5 K



AKZ 2.5 K



AKZ 4 T



AKZ 4 T



AKZ 4 T



AKZ 4 ST



					
5/26/46.7	5/47.5/27	6/27/48.5	6/27/50.5	6/27/57.8	6/27/50.2
0.8 x 1.6	0.8 x 1.6	1 x 1	0.8 x 1.6	0.8 x 2.4	0.8 x 1.6
7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	–
250 V/8 A/2.5 mm²	250 V/8 A/2.5 mm²	250 V/10 A/4 mm²	250 V/10 A/4 mm²	250 V/10 A/4 mm²	250 V/10 A/2.5 mm²
4 kV/3	4 kV/3	4 kV/3	4 kV/3	4 kV/3	4 kV/3
0.4...0.6	0.4...0.6	0.5...1.0	0.5...1.0	0.5...1.0	
1	1	2	2	2	
0.5...4	0.5...4	0.5...4	0.5...4	0.5...4	
1.5...2.5	1.5...2.5	1.5...4	1.5...4	1.5...4	
0.5...2.5	0.5...2.5	0.5...4	0.5...4	0.5...4	
0.5...2.5	0.5...2.5	0.5...4	0.5...4	0.5...4	
0.5...2.5	0.5...2.5	0.5...4	0.5...4	0.5...4	
0.13...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3	0.5...2.5 / -
24	24	20	20	20	20
24	24	20	20	20	20
300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/24...12 AWG
300 V/10 A/26...10 AWG	300 V/10 A/26...10 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG
TypeCat. No.Qty.	TypeCat. No.Qty.	TypeCat. No.Qty.	TypeCat. No.Qty.	TypeCat. No.Qty.	TypeCat. No.Qty.
AKZ 2.5 K0695460000100		AKZ 4 T0445860000100			AKZ 4 ST0439260000100
	AKZ 2.5 K0695960000100		AKZ 4 T0344160000100		
			AKZ 4 T0344060000100		
AKZ 2.5 K0695660000100	AKZ 2.5 K0696160000100			AKZ 4 T0366460000100	
				AKZ 4 T0461660000100	
AP (2.5)069726000050	AP (2.5)069726000050	AP (1.5)029446000020	AP (1.5)029446000020	AP (1.5)029446000020	AP (1.5)029446000020
TW (1.5)031856000020	TW (1.5)031856000020	TW (1.5)034826000050	TW (1.5)034826000050	TW (1.5)034826000050	TW (1.5)034826000050
		TSch 40363360000100	TSch 40363360000100	TSch 40363360000100	
Q 2036820000050	Q 2036820000050	Q 2033640000050	Q 2033640000050	Q 2033640000050	Q 2036900000050
Q 3036830000050	Q 3036830000050	Q 3033650000050	Q 3033650000050	Q 3033650000050	Q 3036910000050
Q 4036840000050	Q 4036840000050	Q 4033660000050	Q 4033660000050	Q 4033660000050	Q 4036920000050
Q 10036850000020	Q 10036850000020	Q 10036860000020	Q 10036860000020	Q 10036860000020	Q 10036930000020
		VL 2044670000050	VL 2044670000050	VL 2044670000050	
		VH 10044660000050	VH 10044660000050	VH 10044660000050	
		BS M 2.5x140266800000100	BS M 2.5x140266800000100	BS M 2.5x140266800000100	
StB 8.5021570000050	StB 8.5021570000050	StB 8.5021570000050	StB 8.5021570000050	StB 8.5021570000050	StB 8.5021570000050
PS 2.3018040000020	PS 2.3018040000020	PS 2.3018040000020	PS 2.3018040000020	PS 2.3018040000020	PS 2.3018040000020
DEK 5see "Accessories"	DEK 5see "Accessories"	DEK 6see "Accessories"	DEK 6see "Accessories"	DEK 6see "Accessories"	DEK 6see "Accessories"

Feed-through terminals for TS 15

for temperature measuring circuits


AKZ 4/TC



Weidmüller's thermocouple terminals are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path. This high measuring precision is necessary for, e.g. test beds for aircraft engines, for complicated chemical processes, control systems, etc.

- Busbar material corresponds to thermal and compensating conductors
- Clear thermocouple marking
- 2-pole blocks per thermocouple
- Row width 14 mm, incl. end plate

Configuration of a temperature measuring circuit

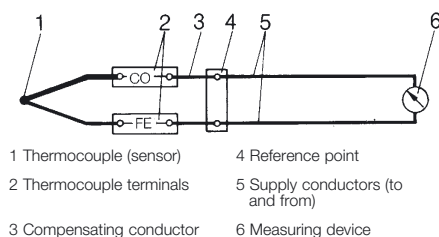

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device. Thermocouple terminals are required for the construction of temperature measuring circuits.


Dimensions		
Width/length/height (mm)	with TS 15	14/27/30
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6
Rated data		
Rated voltage/current/cross-section		~/~/4 mm²
Further technical data		
Tightening torque range	Nm	0.5...1
Torque setting with electric screwdriver type DMS 2		2
Clampable conductor		
Solid H07V-U	mm²	0.5...4
Stranded H07V-R	mm²	1.5...4
Flexible H07V-K	mm²	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm²	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm²	0.5...2.5
Plug gauge acc. to IEC 60 947-1	Size	A 3
Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2-pole	A	
Continuous current rating of cross-connection multipole	A	
Ordering data		
Version		TS 15 Cat. No. Qty.
for thermocouples	Type J Fe – CuNi	1627010000 20
Acc. to IEC 584 Type T	Cu – CuNi	on demand
(DIN 43710) Type K	NiCr – Ni	1677130000 20
Type E	NiCr – CuNi	on demand

End plate		Cat. No.	Qty.
AP (thickness 1.5 mm)	PA	0294460000	20
Partition			
TW (thickness 0.5 mm)	PA	0348260000	50

Thermocouple, type J	
Thermocouple acc. to IEC 584 (DIN 43 710)	Busbar
	Constantan (CuNi)
	Iron (Fe)



Marking tags		Print
Material V0	DEK 5/6	1789590000 500



Mounting rails, end brackets, further marking material see "Accessories"

Multipole terminal blocks




Screw connection

MK 2/12

MK 10/14

MK 3/12

MK 4/16

[illegible]

Multipole terminal blocks

Screw/tab connection

MK 5/2

KS 2...10

BK 2...12

MK 6/2...6/6



Dimensions/approvals

Width/length/height (mm)		40/18/15.5	see table below	see table below	see table below
Insulation stripping length/clamping screw/screwdriver blade		5 mm/M 2.5/3.5 x 0.6	8 mm/M 3/4.0 x 0.8	8 mm/M 3/4.0 x 0.8	9 mm/M 4/4.0 x 0.8
Rated data according to IEC 60 947-7-1					
Rated voltage/current/cross-section		500 V/24 A/2.5 mm ²	500 V/24 A/2.5 mm ²	400 V/32 A/4 mm ²	690 V/41 A/6 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	8 kV/3
Further technical data					
Tightening torque range	Nm	0.4...0.45	0.5...0.7	0.5...0.7	1.2...2.0
Torque setting with electric screwdriver type DMS 2		1	2	2	4
Clampable conductor					
Solid H07V-U	mm ²	0.5...4	0.5...4	0.5...4	0.5...6
Stranded H07V-R	mm ²	1.5...2.5	1.5...2.5	1.5...4	1.5...6
Flexible H07V-K	mm ²	0.5...2.5	0.5...2.5	0.5...4	0.5...6
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...1.5	0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...1.2	0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.2...4.0 / A 2	0.2...4.0 / A 2	0.33...4.0 / A 3	0.33...6.0 / A 3

Rated data according to UL/CSA

Voltage/current/conductor size	UL		300 V/20 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/30 A/22...10 AWG
Voltage/current/conductor size	CSA		300 V/25 A/24...12 AWG	300 V/10 A/22...12 AWG	300 V/40 A/22...10 AWG

Ordering data

Versions



	Cover D 2 (for MK 5/2)	2-pole	MK 5/2 KrG	0243820000	100	KS 2 KrG ²⁾	0134420000	100	BK 2 KrG	0624720000	50	MK 6/2 KrG	0620420000	50	
		Cover D 4 (for KS 4)	3-pole							BK 3 KrG	0624920000	50	MK 6/3 KrG	0620320000	50
			4-pole				KS 4 KrG ²⁾	0140320000	50	BK 4 KrG	0625120000	50	MK 6/4 KrG	0620220000	20
			4-pole												
			6-pole				KS 6 KrG ²⁾	0140620000	50	BK 6 KrG	0625220000	50	MK 6/6 KrG	0620120000	20
			6-pole												
			8-pole												
			8-pole												
			10-pole				KS 10 KrG ²⁾	0141620000	20						
			10-pole				Cover		Cover		BK 12 KrG	0625320000	50		
12-pole						D2 (for MK 5/2)	0244060000	50	D 2 (for KS 2)	0134500000	100				
							D 4 (for KS 4)	0140500000	50						
							D 6 (for KS 6)	0140800000	50						
							D10 (for KS 10)	0141800000	20						




Cover D 2
(for MK 5/2)




Cover D 4
(for KS 4)



Dimensions	Type	a	b
	KS 2	42	32
	KS 4	66	56
	KS 6	90	80
	KS 10	138	128



Dimensions	Type	a	b
	BK 2	20	-
	BK 3	31	11
	BK 4	38	18
	BK 6	52	32
	BK 12	92	72.5



Dimens. Length/attach. dim.	Type	KrG
	MK 6/2	23.5
	MK 6/3	36.5 13
	MK 6/4	49.5 26
	MK 6/6	75.5 52

Expansion rivet

Marking strips

printed
1 ...

unprinted

ELSb 2	0143200000	50
ELSb 4	0143300000	50
ELSb 6	0143400000	50
ELSb 10	0143500000	50
ELSo 2	0142800000	50
ELSo 4	0142900000	50
ELSo 6	0143000000	50
ELSo 10	0143100000	50

BSTb 28/2	0203600000	50
BSTb 28/3	0203800000	50
BSTb 28/4	0197300000	50
BSTb 28/6	0197500000	50
BSTb 28/12	0198800000	50
BSTo 28/2	0203500000	50
BSTo 28/3	0203700000	50
BSTo 28/4	0197200000	50
BSTo 28/6	0197400000	50
BSTo 28/12	0198700000	50

BSTb 17/6	0304600000	50
-----------	------------	----


Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Projecting length = 1 mm. To be considered for the last terminal in a row!
Printed on top on request

²⁾ Please order cover and marking strips separately.

Multipole terminal blocks


MF 1/6...1/12



SLS 2/2



SLS 2/4



Max. technical data

Dimensions/approvals

Width/length/height (mm)

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage²⁾/current/cross-section

Rated impulse voltage VDE 0110/1.89/pollution severity

Further technical data

Tightening torque range

Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U

mm²

Stranded H07V-R

mm²

Flexible H07V-K

mm²

Flexible H07V-K and ferrule DIN 46 228/1

mm²

Flexible H07V-K and ferrule with plastic insul. collar

mm²

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size

Rated data according to UL/CSA

Voltage/current/conductor size

UL

Voltage/current/conductor size

CSA

Ordering data

PA



see below



see below

8 mm/M 3.5/4.0 x 0.8

400 V²⁾/16 A/2.5/1 mm²

6 kV/3

0.8...1.6

3

0.5...4

1.5...4

0.5...4

0.5...4

0.5...4

0.33...4.0 / A 3

300 V/10 A/24...12 AWG

300 V/10 A/22...10 AWG

300 V/10 A/22...10 AWG


Type Cat. No. Qty.

SLS 2/2 KrG³⁾ 0213420000 100

SLS 2/4 KrG 0240420000 50



SLS 2/4 KrG 0480320000 50

Slotted



Dimensions

Type	a	b	c	d
MF 1/6	52	34	9.5	6.5
MF 1/8	68	50	9.5	6.5
MF 1/12 113 ^{+0.5}	102	8	7.5	



Expansion rivet/insulation sleeve

IH

IH 2.8 0386060000 100

IH 6.3 0386260000 100

SN 0200100000 500

IH 2.8 0386060000 100

IH 6.3 0386260000 100

Cover/marking strips

BSTb 10/6 0240900000 50

BSTb 10/8 0241100000 50

BSTb 10/12 0209500000 50

BSTo 10/6 0240800000 50

BSTo 10/8 0241000000 50

BSTo 10/12 0209400000 100

Mounting rails, end brackets, further marking material see "Accessories"

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

²⁾ Single tab
³⁾ Double tab

Multipole terminal blocks





Screw, solder, tab connection

MKL 2/12

MF 2/12

MKL 3/12

MKL 4/16



Dimensions/approvals														
Width/length/height (mm)			88/23/15			75/24/6			110/23/16			103/24/16.5		
Insulation stripping length/clamping screw/screwdriver blade			5 mm/M 2.5/3.5 x 0.6			5 mm			5mm/M 2.5/3.5 x 0.6			5mm/M 2.5/3.5 x 0.6		
Rated data														
Rated voltage*/current/cross-section			125 V/20 A/2.5/1.5/1 mm²			63 V/17.5 A/1.5/1 mm²			400 V*/20 A/2.5/1.5/1 mm²			400 V/20 A/2.5/1.5/1 mm²		
Rated impulse voltage VDE 0110/1.89/pollution severity			2.5 kV/3			1.5 kV/3			6 kV/3			6 kV/3		
Further technical data														
Tightening torque range			Nm 0.4...0.45						0.4...0.45			0.4...0.45		
Torque setting with electric screwdriver type DMS 2			1						1			1		
Clampable conductor														
Solid H07V-U			mm² 0.5...2.5						0.5...4			0.5...4		
Stranded H07V-R			mm² 1.5...2.5						1.5...2.5			1.5...2.5		
Flexible H07V-K			mm² 0.5...2.5						0.5...2.5			0.5...2.5		
Flexible H07V-K and ferrule DIN 46 228/1			mm² 0.5...2.5						0.5...1.5			0.5...1.5		
Flexible H07V-K and ferrule with plastic insul. collar			mm² 0.5...2.5						0.5...1.5			0.5...1.5		
Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1			Size 0.2...2.5 / A 2						0.33...4.0 / A 2			0.33...4.0 / A 2		
Rated data according to UL/CSA														
Voltage/current/conductor size			UL						300 V/25 A/22...12 AWG			300 V/25 A/22...12 AWG		
Voltage/current/conductor size			CSA						300 V/25 A/22...12 AWG			150 V/15 A/22...12 AWG		
Ordering data		Versions	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat.No	Qty.	Type	Cat. No.	Qty.
Horizontal		2-pole							MKL 3/2 KrG	0274920000**	100			
Other number of poles on demand		4-pole							MKL 3/4 KrG	0275120000**	100			
		6-pole							MKL 3/6 KrG	0275320000**	50			
		12-pole	MKL 2/12 PA	0241360000	50				MKL 3/12 KrG	0243620000**	20			
		16-pole										MKL 4/16 KrG	0262020000 ¹⁾	20
Vertical		2-pole							MKL 3/2 KrG	0276020000*	100			
Other number of poles on demand		4-pole												
		6-pole							MKL 3/6 KrG	0276420000*	50			
		12-pole							MKL 3/12 KrG	0249920000*	20			
		16-pole										MKL 4/16 KrG	0244320000	20
double-sided 2.8 x 0.8						MF 2/12 PA 0241860000 50								
single-sided 0.8 x 1.6/2.8 x 0.8						MF 2/12 PA 0241760000 50								
Expansion rivet/insulation sleeve														
IH			SN 0200100000 500			IH 2.8 0386060000 100								
Marking strips														
printed			BSTb 28/12 0245700000 50						BSTb 28/4 0289800000 50			BSTb 28/16 0262200000 50		
1 ...			bottom						BSTb 28/6 0290000000 50			bottom		
			top 0278500000 50						BSTb 28/12 0245900000 50			top		
unprinted			BSTo 28/12 0245600000 50						BSTo 28/4 0289300000 50			BSTo 28/16 0262100000 50		
									BSTo 28/6 0289500000 50					
									BSTo 28/12 0245800000 50					
Mounting rails, end brackets, further marking material see “Accessories”														


* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

1) Rated voltage 250 V


Multipole terminal blocks

Screw, solder, tab
connection
Modular design

AKB 4



AKZ 2.5



ASK 1



Max. technical data

Dimensions/approvals		AKB 4	AKZ 2.5	ASK 1
Width/length/height (mm)		6/27/23	5/25.5/26.5	8/58/30.5
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6	7 mm/M 2.5/3 x 0.5	9 mm/M 3/3.5 x 0.6
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section		400 V/32 A/4 mm ²	250 V/24 A/2.5 mm ²	500 V/6.3 A*/4 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	4 kV/3	6 kV/3
Further technical data				
Tightening torque range Nm		0.5...1.0	0.4...0.6	0.5...1.0
Torque setting with electric screwdriver type DMS 2		2	1	2
Clampable conductor				
Solid H07V-U mm ²		0.5...6	0.5...4	0.5...4
Stranded H07V-R mm ²		1.5...4	1.5...2.5	1.5...4
Flexible H07V-K mm ²		0.5...4	0.5...2.5	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²		0.5...4	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar mm ²		0.5...4	0.5...2.5	0.5...2.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.33...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3
Continuous current rating of cross-connection 2-pole A		32	24	(QB 2...4) 10
Continuous current rating of cross-connection multipole A		32	24	
Rated data according to UL/CSA				
Voltage/current/conductor size UL		300/250 V/27 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size CSA		300 V/10 A/22...12 AWG	300 V/10 A/26...10 AWG	300 V/6.3 A/26...12 AWG
Ordering data		Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
PA		AKB 4 PA 0321560000 100	AKZ 2.5 0697160000 100	ASK 1 PA 0376960000 100
Blue PA		0321580000 100	AKZ 2.5 0697180000 100	
		Direct mounting with BB 1 please order separately	Direct mounting with BB 4 please order separately	(for G fuse inserts 5x 20 without indicator)

End plate/attachment bracket (thickness mm)

	AP	BB 1 (7) 0320560000 50	BB 4 (7.5) 0697560000 50	
	PA Blue PA	BS M 3 x 15 0359000000 100	AP (2.5) 0697360000 50 AP (2.5) 0697380000 50	AP (1.5) 0380360000 20

Partition (thickness mm)

	TW PA (0.5) 0348260000 50			
---	---------------------------	--	--	--

Small partition

	TSch 4 0363360000 100			
---	-----------------------	--	--	--

Cross-connection

	Q 2	0336400000 50	Q 2	0368200000 50	QB 2 ¹⁾ 0461100000 50
	Q 3	0336500000 50	Q 3	0368300000 50	QB 3 ¹⁾ 0461200000 50
	Q 4	0336600000 50	Q 4	0368400000 50	QB 4 ¹⁾ 0461300000 50
	Q 10	0368600000 20	Q 10	0368500000 20	

Switchable cross-connection link

	VL 2	0446700000 50			
	VH 10	0446600000 50			
	BS M 2.5x14	0266800000 100			


Test plug/socket

	PS	StB 8.5 0215700000 50	StB 8.5 0215700000 50	
	StB	PS 2.3 0180400000 20	PS 2.3 0180400000 20	

Cover/contact sleeve

	AD 4	0303400000 50			
	BSK M 2.5x18	0303300000 100			K sleeve 0553300000 100

Marking tags

	DEK	Print	DEK 6	see "Accessories"	DEK 5	see "Accessories"	DEK 6.5	see "Accessories"
---	-----	-------	-------	-------------------	-------	-------------------	---------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ The conductor cross-section is reduced to max. 2.5 mm² when QB is used.

* With contact sleeve 19 A

Feed-through terminals

Screw connection
Solder connection
Tab connection
Spring-clip connection

acc. to DIN 41 611 Part 4

Wrap connection

acc. to DIN/IEC 352 Part 1

AKA 2.5



ADK 1



ADK 1 F
ADK 3 F



ADK 1 S



Dimensions/approvals			UL	CE	UL	CE	UL	CE	UL	CE							
Width/length/height with Pins (mm)			6/20/31		6/22/36.5		6/22/36.5		6/22/36.5								
Length solder tag/pin (mm)			7,8		8,4		8.5/7.5		8,4								
Insulation stripping length/clamping screw/screwdriver blade			9 mm/M 2.5/3.5 x 0.6		9 mm/M 3.5/3.5 x 0.6		11 mm/M 2.5/3.5 x 0.6		–								
Rated data																	
Rated voltage*/current/cross-section			400 V/20 A/2.5/1.5 mm²		400 V/16 A/4/1.5 mm²		400 V/20 A/2.5/1.5 mm²		400 V/16 A/2.5/1.5/1 mm²								
Rated impulse voltage VDE 0110/1.89/pollution severity			6 kV/3		6 kV/3		6 kV/3		6 kV/3								
Further technical data																	
Tightening torque range Nm			0.4		0.5...1.0		0.4...0.6		–								
Torque setting with electric screwdriver type DMS 2			1		2		1		–								
Clampable conductor																	
Solid H07V-U mm²			0.5...2.5		0.5...4		0.5...2.5										
Stranded H07V-R mm²			1.5...2.5		1.5...4		1.5...2.5										
Flexible H07V-K mm²			0.5...2.5		0.5...4		0.5...2.5										
Flexible H07V-K and ferrule DIN 46 228/1 mm²			0.5...1.5		0.5...2.5		0.5...1.5										
Flexible H07V-K and ferrule with plastic insul. collar mm²			0.5...1.5		0.5...2.5		0.5...1.5										
Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size			0.13...2.5 / A2		0.13...2.5 / A3		0.13...2.5 / A2		0.5...2.5 / –								
Continuous current rating of cross-connection 2-pole A																	
Continuous current rating of cross-connection multipole A			10		10												
Rated data according to UL/CSA																	
Voltage/current/conductor size UL			300 V/20 A/26...12 AWG		300 V/10 A/26...12 AWG		300 V/20 A/26...14 AWG		300 V/18 A/12 AWG max.								
Voltage/current/conductor size CSA			300 V/10 A/24...12 AWG		300 V/15 A/26...12 AWG		300 V/15 A/22...14 AWG		300 V/3 A–								
Ordering data			Version	for plate thickn. mm	Cat. No.	1.5	Qty.	1.5	Qty.	2.5	Qty.	1.5	Qty.	2.5	Qty.		
			PA														
			KrG		0300720000		100										
			Pin 1.0x1.0														
			Pin 0.8x1.6														
			FS 1x6.3 slotted/0.8x2.8										0476160000		100	0478560000	100

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals

ADK 1 T



	
6/22/50.5	
19.5...21.9	
9 mm/M 3/3.5 x 0.6	
400 V/8 A/4 mm ²	
6 kV/3	
0.5...1.0	
2	
0.5...4	
1.5...4	
0.5...4	
0.5...2.5	
0.5...2.5	
0.13...4.0 / A3	
10	
300/250 V/10 A/26...12 AWG	
300 V/15 A/26...12 AWG	
1.5	Qty. 2.5
0372260000 100	
0366360000 100	

Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5)	0442300000	50
----------	------------	----

PS 2.3 0180400000 20

SST 1.2	0306600000
---------	------------

DEK 6 see "Accessories"

AKZ 2.5 K



0109160000 solder tag

	
5/26/45.5	
22.4...23.6	
7 mm/M 2.5/3.0 x 0.5	
250 V/8 A/2.5 mm ²	
4 kV/3	
0.4...0.6	
1	
0.5...2.5	
1.5...2.5	
0.5...2.5	
0.5...2.5	
0.5...2.5	
0.13...2.5 / A2	
10	
300/250 V/10 A/22...12 AWG	
300 V/10 A/26...10 AWG	
Cat. No.	Qty.
0109160000 solder tag	100
0108960000	100

Type	Cat. No.	Qty.
AP (3)	0697260000	50

TW (1.5)	0318560000	20
----------	------------	----

PS 2.3	0180400000	20
StB 8.5	0215700000	50

IH 2.8	0386060000	100
--------	------------	-----

DEK 5 see "Accessories"

ADK 1 FT





6/22/52
24
11 mm/M 2.5/3.5 x 0.6
250 V/10 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...1.5
0.5...1.5
0.33...2.5 / A2
300 V/3 A/22...14 AWG
Cat. No. 1.5 Qty
0176960000 100

Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5) 0442300000 50SST 1.2 0306600000DEK 6 see "Accessories"

MK 2/12



	
86/15/23	
8	
5	
63 V/20 A/2.5/1.5 mm ²	
1.5 kV/3	
0.4...0.45	
1	
0.5...2.5	
1.5...2.5	
0.5...2.5	
0.5...2.5	
0.5...2.5	
0.2...2.5 / A2	
300 V/10 A/24...12 AWG	
300 V/10 A/24...12 AWG	
Cat. No.	Qty.

0241460000 50

Type	Cat. No.	Qty.
------	----------	------

SN 0200100000 500

BSTb 28/12	024570...	50
BSTo 28/12	024560...	50

Rack-mounted interface systems



Dimensions														
Width/length/height (mm)		40.2/110.6/29.5			42/46.5/170/28			40/45.5/162.5/110			40/45.5/228.5/110			
Hole spacing/mounting dimensions		mm 101.6/20.3			147			151/90			217/90			
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6												
Rated data														
Rated voltage*/current/cross-section		250* V/6 A/1.5/1 mm²			1000* V/16 A/2.5/1.5 mm²			400* V/16 A/2.5/1.5 mm²			400* V/16 A/2.5/1.5 mm²			
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3			6 kV/3			6 kV/3			6 kV/3			
Further technical data														
Tightening torque range		Nm 0.4...0.7												
Torque setting with electric screwdriver type DMS 2		1												
Clampable conductor														
Solid H07V-U		mm² 0.5...2.5												
Stranded H07V-R		mm² 1.5												
Flexible H07V-K		mm² 0.5...1.5												
Flexible H07V-K and ferrule DIN 46 228/1		mm² 0.5...1.5												
Flexible H07V-K and ferrule with plastic insul. collar		mm² 0.5...1.5												
Plug gauge acc. to IEC 60 947-1		Size A1												
Ordering data		Version	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Pin 1.0 x 1.0		PA	TOP 1.5 F/32	0443160000 ¹⁾	5									
Pin 0.8 x 2.8 (push-on), unprinted		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32, blue		PA												
6 x plug (6.3 x 0.8)		KrG				SP 10 FF	0456220000	10	SP 60 FF ⁴⁾	0340320000	1	SP 90 FF**	0248120000	1
6 x plug (6.3 x 0.8), blue		KrG							SP 60 FF ⁴⁾	0340370000	1			
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted		KrG										SP 90 FF**	0608920000	1
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted, blue		KrG												
3 x plug (6.3x0.8)/1 x solder per pole		KrG							SP 60 LF ⁴⁾	0343720000	1	SP 90 LF**	0248220000	1
3 x plug (6.3x0.8)/1 x solder per pole, blue		KrG							SP 60 LF ⁴⁾	0343770000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8)/1 x solder		KrG							SP 60 LF ⁵⁾	0124520000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8)/1 x solder, blue		KrG							SP 60 LF ⁵⁾	0124570000	1	printed:		
2 x direct connection, 1 x Pin 0.8 x 1.6		PA										** A...F / 1...15		
									printed:					
									⁴⁾ A...F / 1...10					
									⁵⁾ 00...50 / 1...10					
Insulation sleeves		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
		IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	
					IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100	
Marking tags		Print												
dekafix		for group markers				FW 5	see "Accessories"							
Mounting rails, end brackets, further marking material see "Accessories"														

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

1) Rated voltage 125 V

2) FF = Tab- Tab
3) LF = Solder - Tab

Rack-mounted interface systems

RV 8/8 long



RV 8/8 short



RV 8/9 long



RV 8/9 short



Technical data acc. to VDE

Pin versions (intern)

0.8 x 2.4/1 x 1
0.8 x 2.4/0.8 x 2.4

Plug adapter



1-pole

for connection of solid and flexible conductors from 0.75 to 1.5 mm² directly on to the pins of the interface system.


125 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0468860000	1		0467160000	1
	0468960000	1		0467260000	1
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

105 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0498960000	1		0444060000	1
	0499060000	1		0545960000	1
with shield pins			with shield pins		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

RV 8/20 short



RV 8/56 short

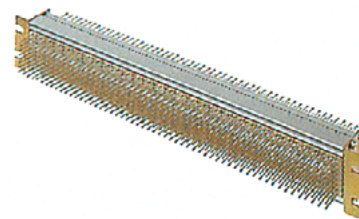

Technical data acc. to VDE


Pin versions (internal)

0.8 x 2.4/1 x 1
0.8 x 2.4/0.8 x 2.4

Additional versions on request

125 V/-/-		
Cat. No.	Qty.	
0544460000	1	

125 V/-/-		
Cat. No.	Qty.	
0462260000	1	
0533060000	4	

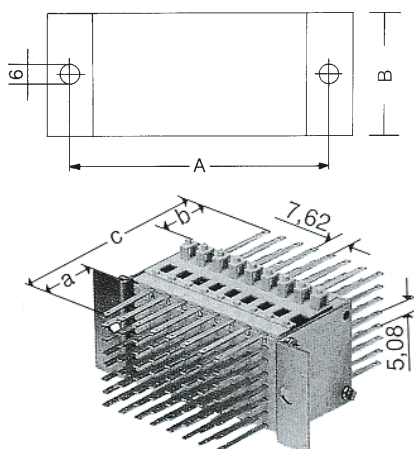

Type	Size A	Size B
	in mm	in mm
RV 8/8 K	81	40.64
RV 8/9 K	89	40.64
RV 8/8 L	93	40.64
RV 8/9 L	100	40.64
RV 8/20 K	187,62/31.5	63
RV 8/56 K	460/31.5	63

(K = short/L = long)

Cat. No.	RV	a	b	c
0468860000	8/8 L	26	20	200
0468960000	8/8 L	26	26	206
0467160000	8/8 K	26	20	84
0467260000	8/8 K	26	26	89
0119360000	8/20 K	26	20	84
0544460000	8/20 K	26	26	89
0462260000	8/56 K	26	20	84
0533060000	8/56 K	26	26	89

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ