

## Standard Recovery Diodes (Stud Version), 150 A



DO-205AA (DO-8)

### FEATURES

- Alloy diode
- High current carrying capability
- High surge current capabilities
- Stud cathode and stud anode version
- RoHS compliant
- Designed and qualified for industrial level



### PRODUCT SUMMARY

|             |       |
|-------------|-------|
| $I_{F(AV)}$ | 150 A |
|-------------|-------|

### TYPICAL APPLICATIONS

- Battery chargers
- Welders
- Machine tool controls
- High power drives
- Medium traction applications
- Freewheeling diodes

### MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER    | TEST CONDITIONS | VALUES      | UNITS             |
|--------------|-----------------|-------------|-------------------|
| $I_{F(AV)}$  |                 | 150         | A                 |
|              | $T_C$           | 150         | °C                |
| $I_{F(RMS)}$ |                 | 235         | A                 |
| $I_{FSM}$    | 50 Hz           | 3570        | A                 |
|              | 60 Hz           | 3740        |                   |
| $I^2t$       | 50 Hz           | 64          | kA <sup>2</sup> s |
|              | 60 Hz           | 58          |                   |
| $V_{RRM}$    | Range           | 100 to 600  | V                 |
| $T_J$        |                 | - 40 to 200 | °C                |

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

| TYPE NUMBER                   | VOLTAGE CODE | $V_{RRM}$ , MAXIMUM REPETITIVE<br>PEAK REVERSE VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE<br>PEAK REVERSE VOLTAGE<br>V | $I_{RRM}$ MAXIMUM<br>AT $T_J = 175\text{ °C}$<br>mA |
|-------------------------------|--------------|-------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------|
| 45L(R)<br>150K(R)<br>150KS(R) | 10           | 100                                                         | 200                                                             | 35                                                  |
|                               | 20           | 200                                                         | 300                                                             |                                                     |
|                               | 30           | 300                                                         | 400                                                             |                                                     |
|                               | 40           | 400                                                         | 500                                                             |                                                     |
|                               | 60           | 600                                                         | 720                                                             |                                                     |

# 45L(R), 150K(R), 150KS(R) Series

Vishay Semiconductors

Standard Recovery Diodes  
(Stud Version), 150 A



| FORWARD CONDUCTION                                            |                     |                                                                                                          |                                  |                                                                       |        |                    |
|---------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------|--------|--------------------|
| PARAMETER                                                     | SYMBOL              | TEST CONDITIONS                                                                                          |                                  |                                                                       | VALUES | UNITS              |
| Maximum average forward current at case temperature           | I <sub>F(AV)</sub>  | 180° conduction, half sine wave                                                                          |                                  |                                                                       | 150    | A                  |
|                                                               |                     |                                                                                                          |                                  |                                                                       | 150    | °C                 |
| Maximum RMS forward current                                   | I <sub>F(RMS)</sub> | DC at 142 °C case temperature                                                                            |                                  |                                                                       | 235    | A                  |
| Maximum peak, one cycle forward, non-repetitive surge current | I <sub>FSM</sub>    | t = 10 ms                                                                                                | No voltage reapplied             | Sinusoidal half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum | 3570   |                    |
|                                                               |                     | t = 8.3 ms                                                                                               |                                  |                                                                       | 3740   |                    |
|                                                               |                     | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                                       | 3000   |                    |
|                                                               |                     | t = 8.3 ms                                                                                               |                                  |                                                                       | 3140   |                    |
| Maximum I <sup>2</sup> t for fusing                           | I <sup>2</sup> t    | t = 10 ms                                                                                                | No voltage reapplied             |                                                                       | 64     | kA <sup>2</sup> s  |
|                                                               |                     | t = 8.3 ms                                                                                               |                                  |                                                                       | 58     |                    |
|                                                               |                     | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                                       | 45     |                    |
|                                                               |                     | t = 8.3 ms                                                                                               |                                  |                                                                       | 41     |                    |
| Maximum I <sup>2</sup> √t for fusing                          | I <sup>2</sup> √t   | t = 0.1 to 10 ms, no voltage reapplied                                                                   |                                  |                                                                       | 640    | kA <sup>2</sup> √s |
| Low level value of threshold voltage                          | V <sub>F(TO)1</sub> | (16.7 % × π × I <sub>F(AV)</sub> < I < π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 0.67   | V                  |
| High level value of threshold voltage                         | V <sub>F(TO)2</sub> | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                   |                                  |                                                                       | 0.83   |                    |
| Low level value of forward slope resistance                   | r <sub>f1</sub>     | (16.7 % × π × I <sub>F(AV)</sub> < I < π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 1.42   | mΩ                 |
| High level value of forward slope resistance                  | r <sub>f2</sub>     | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                   |                                  |                                                                       | 0.91   |                    |
| Maximum forward voltage drop                                  | V <sub>FM</sub>     | I <sub>pk</sub> = 471 A, T <sub>J</sub> = 25 °C, t <sub>p</sub> = 10 ms sinusoidal wave                  |                                  |                                                                       | 1.33   | V                  |

| THERMAL AND MECHANICAL SPECIFICATIONS                    |                |                                               |                  |                     |
|----------------------------------------------------------|----------------|-----------------------------------------------|------------------|---------------------|
| PARAMETER                                                | SYMBOL         | TEST CONDITIONS                               | VALUES           | UNITS               |
| Maximum junction operating and storage temperature range | $T_J, T_{Stg}$ |                                               | - 40 to 200      | °C                  |
| Maximum thermal resistance, junction to case             | $R_{thJC}$     | DC operation                                  | 0.25             | K/W                 |
| Maximum thermal resistance, case to heatsink             | $R_{thCS}$     | Mounting surface, smooth, flat and greased    | 0.10             |                     |
| Mounting torque<br>45L                                   | minimum        | Not lubricated threads                        | 14.1 (125)       | N · m<br>(lbf · in) |
|                                                          | maximum        |                                               | 17.0 (150)       |                     |
|                                                          | minimum        | Lubricated threads                            | 12.2 (108)       |                     |
|                                                          | maximum        |                                               | 15.0 (132)       |                     |
| Mounting torque<br>150K<br>150KS                         | minimum        | Not lubricated threads                        | 11.3 (100)       | N · m<br>(lbf · in) |
|                                                          | maximum        |                                               | 14.1 (125)       |                     |
|                                                          | minimum        | Lubricated threads                            | 9.5 (85)         |                     |
|                                                          | maximum        |                                               | 12.5 (110)       |                     |
| Approximate weight                                       |                |                                               | 100              | g                   |
|                                                          |                |                                               | 3.5              | oz.                 |
| Case style                                               | 45L            | See dimensions - link at the end of datasheet | DO-205AC (DO-30) |                     |
|                                                          | 150K-A         |                                               | DO-205AA (DO-8)  |                     |
|                                                          | 150KS          |                                               | B-42             |                     |



# 45L(R), 150K(R), 150KS(R) Series

Standard Recovery Diodes  
(Stud Version), 150 A

Vishay Semiconductors

| $\Delta R_{thJC}$ CONDUCTION |                       |                        |                             |       |
|------------------------------|-----------------------|------------------------|-----------------------------|-------|
| CONDUCTION ANGLE             | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | TEST CONDITIONS             | UNITS |
| 180°                         | 0.031                 | 0.023                  | $T_J = T_J \text{ maximum}$ | K/W   |
| 120°                         | 0.038                 | 0.040                  |                             |       |
| 90°                          | 0.048                 | 0.053                  |                             |       |
| 60°                          | 0.071                 | 0.075                  |                             |       |
| 30°                          | 0.120                 | 0.121                  |                             |       |

## Note

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

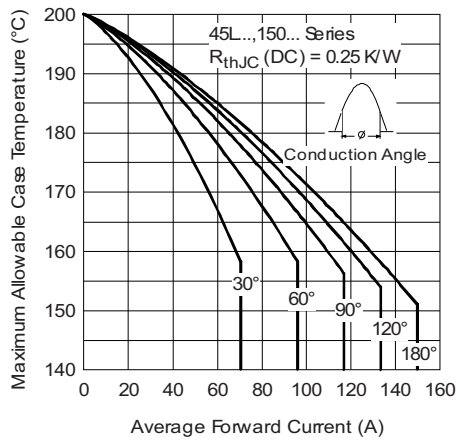


Fig. 1 - Current Ratings Characteristics

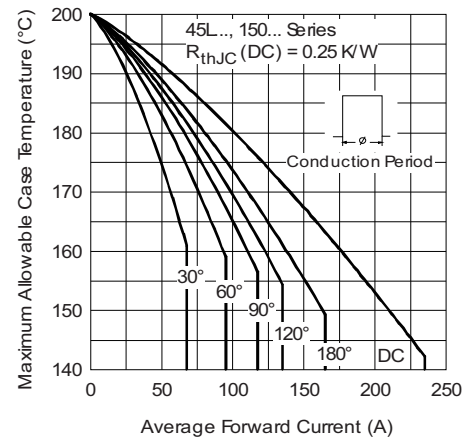


Fig. 2 - Current Ratings Characteristics

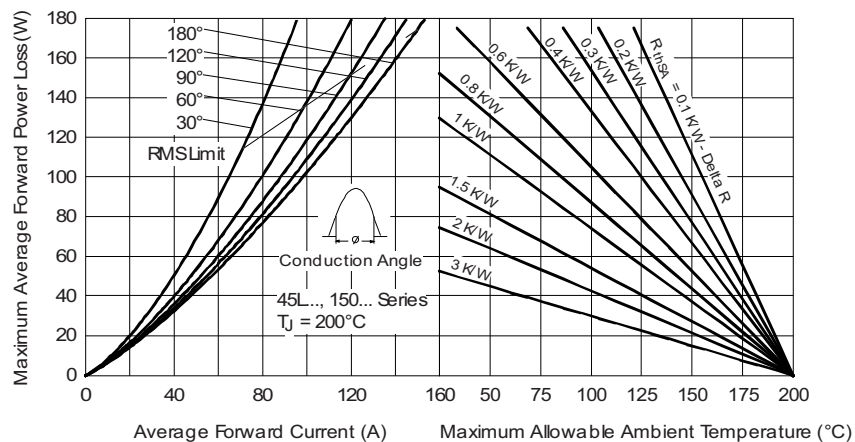


Fig. 3 - Forward Power Loss Characteristics

# 45L(R), 150K(R), 150KS(R) Series

Vishay Semiconductors

Standard Recovery Diodes  
(Stud Version), 150 A

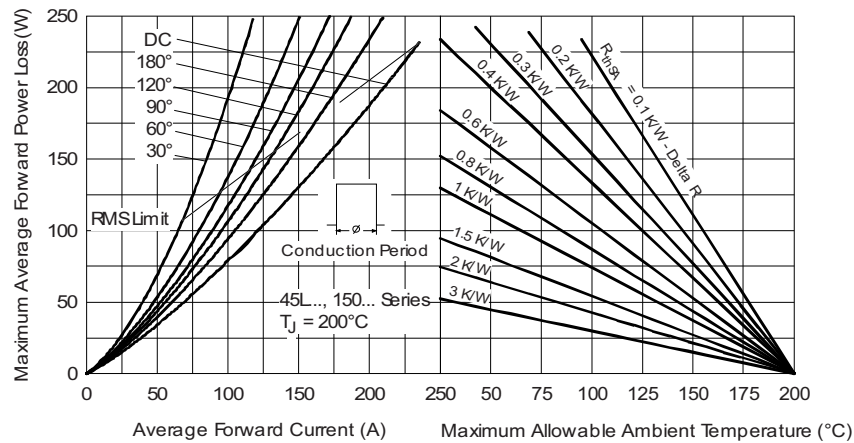


Fig. 4 - Forward Power Loss Characteristics

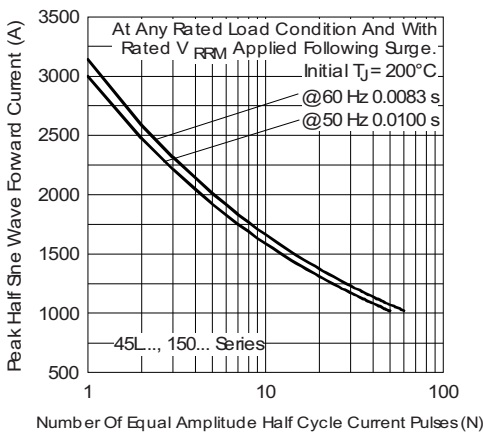


Fig. 5 - Maximum Non-Repetitive Surge Current

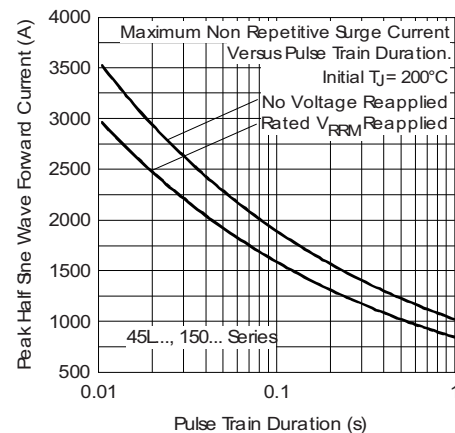


Fig. 6 - Maximum Non-Repetitive Surge Current

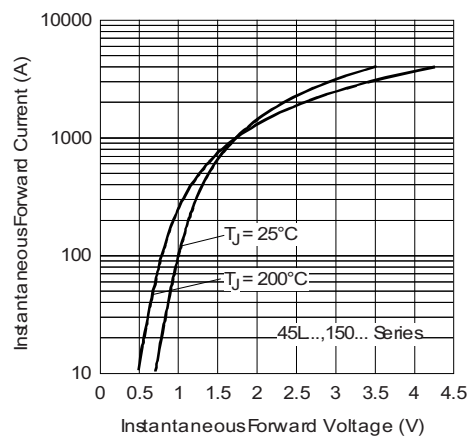


Fig. 7 - Forward Voltage Drop Characteristics



## 45L(R), 150K(R), 150KS(R) Series

Standard Recovery Diodes  
(Stud Version), 150 A

Vishay Semiconductors

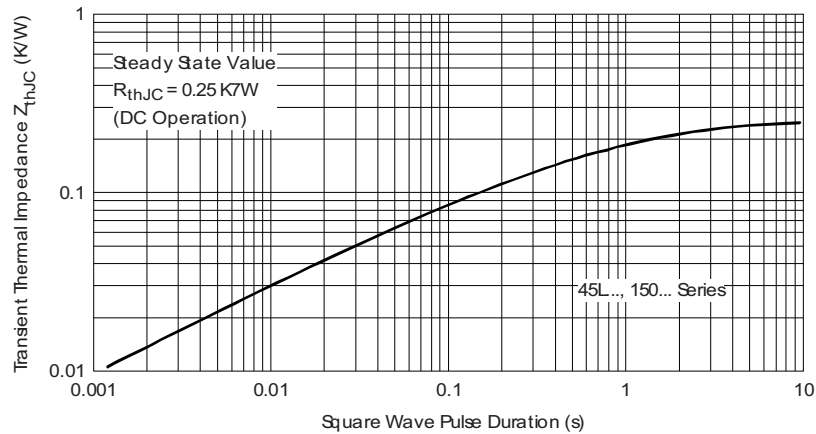


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics

### ORDERING INFORMATION TABLES

Device code

|    |   |   |    |
|----|---|---|----|
| 45 | L | R | 60 |
| 1  | 2 | 3 | 4  |

- 1** - 45 = Standard version
- 2** - L = Essential part number
- 3** - R = Stud reverse polarity (anode to stud)  
None = Stud normal polarity (cathode to stud)
- 4** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)

Device code

|    |   |   |   |    |   |
|----|---|---|---|----|---|
| 15 | 0 | K | R | 60 | A |
| 1  | 2 | 3 | 4 | 5  | 6 |

- 1** - 15 = Essential part number
- 2** - 0 = Standard device
- 3** - Case style:  
K = DO-205AA (DO-8)  
KS = B-42
- 4** - R = Stud reverse polarity (anode to stud)  
None = Stud normal polarity (cathode to stud)
- 5** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)
- 6** - A = Essential part number for 150K (omitted for 150KS)

Note: For metric device M12 x 1.75 contact factory


#### LINKS TO RELATED DOCUMENTS

Dimensions

<http://www.vishay.com/doc?95314>

## DO-205AC (DO-30), DO-205AA (DO-8) and B-42 for 45L(R), 150K(R) and 150KS(R) Series

**DIMENSIONS FOR 45L(R) SERIES - DO-205AC (DO-30)** in millimeters (inches)

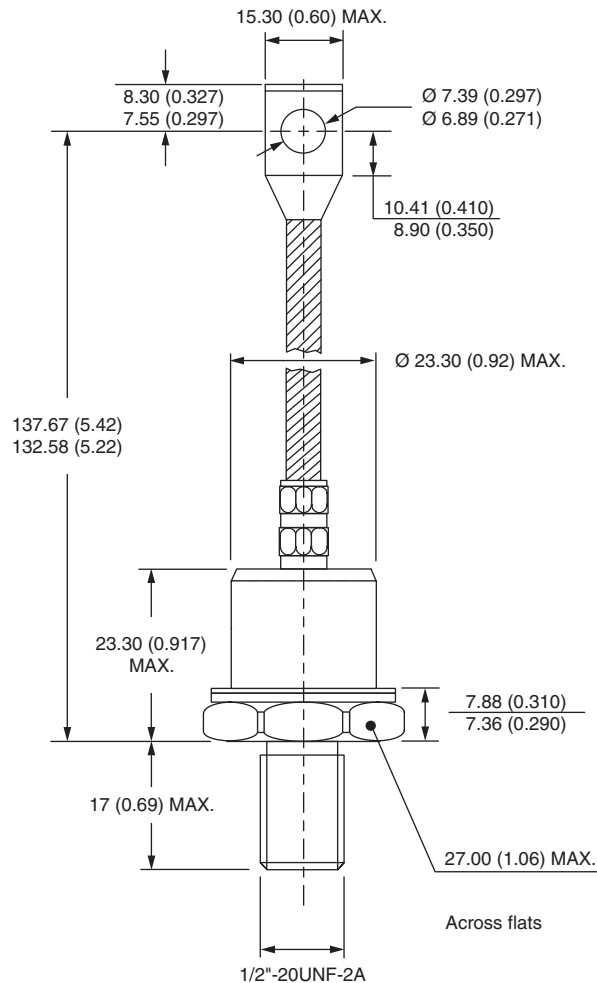


# Outline Dimensions



Vishay Semiconductors

DO-205AC (DO-30), DO-205AA (DO-8)  
and B-42 for 45L(R), 150K(R) and 150KS(R) Series

## DIMENSIONS FOR 150K(R) SERIES - DO-205AA (DO-8) in millimeters (inches)

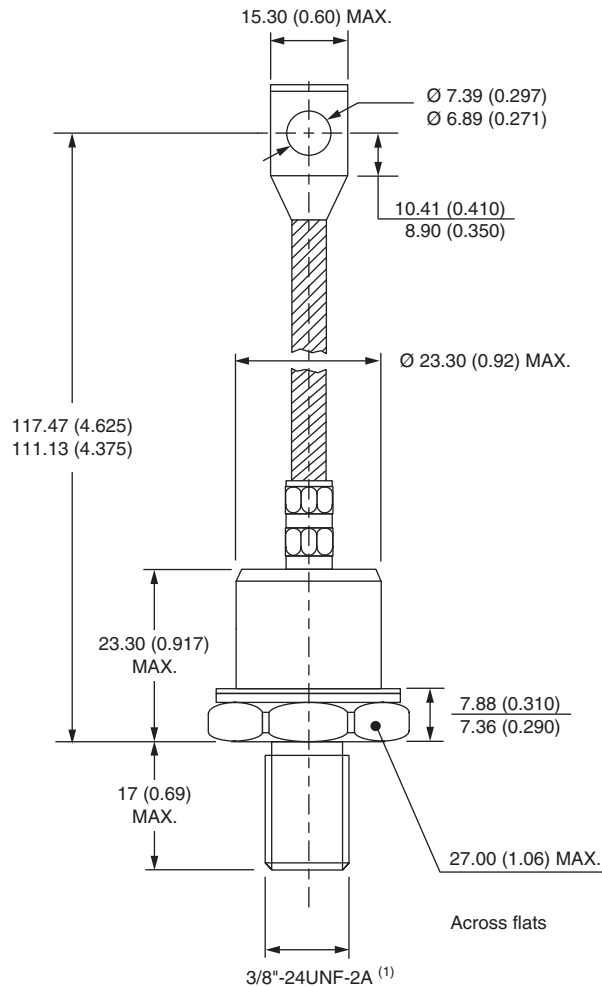

### Note


<sup>(1)</sup> For metric device M12 x 1.75 contact factory



DO-205AC (DO-30), DO-205AA (DO-8)  
and B-42 for 45L(R), 150K(R) and 150KS(R) Series

Vishay Semiconductors

## DIMENSIONS FOR 150KS(R) SERIES - B-42 in millimeters (inches)

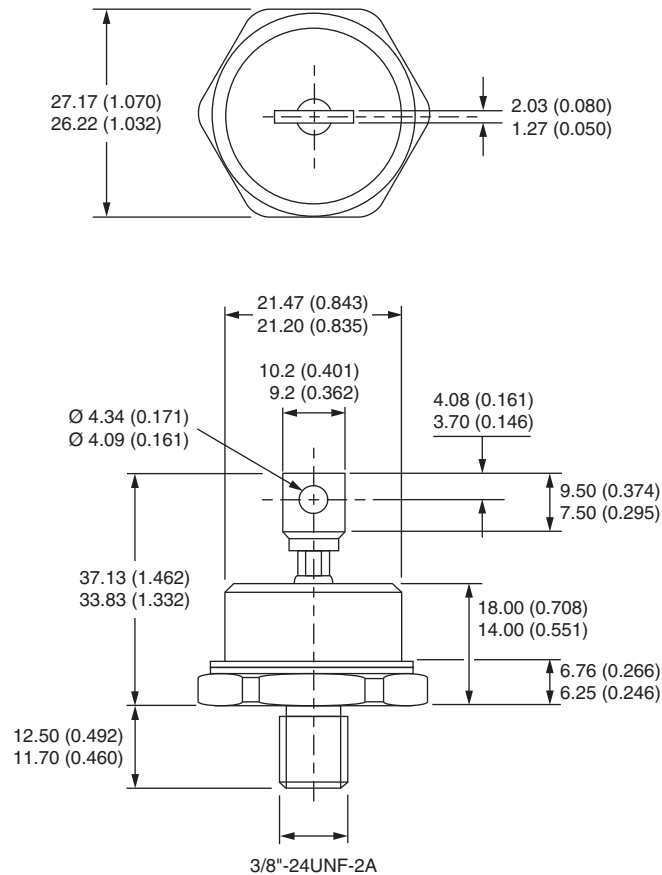





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**



**ООО «НИОКРсистемс»** - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

### **Наша компания это:**

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ