


SFP650-12BG

AC-DC Power Supply

12V Output, 650 Watts

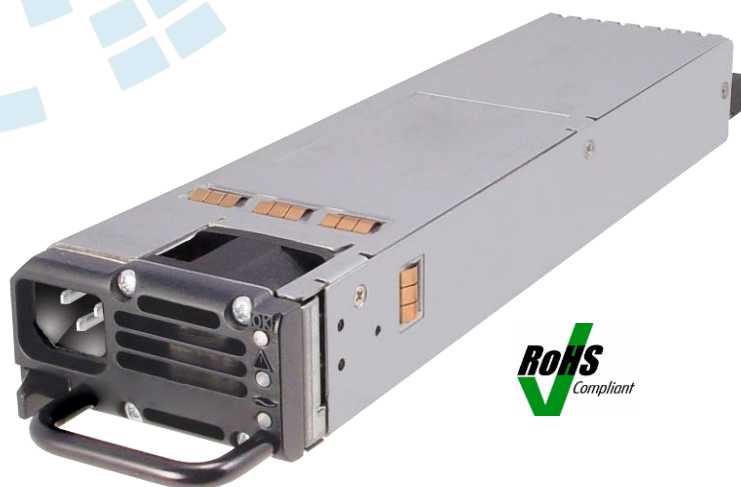

Key Features & Benefits

- Ideal server form factor optimizes, space, efficiency, and load variations
- High efficiency maximized between 30-80% load conditions
- Unconditionally stable under any load condition
- Wide range DC-input model available (SFD550-12BG)
- Wide input voltage range (90-264 VAC) with PFC
- 1U or 2U height configurations
- Active current share with ORing FET
- I2C interface status monitoring
- Standby voltage of 3.3 VDC @ 3 A
- Overtemperature, overload, and overvoltage protection
- Status LEDs: AC OK, POWER GOOD, PS FAIL

The Bel Power Solutions SFP650-12BG is a 650 W, power factor corrected (PFC) front-end which provides a 12 VDC output for datacom and other distributed power applications. Its compact size enables mounting in both 1U and 2U height racks. High efficiencies, advanced thermal management techniques, and an internal fan increase reliability over a broad range of operating conditions. Internal ORing diodes facilitate use in hot-swap (plug)*, redundant configurations.

Status is provided with front panel LEDs, logic signals, and via the I2C management interface bus.

The SFP650-12BG meets international safety requirements and is CE marked to the Low Voltage Directive (LVD).

* Proper hot-swap (plug) operation instruction: Power supply is not intended to be inserted into the system with AC cord already applied. Alternatively, if there is an application where power supply insertion with AC cord is required; PS_ON must be toggled or AC recycled after insertion into the system to reset the power supply.

Applications

- Datacom
- Distributed Power Systems

North America
+1-866.513.2839

Asia-Pacific
+86.755.29885888

Europe, Middle East
+353 61 225 977

tech.support@psbel.com
belpowersolutions.com

SFP650-12BG

Model Selection

MODEL	NOMINAL OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	REGULATION	RIPPLE & NOISE @ 20 MHz BW
SFP650-12BG	12 VDC 3.3 VDC (Standby)	N/A N/A	53.3 A 3 A	±3 % ±3 %	100 mV 100 mV

Input Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
AC Input Voltage	Single-phase continuous input range.	90		264	VAC
Input Frequency	AC input.	47		63	Hz
Hold-up Time	After last AC line peak at full power.	At 115 VAC	14		ms
Input Current	At full-rated load.	At 90 VAC		9	Arms
Inrush Surge Current	Excluding Xcap. Vin = 264 VAC, T = 25 °C			15	Apk
Power Factor	Per EN61000-3-2	> 0.95			W/VA

Output Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency ¹	With Vin at 115 VAC and 50% to 75% load on V1.	86			%
	With Vin at 115 AC and 75% to 100% load on V1.	86			%
	With Vin at 230 VAC and 50% to 75% load on V1.	87			%
	With Vin at 230 VAC and 75% to 100% load on V1.	89			%
Minimum Load	Minimum loading required to maintain regulation.	0			A
Output Power				650	W
Overshoot	Output voltage overshoot at turn-on.			< 5	%
Transient Response	Maximum recovery time to within 1% of initial set point due to a 25% load change, 1A/μs.	12V output:		5	ms
		Standby output:		5	ms
	Maximum deviation:	12V output:		3	%
Turn-On Delay with PS_ON signal	Time required for initial output voltage stabilization after application of AC input or ON/OFF signal.	Standby output:		3	%
Output Regulation	See Model Selection table above.			1500	ms

I²C Bus Management Interface²

PARAMETER	CONDITIONS / DESCRIPTION
Static	Includes static information such as: part number and revision level, output rating, serial number, date code, and manufacturing location.
Status (Logic 1 or 0)	AC Input OK. DC Output OK. Overtemperature. Overcurrent. Fan OK. Overvoltage Alert Undervoltage Alert
Real-Time Monitoring	Output voltage (main output). LSB = 20 mV Output current (main output). LSB = 100 mA

¹ Internal fan is considered part of the load as it is driven from the 12 V output; Vaux load is set to 0 A for efficiency measurements.

² Reference "I²C Management Interface" and "EEPROM Table of Contents" documents for SFP650-12BG (consult factory).

+1.866.513.2839

tech.support@psbel.com

belpowersolutions.com

SFP650-12BG

Interface Signals & Internal Protection³

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Latch-style overvoltage protection.			15 4.3	V
Overcurrent Protection	Current limit (Latching Mode). 12V output: Standby output:	56.0 3.2		69.3 6	A
Short-Circuit Protection	Latching Mode.				
Overtemperature/ Fan Failure Warning	12 V output will shut down in the event of an overtemperature condition or blocked fan rotor. OT setpoint is 62 ±3 °C. Supply's fan and Vaux are active. Power supply will recover when OT condition is removed. Amber OT LED will turn ON to indicate fault condition.				
PS_KILL	Output enable. Pulled low on conjunction with PS_ON being pulled low allows V1 to be activated. PSKILL will cause the PSU to latch off the 12 V rail, the latch can be cleared by recycling PSON or recycling the AC supply.				
+12V Current Share	0 to 8V signal used for active current sharing.				
Write Protect	For factory use only.				
PS A0	I ² C Address.				
SDA	I ² C Data line (3.3 V).				
SCL	I ² C Clock line (3.3 V).				
Tach	Two pulses per fan revolution.				
AC_OK/H	High signal indicates AC is within PSU limits.				
Present/L	100 Ohm resistor internally connected to RTN allowing the PSU to be detected on insertion.				
Alert/L	Low signal indicates PSU fan is running below speed or an overtemperature limit was exceeded.				
PWROK/H	High signal indicates both outputs are within regulation limits.				

Safety, Regulatory and EMI Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards: UL/CSA60950-1, IEC60950-1 and EN60950-1. CE Mark for LVD				
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B, EN55022/CISPR 22.	Conducted: Radiated:	A A		Class
Harmonics	Per IEC61000-3-2.		A		Class
Voltage Fluctuation and Flicker	Per IEC61000-3-3.		Pass		
ESD Susceptibility	Per EN 61000-4-2, Level 4 Performance criteria A	Contact Discharge: Air Discharge:	±8 ±15		kV
Radiated Susceptibility	Per EN 61000-4-3, Level 3., Performance criteria A		10		V/M
EFT/Burst	Per EN 61000-4-4, Level 4 Performance criteria A		±4		kV
Input Transient Protection	Per EN 61000-4-5, Class 3 Performance criteria A	Line-to-Line: Line-to-Ground:	1 2		kV
RF Conducted Disturbances	Per EN 61000-4-6, Level 2., Performance criteria A		3		V
Voltage Interruptions	Per EN 61000-4-11, performance criterion B 30%. Per EN 61000-4-11, performance criterion C 60%. Per EN 61000-4-11, performance criterion C 95%.		10 100 5		ms ms sec
Voltage Sag Immunity	Per SEMI F47-0999 > 100 VAC. No output voltage interruption.				
Leakage Current	Per EN60950.	At 240 VAC:		1.75	mA

³ Refer to product specification for internal pull up impedances and timing of these signals.


Environmental Specifications

LED Indicators

Mechanical Specifications

BCD20033-G AC

SFP650-12BG

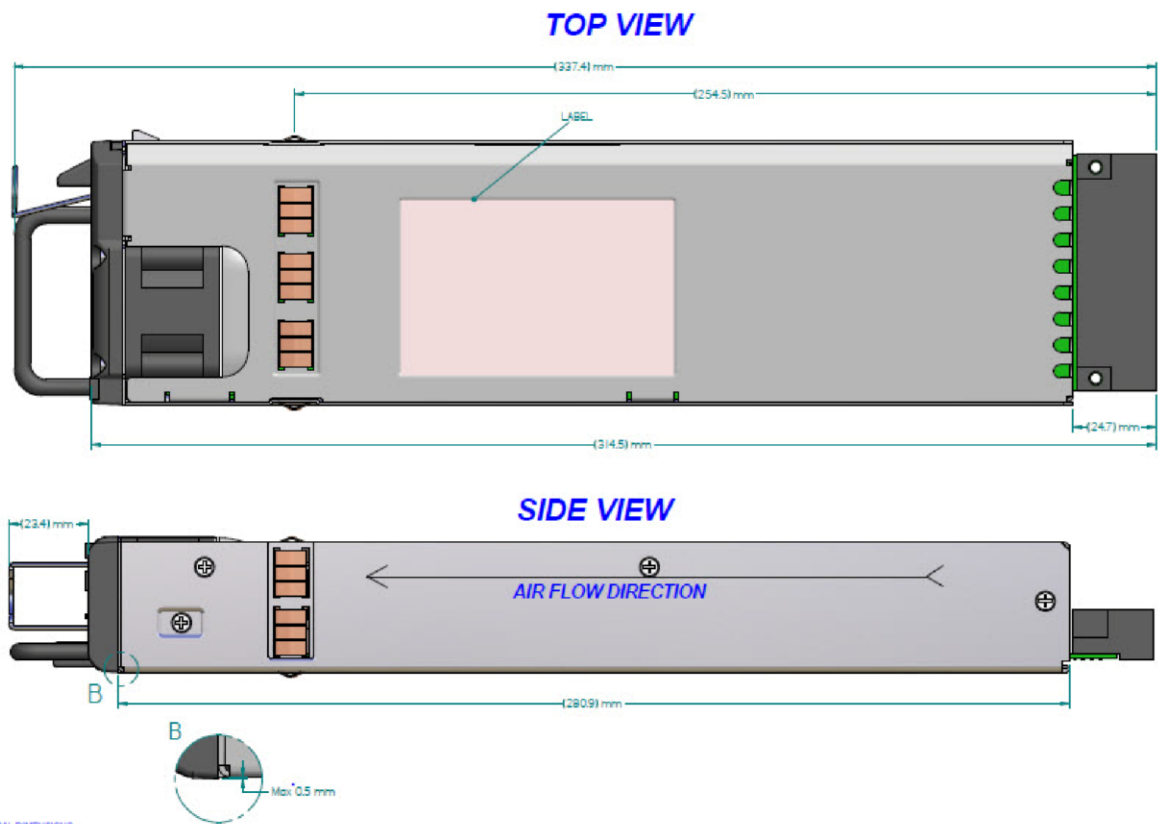



* DENOTES CRITICAL DIMENSIONS
NOTES: UNLESS OTHERWISE SPECIFIED.

Connector Information

Power Supply:	Input - IEC 320 input (Male) standard line cord connection	
	Output - P/N FCI 51721-10002406AA or equivalent	
Mating Connections:	Input - IEC 320 output (Socket) Standard line cord (15A)	
	Output - P/N: FCI 51741-10002406CC	
Input IEC Connector:	Input	Location
	Chassis (Safety) Ground	Ground
	Line 1 (Line)	L
	Line 2 (Neutral)	N

SFP650-12BG

Output Connector Details

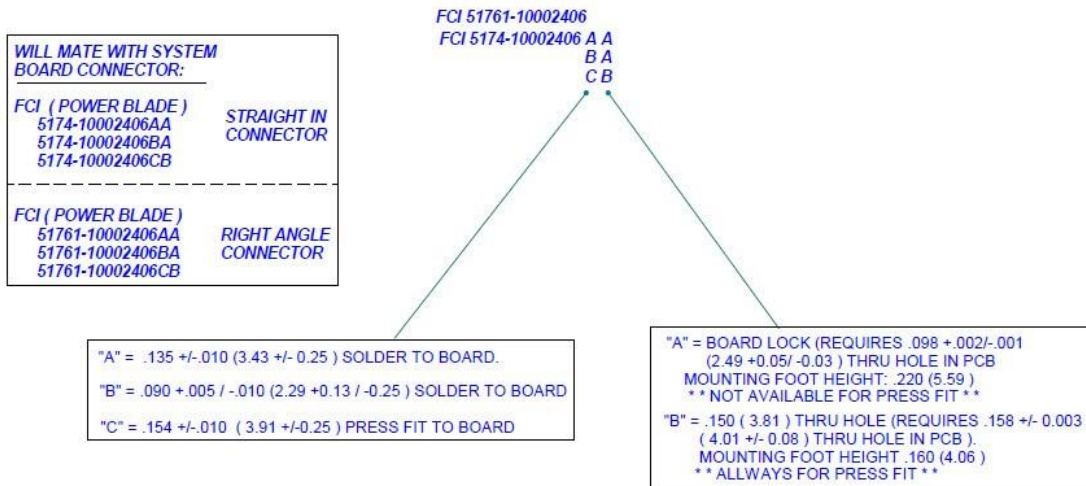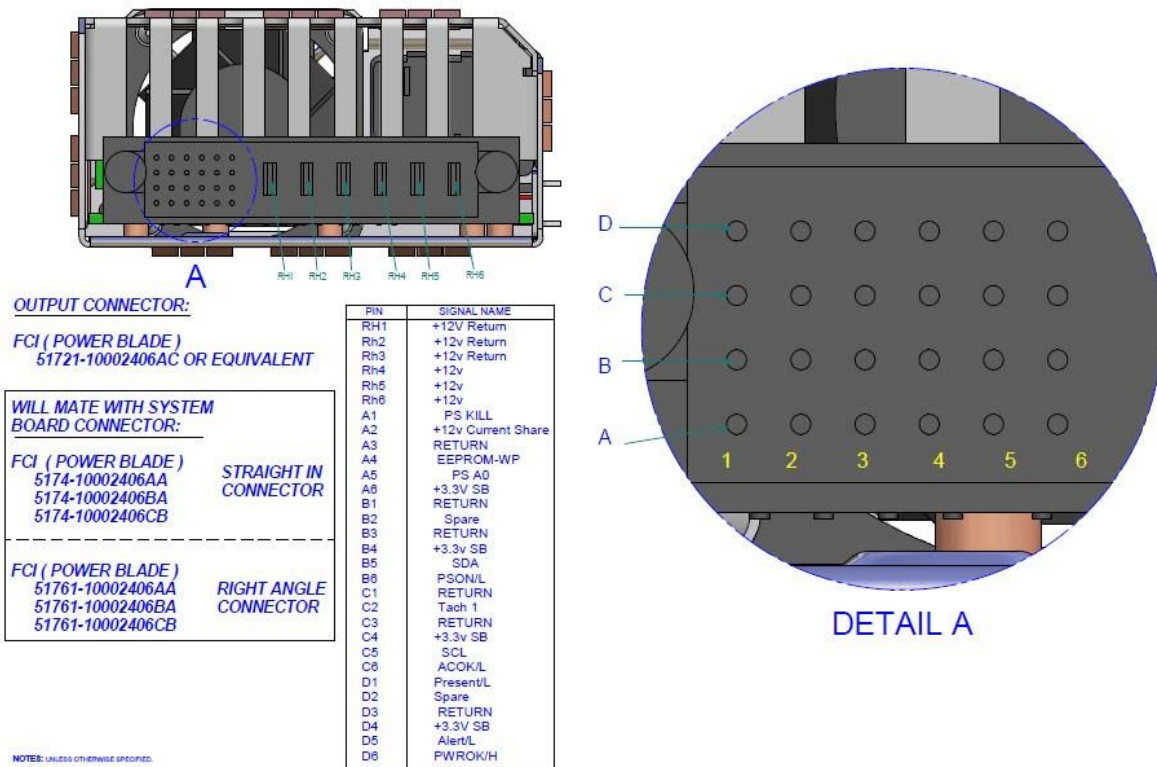

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ