


Position detectors



Pressure decay sensor

■ 100 % pneumatic

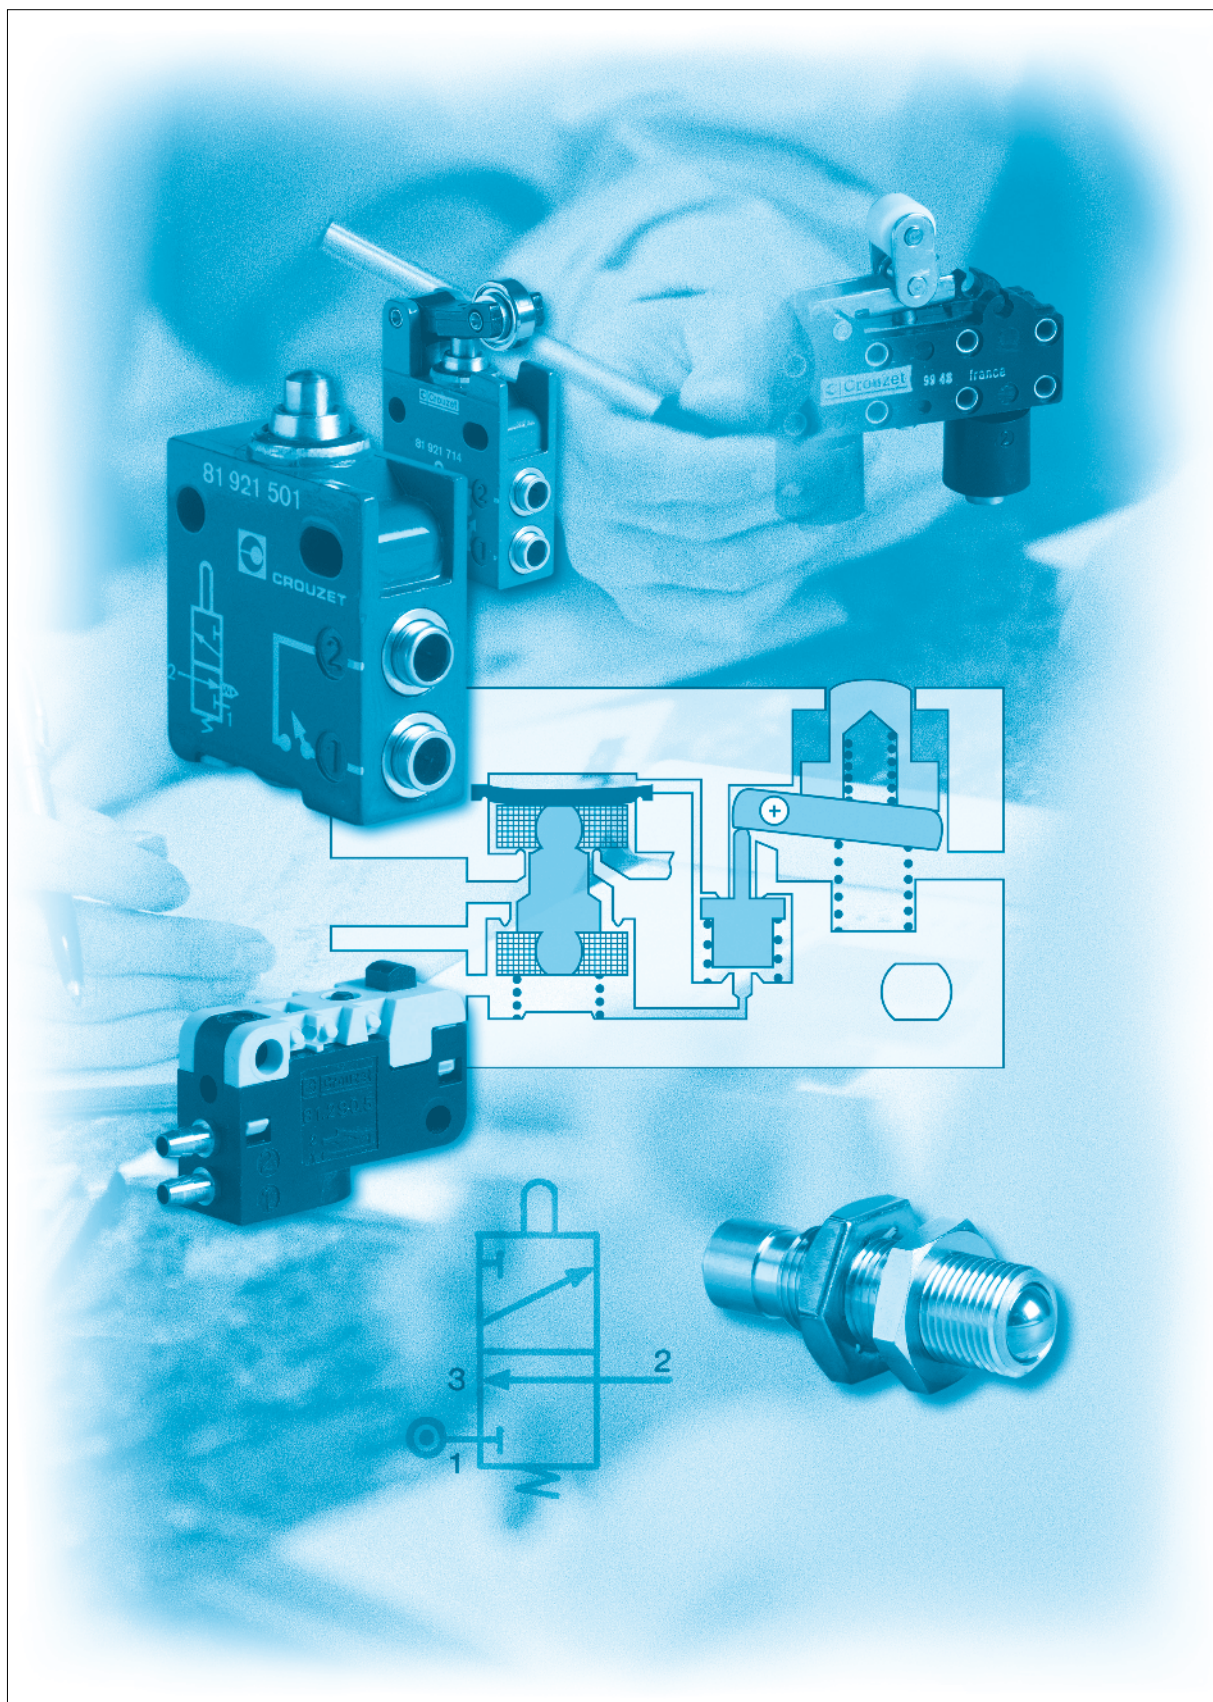


Also available in **ATEX** version for use in potentially explosive atmospheres in accordance with 94/9/EC Directive



Pressure decay sensor

81 504 025

Symbol




Characteristics


Operating pressure	bar	2 → 8
Flow at 6 bars	NI/min	200
Tripping point with 6 bar supply	b	0.3
Connection		Sub-base page 54-55
Operating temperature	°C	-5 → +50
Mechanical life	operations	≥10 ⁷
Weight	g	25

Connections

Without flow restrictor

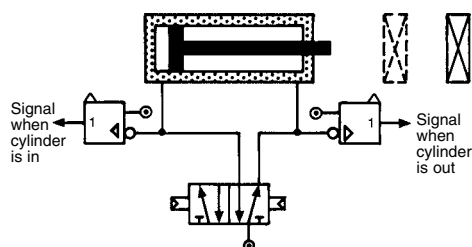

With flow restrictor




Principle of operation

Fitted in-line between the cylinder and the control valve, the sensor will give an output when the pressure in this line is exhausted and the cylinder is at end of stroke.


For the correct usage of sensors on a falling pressure, it is recommended that the practical cylinder load is limited to 60% of the theoretical force.

Evolution of pressure within a double-acting cylinder

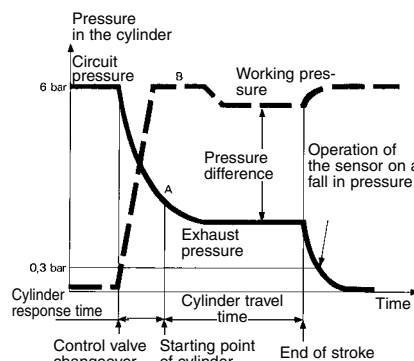

Dimensions

81 504 025

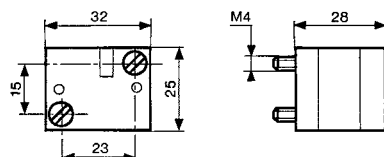

ATEX version products are available in the following catalogues: **Pneumatic products for explosive atmospheres** or on our website www.crouzet.com

Low force position detector

- 100 % pneumatic
- Conforme à la norme DIN 41365 Forme A
- Faible effort d'actionnement < 50 g à 6 bars
- Pas de consommation permanente d'air comprimé



Also available in **ATEX** version for use in potentially explosive atmospheres in accordance with 94/9/EC Directive



Function



NO

NC

81 290 501

81 290 001

Symbol




Characteristics


Orifice diameter	mm	2	2
Operating pressure	bar	3 → 8	3 → 8
Flow at 4 bars	NI/min	100	100
Activation force at 6 bars	N	< 0,5	< 0,5
Permissible fluids (air / inert gas)		●	●
Max/min of fluid temperatures	°C	-10 → +50	-10 → +50
operating	°C	-10 → +60	-10 → +60
storage	°C	-40 → +70	-40 → +70
Mechanical life at 6 bars	operation	10 ⁷	10 ⁷
Response on activation	ms	≤ 15	≤ 15
time on release	ms	≤ 15	≤ 15
Barb connection for semi-rigid tubing		2.7 x 4	2.7 x 4
Weight	g	8.5	8.5

Principle of operation NC

Desactivated




Activated




Operation accessories

Unless otherwise requested, flat and roller-ended levers are supplied loose.

161 A
flat R 25.4
70 507 524




161 E
with roller R 24.1
70 507 529





Dimensions

DIN 41365 Form A

161 A
R 25.4 ±0,2



161 E
R 24.1 ±0,2

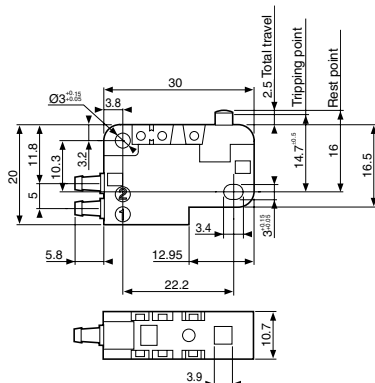

ATEX version products are available in the following catalogues: **Pneumatic products for explosive atmospheres** or on our website www.crouzet.com

“Microvalve” series position detectors

■ 100 % pneumatic



81 280



81 281

Version	NO	81 280 010	81 281 010	—	
	NC	81 280 510	81 281 510	81 283 510	
Features		Horizontal output	Vertical output	Rear connection by screw	

Features	Symbol
1. Symbol	
2. Symbol	
3. Symbol	
4. Symbol	
5. Symbol	
6. Symbol	
7. Symbol	
8. Symbol	
9. Symbol	
10. Symbol	
11. Symbol	
12. Symbol	
13. Symbol	
14. Symbol	
15. Symbol	
16. Symbol	
17. Symbol	
18. Symbol	
19. Symbol	
20. Symbol	
21. Symbol	
22. Symbol	
23. Symbol	
24. Symbol	
25. Symbol	
26. Symbol	
27. Symbol	
28. Symbol	
29. Symbol	
30. Symbol	
31. Symbol	
32. Symbol	
33. Symbol	
34. Symbol	
35. Symbol	
36. Symbol	
37. Symbol	
38. Symbol	
39. Symbol	
40. Symbol	
41. Symbol	
42. Symbol	
43. Symbol	
44. Symbol	
45. Symbol	
46. Symbol	
47. Symbol	
48. Symbol	
49. Symbol	
50. Symbol	
51. Symbol	
52. Symbol	
53. Symbol	
54. Symbol	
55. Symbol	
56. Symbol	
57. Symbol	
58. Symbol	
59. Symbol	
60. Symbol	
61. Symbol	
62. Symbol	
63. Symbol	
64. Symbol	
65. Symbol	
66. Symbol	
67. Symbol	
68. Symbol	
69. Symbol	
70. Symbol	
71. Symbol	
72. Symbol	
73. Symbol	
74. Symbol	
75. Symbol	
76. Symbol	
77. Symbol	
78. Symbol	
79. Symbol	
80. Symbol	
81. Symbol	
82. Symbol	
83. Symbol	
84. Symbol	
85. Symbol	
86. Symbol	
87. Symbol	
88. Symbol	
89. Symbol	
90. Symbol	
91. Symbol	
92. Symbol	
93. Symbol	
94. Symbol	
95. Symbol	
96. Symbol	
97. Symbol	
98. Symbol	
99. Symbol	
100. Symbol	

NO




NC



Characteristics

Operating pressure	bar	2 → 8	2 → 8	2 → 8
Orifice diameter	mm	2.7	2.7	
Flow at 6 bars	NI/min	200	200	138
Operating force at 6 bars	N	15	15	15
Effective travel	mm	1	1	1
Push-in connection for semi-rigid tubing (NFE 49100)	mm	Ø 4	Ø 4	Ø 4
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50
Mechanical life	operat.	5 x 10 ⁶	5 x 10 ⁶	5 x 10 ⁶
Weight	g	14	14	20


Principle of operation




Actuation positions :

PFC : End of travel position
PA : Operating position (max output kV)
PRT : Release position (max. exhaust kV)
PR : Rest position

NC




NO




Dimensions


81 281 010 - 81 281 510

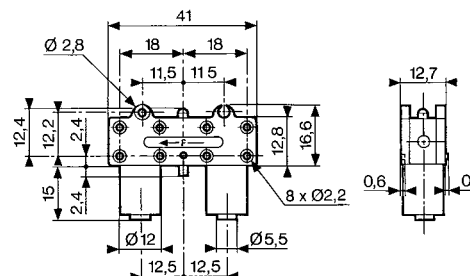

81 280 010 - 81 280 510





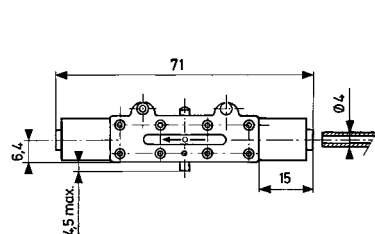


81 283 510






“Microvalve” series position detectors

■ 100 % pneumatic



Features			Short lever	With ball	Roller trip	With roller	Threaded barrel Ø 16 Plunger
Version	NC	Vertical output	81 281 502	81 281 504	81 281 508	81 281 509	81 737 501

Symbol




Characteristics


Operating pressure	bar	2 → 8	2 → 8	2 → 8	2 → 8	2 → 8
Orifice diameter	mm	2.7	2.7	2.7	2.7	2.7
Flow at 6 bars	NI/min	200	200	200	200	200
Operating force at 6 bars	N	15	15	15	15	25
Effective travel	mm	1	1	1	1	1
Push-in connection for semi-rigid tubing (NFE 49100)	mm	Ø 4	Ø 4	Ø 4	Ø 4	Ø 4
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50	-5 → +50	-5 → +50
Mechanical life	operat.	5 x 10 ⁶	5 x 10 ⁶	5 x 10 ⁶	5 x 10 ⁶	5 x 10 ⁶
Weight	g	16	18	18	18	90

Dimensions


81 281 502




81 281 504




81 281 508



81 281 509



81 737 501



Actuation positions :
PR : Rest position

"Miniature" series position detectors

- 100 % pneumatic
- All metal




Part numbers


Version	Push-in connection for semi-rigid tubing (NFE 49100)			
	Ø 4 silenced exhaust	81 921 501	81 921 701	81 921 702
NC	M5 connectable exhaust	—	—	—
	Ø 4 connectable exhaust *	—	—	—
	Ø 6 connectable exhaust *	—	—	—
NO	Ø 4 silenced exhaust	—	—	—
	Ø 6 silenced exhaust	—	—	—
Control		Simple plunger	Lever with plastic roller	Lever with roller bearing
			Lever with one-way trip plastic roller	

Symbol


NC



NC



NC




Characteristics


Operating pressure	bar	0.1 → 8	0.1 → 8	0.1 → 8	0.1 → 8
Orifice diameter	mm	2.7	2.7	2.7	2.7
Flow at 6 bars	NI/min	200	200	200	200
Actuation force at 6 bars	N	18	18	18	18
Circuit function : NC		—	—	—	—
Circuit function: NO		—	—	—	—
Connectable exhaust					
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50	-5 → +50
Mechanical life	operations	≥10 ⁷	≥10 ⁷	≥10 ⁷	≥10 ⁷
Weight	g	62	75	80	77

Principle of operation

NC




NO



Actuation travel

Vertical attack

Simple plunger




Actuation positions :


- PA : Operating position (max output kV)
- PFC : End of travel position
- PO : Mid-position closed (no exhaust, no outlet)
- PRT : Release position (max exhaust kV)
- PR : Rest position

Dimensions


81 921 501

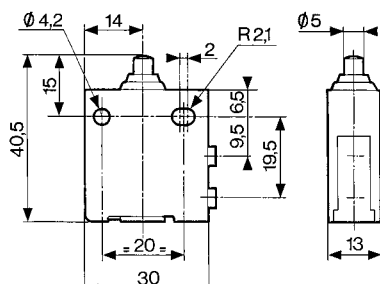

81 921 701 - 81 921 702

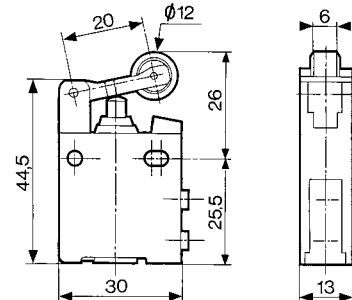


81 921 707




* with barb for tube Ø 2.7 x 4

Material: body zamak

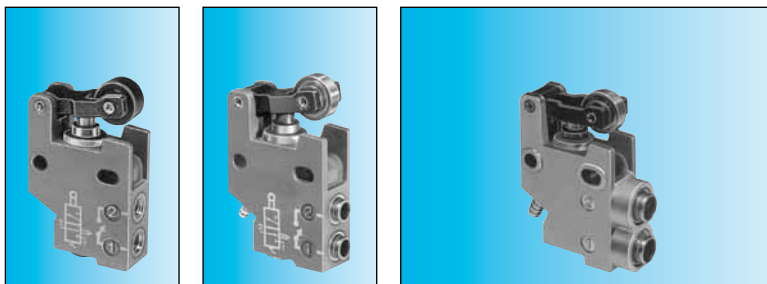

—	—	—	—
81 921 806	81 921 714	81 921 719	81 921 717
—	—	81 921 911	81 921 912
—	—	81 921 901	81 921 902
Lever with plastic roller	Lever with roller bearing	Lever with plastic roller	Lever with roller bearing

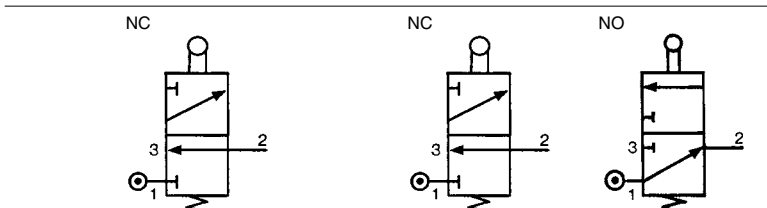

0.1 → 8	0.1 → 8	0.1 → 8	0.1 → 8
2.7	2.7	2.7	2.7
200	200	200	200
18	18	18	18
—	—	•	•
—	—	•	•
—5 → +50	—5 → +50	—5 → +50	—5 → +50
≥10 ⁷	≥10 ⁷	≥10 ⁷	≥10 ⁷
75	80	100	100





Horizontal actuating 30° cam (other angles of attack are also possible, 45° even 90°).

With lever

With lever

With lever




One-way trip lever



81 921 806

81 921 714



81 921 717 - 81 921 719
81 921 901 - 81 921 902
81 921 911 - 81 921 912



Material: body zamak
Other configuration on demand

"Compact" series position detectors




- 100 % pneumatic
- All metal

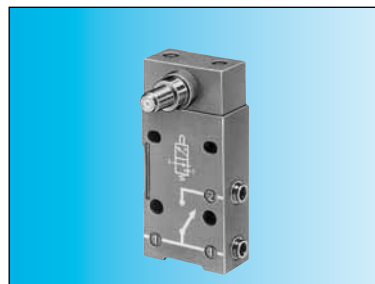

Part numbers

Features	Direct acting 81 922 401 Roller plunger with unthreaded barrel	Rotary actuator 81 922 205 Right-hand rotary head with roller lever (CNOMO)	Rotary actuator 81 922 010 Programmable rotary head without lever	Rotary actuator 81 922 210 Programmable rotary head without lever
Version				

Symbol




Characteristics

Connection	BSP	—	1/8	—	1/8
	push-in for semi-rigid tubing (NFE 49100)	mm	Ø 4	—	Ø 4
Operating pressure	bar	0.1 → 8	0.1 → 8	0.1 → 8	0.1 → 8
Bore diameter	mm	3	3	3	3
Flow at 6 bars	Nm³/h	200	200	200	200
Activation force at 6 bars	daN	2.5	2.5	2.5	2.5
Circuit function: NC		•	•	•	•
Mechanical life	operations	> 10 ⁷	> 10 ⁷	> 10 ⁷	> 10 ⁷
Silenced or connectable (1/8) exhaust		•	•	•	•
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50	-5 → +50
Weight	g	150	193	175	175

Accessories


Lever with roller	plastic	79 452 103	—	•	•	•
	bearing	79 452 104	—	•	•	•
Lever with adjustable roller	plastic	79 452 123	—	•	•	•
	bearing	79 452 124	—	•	•	•
Adjustable steel rod lever		79 452 133	—	•	•	•

Principle of operation



Vertical attack

Detectors with roller plunger with unthreaded barrel.



Actuation positions :

- PA : Operating position (max output kV)
- PFC : End of travel position
- PO : Mid-position closed (no exhaust, no outlet)
- PRT : Release position (max exhaust kV)
- PR : Rest position


The detectors 81 922 010 and 81 922 210 can operate to both left and right.

Material: body zamak

Other configuration on demand

Horizontal attack


Detectors with roller plunger with unthreaded barrel.



Rotary actuator


Detectors with levers

81 922 - 81 922 0 - 81 922 2

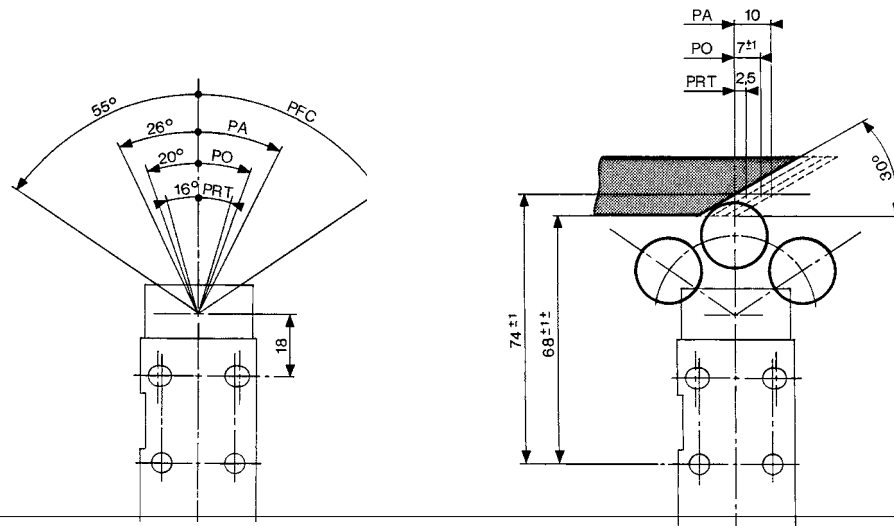


Dimensions


81 922 401

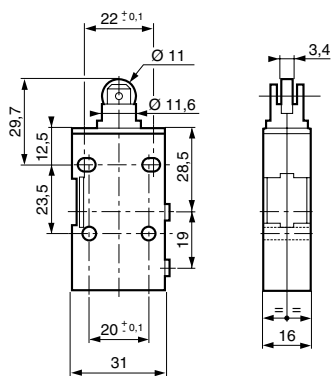


81 922 205 - 81 922 0 - 81 922 2
79 452 103 - 79 452 104

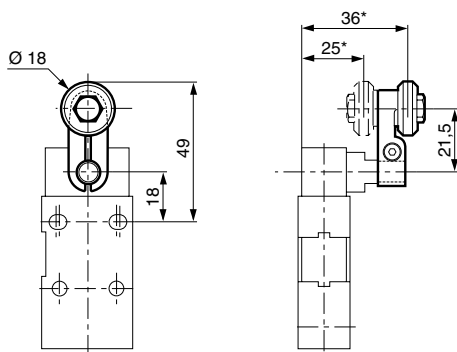

79 452 123 - 79 452 124


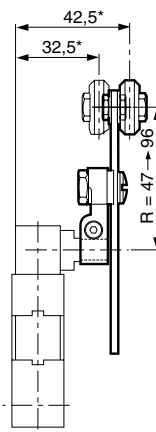


79 452 133

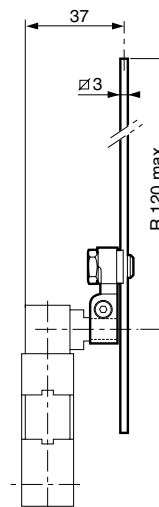

"Adjustable stop" series position detectors

- 100 % pneumatic
- All metal

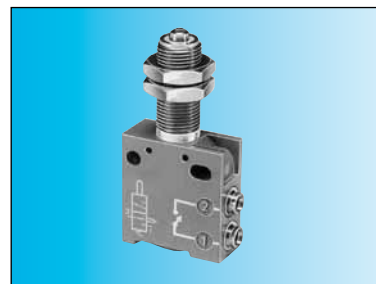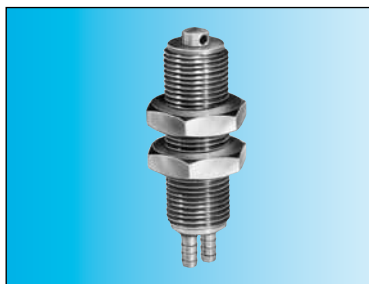

Part numbers

Push-in connection for semi-rigid tubing (NFE 49100)



81 923 001

Barb for tube 2.7 x 4

81 921 505

Push-in connector for tube Ø 4



Symbol



Characteristics

Operating pressure	bar	0,1 → 8	0,1 → 8
Orifice diameter	mm	2	2,7
Flow at 6 bars	NI/min	130	200
Actuation force at 6 bars	N	16	21
Circuit function: NC		●	●
Max. load: without shock	daN	1000	1000
Will stop a 63 mm Ø cylinder : 6 bar supply		●	●
Operating temperature	°C	-5 → +50	-5 → +50
Mechanical life	operations	≥10 ⁷	≥10 ⁷
Weight	g	27	90
Actuation positions			
PA : Operating position (max output kV)	mm	0,4	0,7
PFC : End of travel position	mm	0	0
PO : Mid-position closed (no exhaust, no outlet)	mm	0,9	1
PRT : Release position (max. exhaust kV)	mm	1,5	1,5
PR : Rest position	mm	3	3

Principle of operation

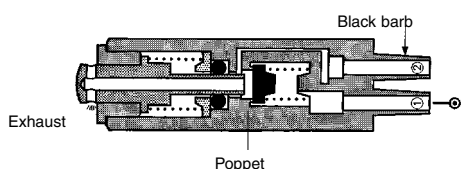

Versions	PO	PA	PFC	PRT	PR
With barb	0.9	0.4	0	1.5	3
Ø 4	1	0.7	0	1.5	3


Values in mm

Actuation positions :


- PA : Operating position (max output kV)
- PFC : End of travel position
- PO : Mid-position closed
(no exhaust, no outlet)
- PRT : Release position
(max exhaust kV)
- PR : Rest position

Dimensions

81 923 001




81 921 505



Fixing





This should be as close as possible to the plunger



Material: body zamak




Position detectors use with relay

- 100 % pneumatic
- All metal
- Low force operation <N 1
- Very low force Version 30 mN



References


Version	81 512 201 with ball	81 512 401 with wire	81 502 435 Positive	81 505 435 Negative
Symbol				



Characteristics


Push-in connection for semi-rigid tubing (NFE 49100)	mm	Ø 4	Ø 4		
Life at 6 bars	operations	10 ⁷	10 ⁷		
Actuation force at 6 bars	N	0,8	0,025		
Fluid used: that delivered by the leak sensor relay..		•	•		
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50	-5 → +50
Weight	g	24,5	23,5	35	35
Operating pressure	bar			2 → 8	2 → 8
Sensor consumption for relay supply at 6 bar	NI/			5	5
The distance between relay and sensor must be less than 15 m for a tube Ø 2.7 x 4 mm				•	•
Connection - sub-base see pages 54/55				•	•
Mechanical life	operations			≥10 ⁷	≥10 ⁷

Connection




Principle of operation

Supplied at industrial pressure, the relay produces a permanent bleed at its input port. A sensor shutting off this bleed causes the relay to switch.

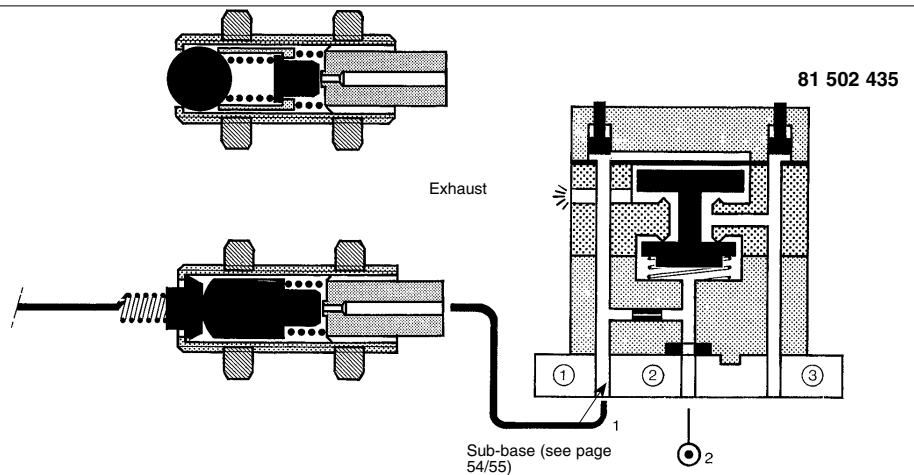


Dimensions


81 512 201



81 512 401

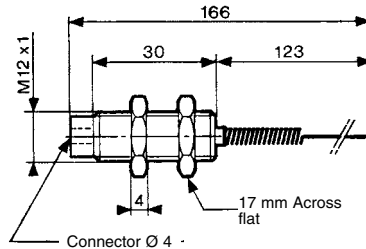


81 502 435 - 81 505 435

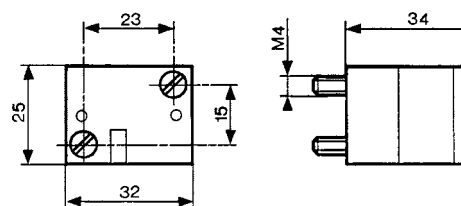

Material: brass




Position detectors

- 100 % pneumatic
- All metal
- Gap, proximity, paddle

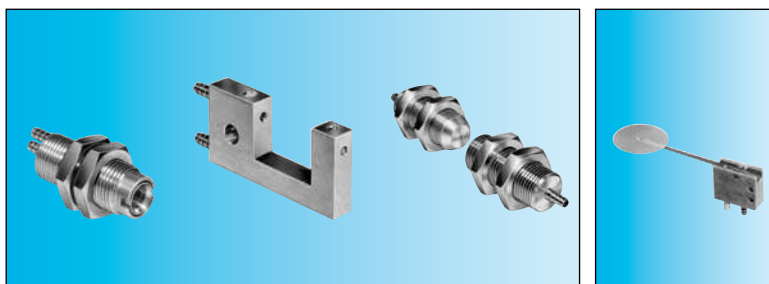

Part numbers




Detector	81 371 401 de proximité	81 372 201 gap	81 372 401 gap	81 372 901 with palette
Symbol				






Characteristics

Detection distance	mm	6 → 10	18	100	—
18 mm gap sensor		—	—	—	—
Supply pressure	bar	0.5 → 2.5	0.5 → 2.5	0.5 → 2.5	—
Minimum output pressure	mbar	1	5	5	—
Unlimited life (static component)		●	●	●	—
Operating temperature	°C	- 20 → +70	- 20 → +70	- 20 → +70	—
Consumption at supply pressure of:	NI/h	800	70	100	—
	NI/h	2500	2200	700	—
Barb connection for semi-rigid tubing (NFE 49100)	mm	Ø 2.7 x 4	Ø 2.7 x 4	Ø 2.7 x 4	Ø 2.7 x 4
Operating pressure	nozzle sensor	—	—	—	2 → 8
	d. detection 200 mm	—	—	—	2 → 8
	d. detection 100 mm	—	—	—	1 → 4
Flow	nozzle at 2 bars	—	—	—	320
	sensor at 2 bars	—	—	—	320
	at 2 bars	—	—	—	0.03
	at 6 bars	—	—	—	0.09
Sensor consumption for relay supply at 6 bars	NI/min	—	—	—	5
Weight	g	36	9	63	14

Principle of operation

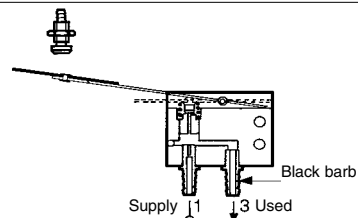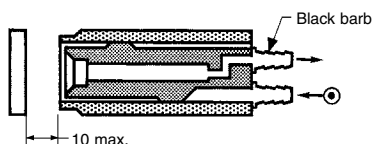


Connection




Encombrements


81 371 401




81 372 201



81 372 401

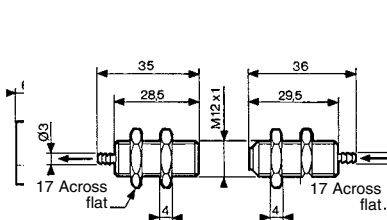

81 372 901


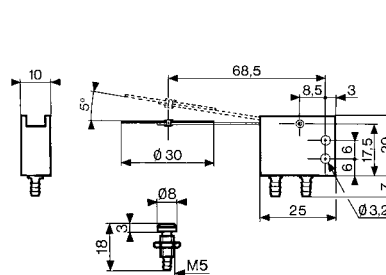


Amplifiers for mounting on installation plan

■ Gap sensor



Also available in **ATEX** version for use in potentially explosive atmospheres in accordance with 94/9/EC Directive

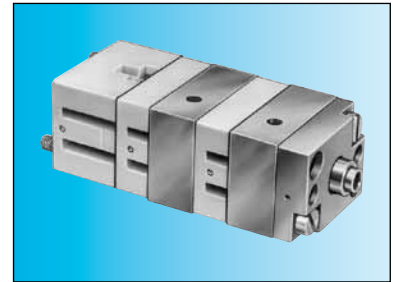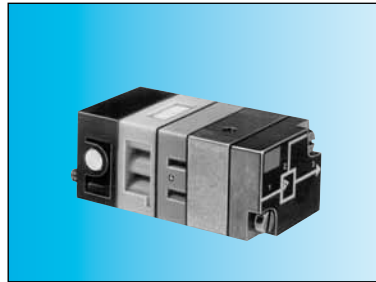

Part numbers

Simple amplifiers (for 81 372 201/401)

Sensitive amplifiers (for 81 371 401)

Version

Symbol

81 502 230

81 505 230

81 502 320





81 505 320

positive

negative

positive

negative



Characteristics



Pressure to make	mb	10 → 20	10 → 20	1 → 4	1 → 4
Operating pressure (non-lubricated air)	bar	2 → 8	2 → 8	2 → 6	2 → 6
Orifice diameter	mm	2.5	2.5	2.5	2.5
Average consumption at 4 bars	NI/min	5	5	5	5
Permissible overload for 1 hour	mb	800	800	800	800
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50	-5 → +50
Mechanical life	operations	3 x 10 ⁶	3 x 10 ⁶	3 x 10 ⁶	3 x 10 ⁶
Weight	g	150	150	185	185

Connections

Used for gaps up to 25 mm.

The supply to the sensor should be made via a pressure regulator or one-way flow restrictor (see page 52)

Connection - sub-base

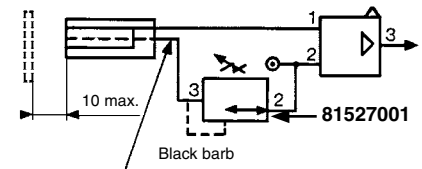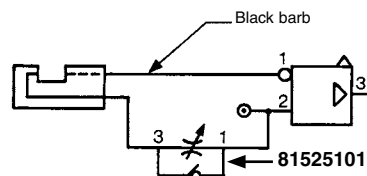


Principle of operation

Simple amplifiers

An output at normal industrial pressure is delivered on a low pressure input.

NB: Hysteresis is 20% of the pilot pressure.





81 502 230

81 505 230

Positive output

Negative output




1- pilot
2- supply
3- output

Sensitive amplifiers



An output at normal industrial pressure is delivered on a very low pressure input.

Note: The specifications are given for a supply pressure of 6 bars, and for detection at the mid-point of the gap.




81 502 320

81 505 320




Dimensions

81 502 238 - 81 505 231

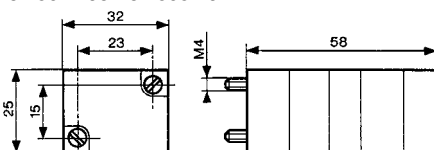

81 502 322 - 81 505 321

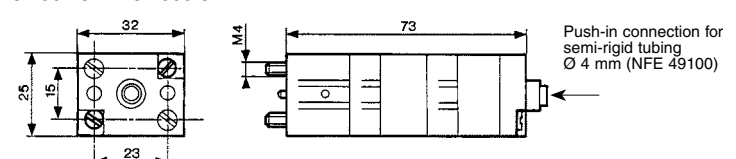

Other information

With gap sensors, use an amplifier with negative output if you require a signal on interruption of the jet.

ATEX version products are available in the following catalogues: **Pneumatic products for explosive atmospheres** or on our website www.crouzet.com

Amplifier with intégral régulateur, positive output

- Setting Flow
- Fixing rail 35mm wide




Part numbers

Amplifiers with integral regulator
Version

81 510 001
Positive output

Symbol




Characteristics

Pressure to make	mb	0.5 → 1.5	—	—
Reduced pressure supplied at port 8	bar	0.5 → 2.5	—	—
Flow through port 8	Nm³/h	0.1 → 2.5	—	—
Consumption of amplifier only	NI/h	100 → 200	—	—
Permissible overload for 1 hour	mb	300	—	—
Operating temperature	°C	-5 → +50	-5 → +50	-5 → +50
Mechanical life	operations	3 x 10 ⁶	3 x 10 ⁶	3 x 10 ⁶
Weight	g	380	—	—
Detectors (see page 28)		Proximity Ø 12	Gap Ø 18	Proximity Ø 12
Nominal range	mm	81 371 401	81 372 201	81 372 401
Min. total consumption for detection (0.5 b regulated pressure)		8	18	100
Max. total consumption for short response time (2.5 b regulated pressure)	NI/h	880	140	—
Min. detectable	NI/h	2750	400	920
dimensions nominal sensing distance	mm	Ø 3	Ø 2 - Ø 1.5	Ø 7 - Ø 6.5
Max. frequency of use	2	2	—	—
Force exerted by the jet on the parts to be detected	Hz	5	5	5
	N	0.02 → 0.7	0.01 → 0.03	0.1

Connection


To use with detectors page 32

Principle of operation

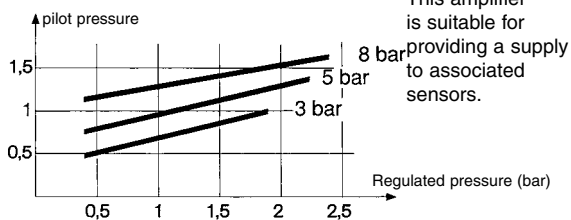


Dimensions


Push-in connection for semi-rigid tubing Ø 4 mm (NFE 49100)

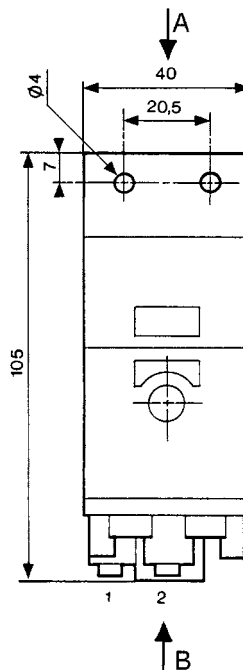

Viewed from B



Viewed from A





ООО «НИОКРсистемс» - это оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов. Реализуемая нашей компанией продукция насчитывает более полумиллиона наименований.

Благодаря этому наша компания предлагает к поставке практически не ограниченный ассортимент компонентов как оптовыми, мелкооптовыми партиями, так и в розницу.

Благодаря развитой сети поставщиков, помогаем в поиске и приобретении экзотичных или снятых с производства компонентов.

Наша компания это:

- Гарантия качества поставляемой продукции
- Широкий ассортимент
- Минимальные сроки поставок
- Техническая поддержка
- Подбор комплектации
- Индивидуальный подход
- Гибкое ценообразование
- Работаем по 275 ФЗ